



Pin#	尺寸A	尺寸B
2	1.0	2
3	2.0	3.0
4	3.0	4.0
5	4.0	5.0
6	5.0	6.0
7	6.0	7.0
8	7.0	8.0
9	8.0	9.0
10	9.0	10.0
11	10.0	11.0
12	11.0	12.0
13	12.0	13.0
14	13.0	14.0
15	14.0	15.0
16	15.0	16.0
17	16.0	17.0
18	17.0	18.0
19	18.0	19.0
20	19.0	20.0
21	20.0	21.0
22	21.0	22.0
23	22.0	23.0
24	23.0	24.0
25	24.0	25.0
26	25.0	26.0
27	26.0	27.0
28	27.0	28.0
29	28.0	29.0
30	29.0	30.0
31	30.0	31.0
32	31.0	32.0
33	32.0	33.0
34	33.0	34.0
35	34.0	35.0
36	35.0	36.0
37	36.0	37.0
38	37.0	38.0
39	38.0	39.0
40	39.0	40.0
41	40.0	41.0
42	41.0	42.0
43	42.0	43.0
44	43.0	44.0
45	44.0	45.0
46	45.0	46.0
47	46.0	47.0
48	47.0	48.0
49	48.0	49.0
50	49.0	50.0

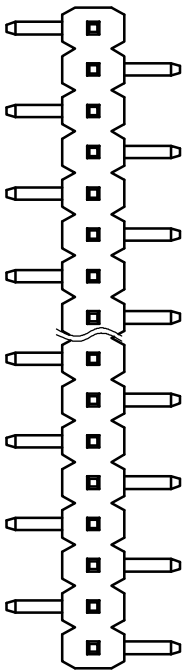

TYPE 1

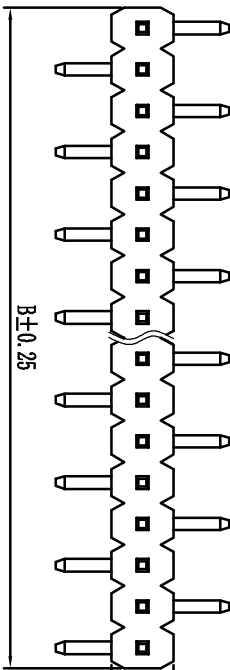


TYPE 2


Height
H=1.0mm
H=1.5mm

技术规范:


- 额定电流 : 0.75AMP
- 适用温度 : -40℃to+105℃
- 接触电阻 : 30mΩ Max
- 绝缘电阻 : 1000MΩ Min
- 耐电压 : AC 500V
- 绝缘材料 : Polyester (UL94V-0)
- Standard: PA-6T
- 端子材质 : Brass
- 电镀规范 : Au or Sn Over 50u" Ni



PCB LAYOUT

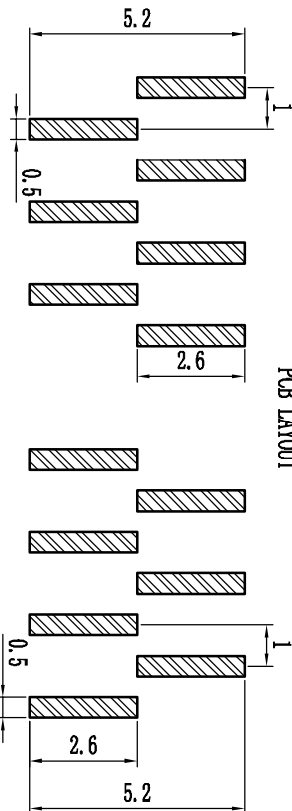

P 2-XX-1-1-XX-X-X-M-X									
排针系列	间距	塑壳	双塑	单排	Pin数	电镀	材质	角度	流水号
1-0.8mm	1.0-10	1-10	1-单塑	1-单排	1~40P/50P	A-10°	A-PBT	S-180°	0-3.0
2-1.0mm	1.5-15	1-5-15	2-双塑	2-双排	2~40/50P	B-30°	B-P46	B-90°	1-3.0/6.0(双塑)
3-1.27mm			3-三塑	3-三排	3~40/50P	C-50°	C-P6T	H-SMT	2-3.0/3.0(双塑)
4-2.0mm					4~40/50P	D-100°	D-P6T	F-2型	3-2.8/4.0(双塑)
5-2.5mm						E-150°	E-10P	V-135°	4-2.6/3.5(双塑)
6-2.54mm						F-300°		L-卧式SMT	其它另做说明
7-3.96mm						S-数据			
8-6.00mm						H-半全铜			



东莞康导电子科技有限公司

变更单号	变更标记	变更日期	变更人	审核	批准	未标公差	比例	1:1	单位	mm	页数	1 OF 1	A0
						角度	±2°						
						X.	±0.25	设计	日期		1.0mm单排针, 180°, 单塑, 塑高1.0/1.5mm		
						.X	±0.15	审核	日期		Spec:1.0mm Pin Header, Single Row, SMT		
						.XX	±0.05	批准	日期		Positions: 1X1~1X50		
											Plastics Height: 1.0/1.5mm		