



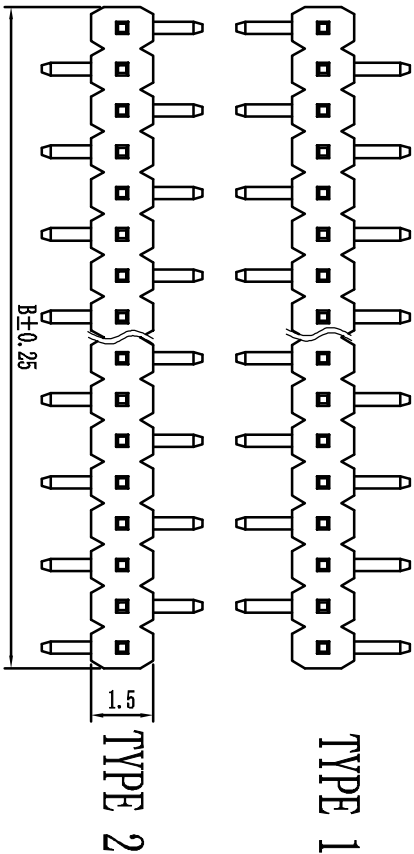

Height
H=1.0mm
H=1.5mm



技术规范:

额定电流 : 0.75AMP

适用温度 : -40℃to+105℃

接触电阻 : 30mΩ Max

绝缘电阻 : 1000MΩ Min


耐电压 : AC 500V

绝缘材料 : Polyester (UL94V-0)


Standard: PA-6T

端子材质 : Brass

电镀规范 : Au or Sn Over 50μ" Ni

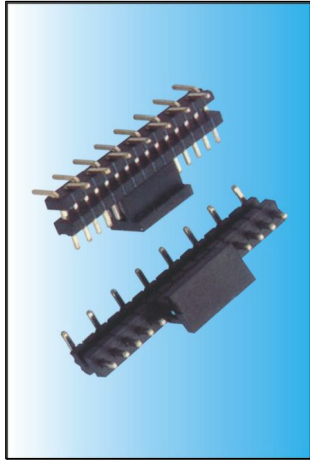

Pin#	尺寸A	尺寸B
2	1.0	2
3	2.0	3.0
4	3.0	4.0
5	4.0	5.0
6	5.0	6.0
7	6.0	7.0
8	7.0	8.0
9	8.0	9.0
10	9.0	10.0
11	10.0	11.0
12	11.0	12.0
13	12.0	13.0
14	13.0	14.0
15	14.0	15.0
16	15.0	16.0
17	16.0	17.0
18	17.0	18.0
19	18.0	19.0
20	19.0	20.0
21	20.0	21.0
22	21.0	22.0
23	22.0	23.0
24	23.0	24.0
25	24.0	25.0
26	25.0	26.0
27	26.0	27.0
28	27.0	28.0
29	28.0	29.0
30	29.0	30.0
31	30.0	31.0
32	31.0	32.0
33	32.0	33.0
34	33.0	34.0
35	34.0	35.0
36	35.0	36.0
37	36.0	37.0
38	37.0	38.0
39	38.0	39.0
40	39.0	40.0
41	40.0	41.0
42	41.0	42.0
43	42.0	43.0
44	43.0	44.0
45	44.0	45.0
46	45.0	46.0
47	46.0	47.0
48	47.0	48.0
49	48.0	49.0
50	49.0	50.0

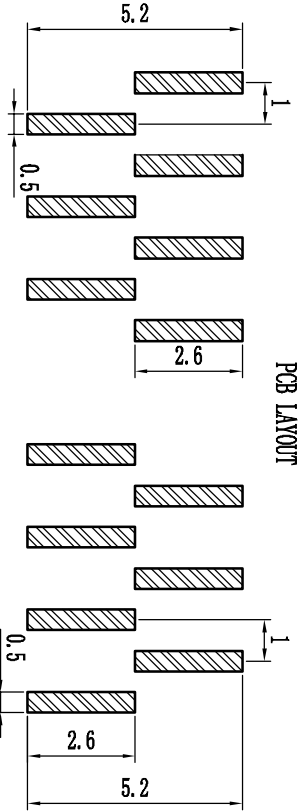

TYPE 2

TYPE 1

P	2	XX	2	1	XX	X	X	M	X
排针系列	间距	塑壳	双塑壳	单排	Pin#	电镀	材质	角度	流水号
1-0.8mm	1.0-10	1-单塑壳	1-单排	1"40P/50P	A-10"	A-10"	A-10T	S-180°	0-3.0
2-1.0mm	1.5-15	2-双塑壳	2-双排	2"40P/50P	B-30"	B-30"	B-30T	E-90°	1-3.0/6.0(双塑壳)
3-1.27mm		3-三塑壳	3-三排	3"40P/50P	C-50"	C-50"	C-50T	H-50°	2-3.0/3.0(双塑壳)
4-2.0mm		4-四排	4-四排	4"40P/50P	D-100"	D-100"	D-100T	F-2型	3-2.8/4.0(双塑壳)
5-2.5mm					E-150"	E-150"	E-150T	V=135°	4-2.6/3.5(双塑壳)
6-3.5mm					F-300"	F-300"	F-300T	L-卧式SMT	其它另做说明
7-3.96mm					S-数轴	S-数轴	S-数轴		
8-5.08mm					H-半全轴	H-半全轴	H-半全轴		

东莞康导电子科技有限公司

变更单号	变更标记	变更日期	变更人	审核	批准	未标公差	比例	1:1	单位	mm	页数	1 OF 1	A0	
						角度	±2°							
						X.	±0.25	设计	日期		1.0mm单排针, SMT, 双塑, 塑高1.0/1.5mm			
						.X	±0.15	审核	日期		Spec:1.0mm Board Spacer, Single Row, SMT			
						.XX	±0.05	批准	日期		Positions: 1X11X50			
											Plastics Height: 1.0/1.5mm			