

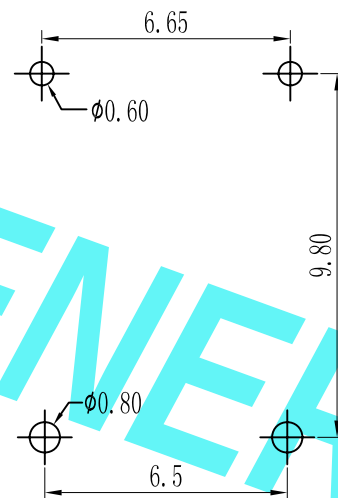
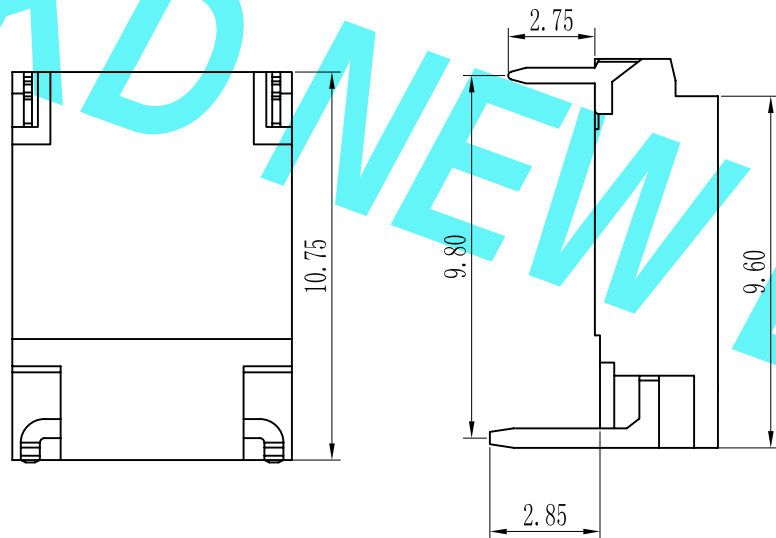


环保物料



P. C. B LAYOUT



技术参数 SPECIFICATIONS

- ◆间距: 3.5 Pitch:3.5
- ◆适用线规: AWG#32-#28
Applicable Wire:AWG#32-#28
- ◆额定电压: AC, DC, 100V (有效值)
Voltage rating: AC, DC, 100V(rms)
- ◆额定电流: 1A, AC, DC
Current rating:1A, AC, DC
- ◆耐压值: 800V AC/minute
Withstand voltage:800V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: $\geq 500M\Omega$
Insulation resistance: $\geq 500M\Omega$
- ◆接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0



GENERAL TOLERANCES

LINEAR ANGLES

0.0±0.25 X° REF±6°

0.00±0.15 X° ±3°

0.000±0.08 X° X'±2°

SCALE:
1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN

肖丽娟

2018. 11. 19



东莞市康导新能源科技有限公司

DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD

公司网址: www.dgkonne.cn 公司电话: 0769-85337533
邮箱: 2850175986@qq.com 公司传真: 0769-85392827

TITLE:

3.50mm pitch Single Wafer

PART. NO:

3505-02

DWG. NO:

REV: A0

SHEET: 1/1

A0 新图面发行

2018. 11. 19

UNIT: MM

SIZE: A4

REVISION RECORD

DATE