
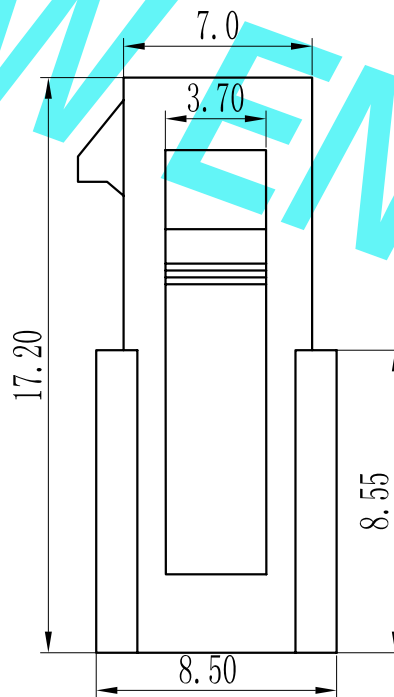
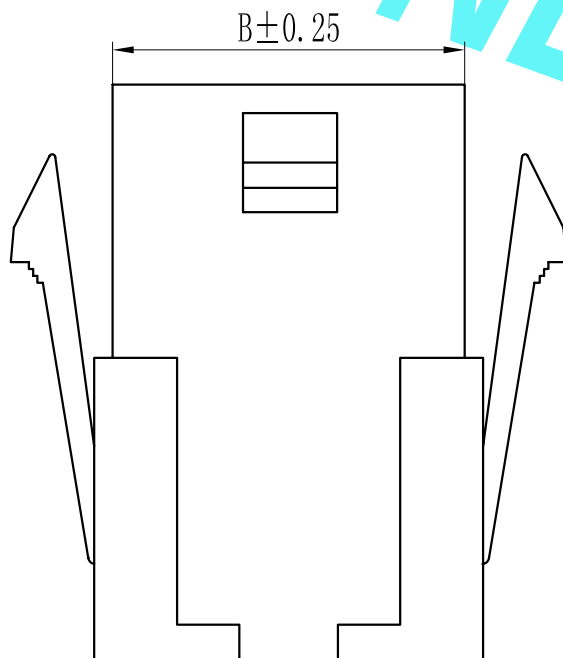


环保物料

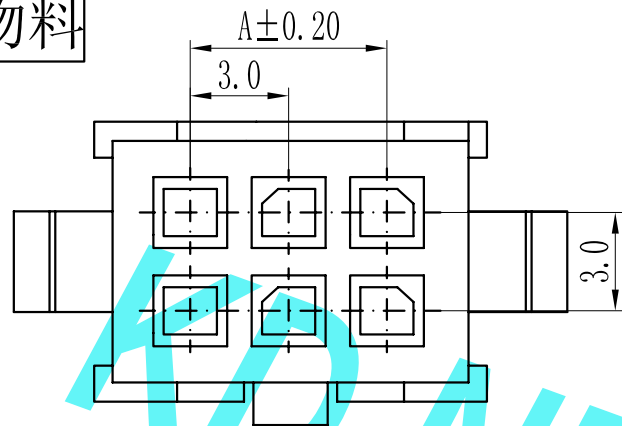

技术参数 SPECIFICATIONS

- ◆间距: 3.0 Pitch:3.0
- ◆适用线规: AWG#20-#24
Applicable Wire:AWG#20-#24
- ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC,DC, 250V(rms)
- ◆额定电流: 5A, AC, DC
Current rating:5A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -40℃~+105℃
Working Temp:-40℃~+105℃
- ◆绝缘电阻: ≥100MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤10mΩ
Contact resistance:≤10mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

线数 Poles	尺寸 Dimensions(mm)			
	A	B	C	D
2x1	N/A	3.85	4.21	7.90
2x2	3.0	6.85	7.21	10.90
2x3	6.0	9.85	10.21	13.89
2x4	9.0	12.85	13.21	16.89
2x5	12.0	15.85	16.21	19.89
2x6	15.0	18.85	19.21	22.89
2x7	18.0	21.85	22.20	25.88
2x8	21.0	24.85	25.21	28.88
2x9	24.0	27.85	28.20	31.88
2x10	27.0	30.85	31.22	34.87
2x11	30.0	33.85	34.22	37.87
2x12	33.0	36.85	37.22	40.87

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 3020E-2×XX	
				LINEAR	ANGLES	APPROVED					
				0.0±0.25	X° REF±6°						
AO	新图面发行	2018.07.28	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				TITLE:	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.07.28	3.00mm pitch Dual Housing	REV: AO	SHEET: 1/1