
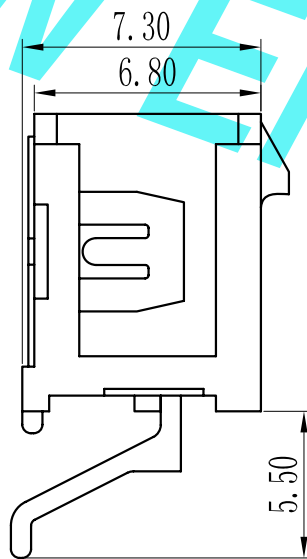
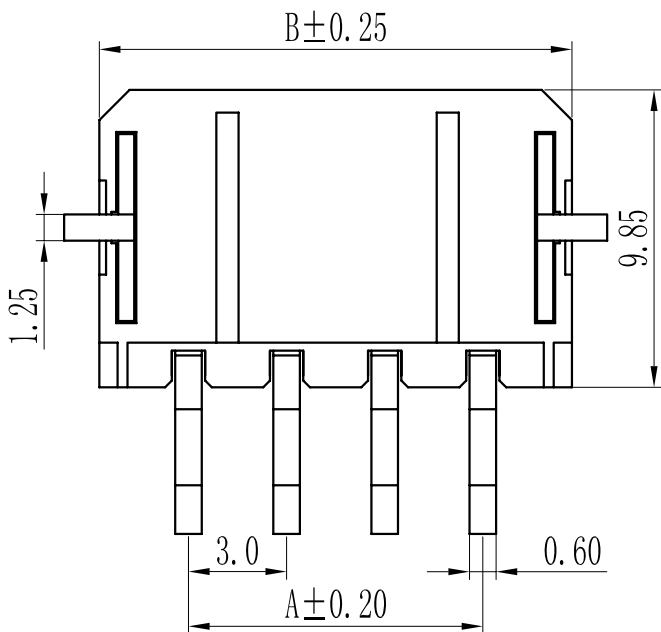
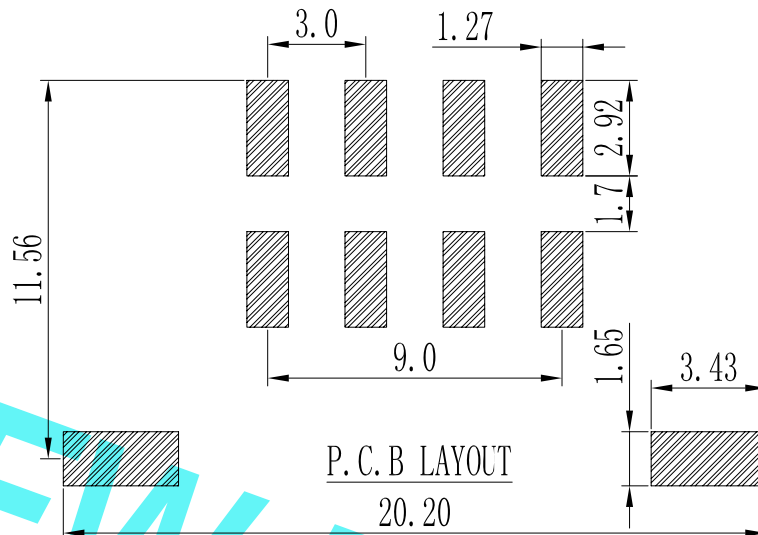


环保物料

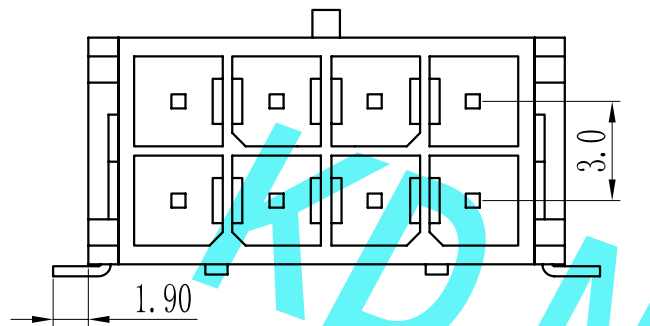

#### 技术参数 SPECIFICATIONS

- ◆间距: 3.0 Pitch:3.0
- ◆适用线规: AWG#20-#24  
Applicable Wire:AWG#20-#24
- ◆额定电压: AC, DC, 250V (有效值)  
Voltage rating: AC, DC, 250V(rms)
- ◆额定电流: 5A, AC, DC  
Current rating:5A, AC, DC
- ◆耐压值: 1500V AC/minute  
Withstand voltage:1500V AC/minute
- ◆工作温度: -40℃~+105℃  
Working Temp:-40℃~+105℃
- ◆绝缘电阻: ≥100MΩ  
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤10mΩ  
Contact resistance:≤10mΩ

#### 材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0  
Insulator:Nylon66 UL94-0
- ◆接触针: 黄铜  
Contact PIN: Brass

| 线数<br>Poles | 尺寸 Dimensions(mm) |      |
|-------------|-------------------|------|
|             | A                 | B    |
| 2x1         | N/A               | 6.7  |
| 2x2         | 3.0               | 9.7  |
| 2x3         | 6.0               | 12.7 |
| 2x4         | 9.0               | 15.7 |
| 2x5         | 12.0              | 18.7 |
| 2x6         | 15.0              | 21.7 |
| 2x7         | 18.0              | 24.7 |
| 2x8         | 21.0              | 27.7 |
| 2x9         | 24.0              | 30.7 |
| 2x10        | 27.0              | 33.7 |
| 2x11        | 30.0              | 36.7 |
| 2x12        | 33.0              | 39.7 |

|      |                 |            |          |                    |           |               |      |            |                                                                                                                                                                                               |                          |         |            |
|------|-----------------|------------|----------|--------------------|-----------|---------------|------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|---------|------------|
|      |                 |            |          | GENERAL TOLERANCES |           | SCALE:<br>1:1 | NAME | DATE       | <br>东莞市康导新能源科技有限公司<br>DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD<br>公司地址: <a href="http://www.dgconne.cn">www.dgconne.cn</a> 公司电话: 0769-85337633<br>邮 箱: 2850175868@qq.com 公司传真: 0769-85392827 | PART. NO:<br><br>3048-XX |         |            |
|      |                 |            |          | LINEAR             | ANGLES    | APPROVED      |      |            |                                                                                                                                                                                               | DWG. NO:                 |         |            |
|      |                 |            |          | 0.0±0.25           | X° REF±6° |               |      |            |                                                                                                                                                                                               |                          |         |            |
| AO   | 新图面发行           | 2018.07.28 | UNIT: MM | 0.00±0.15          | X° ±3°    | DESIGNER      |      |            |                                                                                                                                                                                               |                          | TITLE:  |            |
| REV. | REVISION RECORD | DATE       | SIZE: A4 | 0.000±0.08         | X° X'±2°  | DRAWN         | 肖丽娟  | 2018.07.28 | 3.00mm pitch Dual Wafer                                                                                                                                                                       |                          | REV: AO | SHEET: 1/1 |