


环保物料

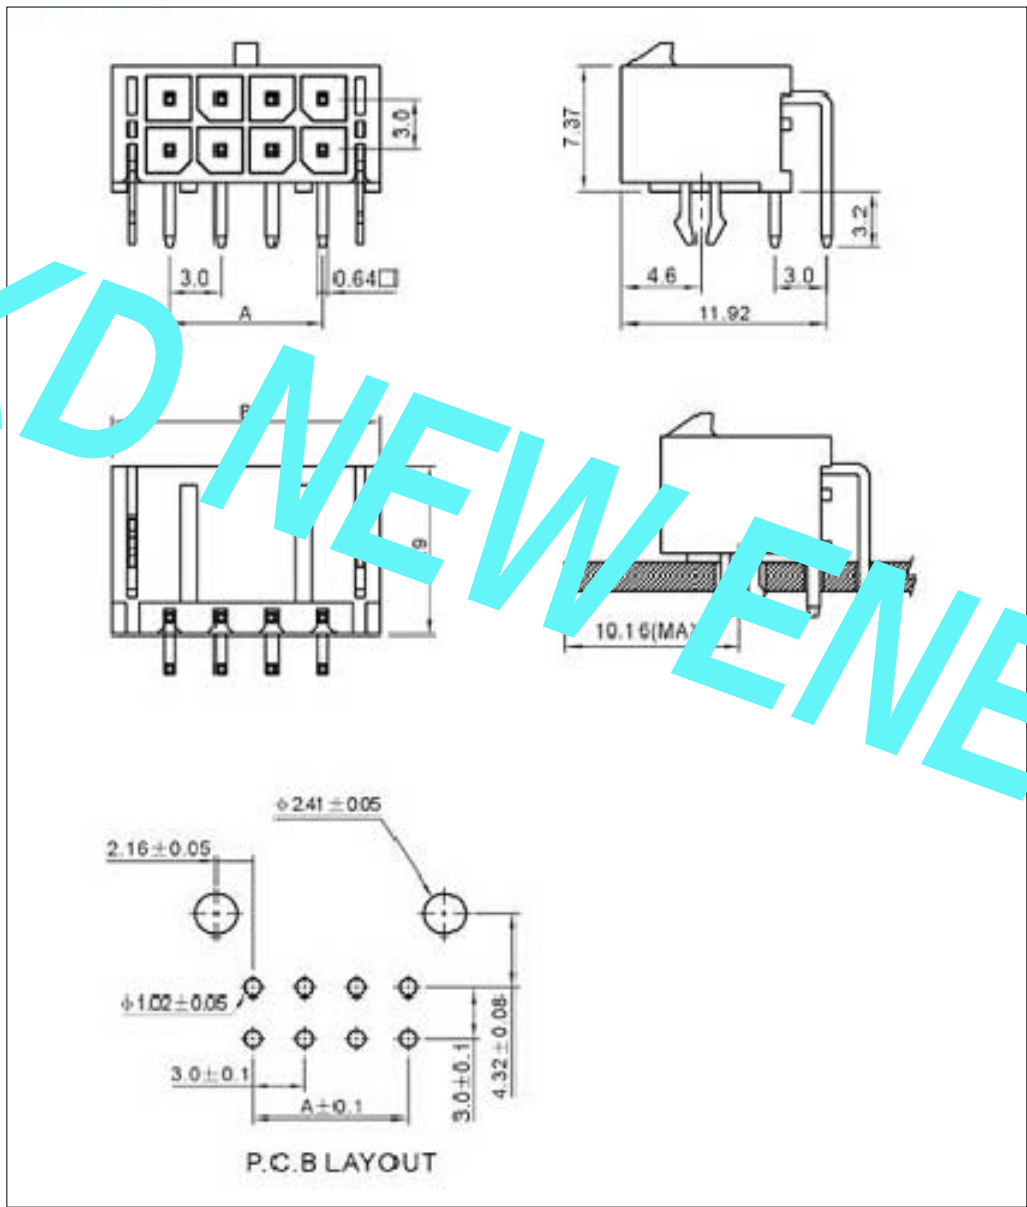

技术参数 SPECIFICATIONS

- ◆间距: 3.0 Pitch:3.0
- ◆适用线规: AWG#20-#24  
Applicable Wire:AWG#20-#24
- ◆额定电压: AC,DC,250V (有效值)  
Voltage rating: AC,DC,250V(rms)
- ◆额定电流: 5A,AC,DC  
Current rating:5A,AC,DC
- ◆耐压值: 1500V AC/minute  
Withstand voltage:1500V AC/minute
- ◆工作温度: -40℃~+105℃  
Working Temp:-40℃~+105℃
- ◆绝缘电阻: ≥100MΩ  
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤10mΩ  
Contact resistance:≤10mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0  
Insulator:Nylon66 UL94-0
- ◆接触针: 黄铜  
Contact PIN: Brass

| 线数<br>Poles | 尺寸<br>Dimensions (mm) |      |
|-------------|-----------------------|------|
| 2x1         | A                     | 6.7  |
| 2x2         | B                     | 9.7  |
| 2x3         | C                     | 12.7 |
| 2x4         | D                     | 15.7 |
| 2x5         | E                     | 18.7 |
| 2x6         | F                     | 21.7 |
| 2x7         | G                     | 24.7 |
| 2x8         | H                     | 27.7 |
| 2x9         | I                     | 30.7 |
| 2x10        | J                     | 33.7 |
| 2x11        | K                     | 36.7 |
| 2x12        | L                     | 39.7 |

| GENERAL TOLERANCES |  | SCALE:    |  | NAME     |  | DATE                    |  | PART. NO:  |  |
|--------------------|--|-----------|--|----------|--|-------------------------|--|------------|--|
| LINEAR             |  | ANGLES    |  | APPROVED |  | DESIGNER                |  | DWG. NO:   |  |
| 0.0±0.25           |  | X° REF±6° |  | DRAWN    |  | 肖丽娟                     |  | REV: A0    |  |
| 0.00±0.15          |  | X° ±3°    |  | TITLE:   |  | 3.00mm pitch Dual Wafer |  | SHEET: 1/1 |  |
| 0.000±0.08         |  | X° X'±2°  |  |          |  |                         |  |            |  |