


1		2		3		4		5		6		7		8																																																																																	
环保物料																																																																																															
<table><tr><td>Pin数</td><td>尺寸A</td><td>尺寸B</td></tr><tr><td>2</td><td>3.96</td><td>9.06</td></tr><tr><td>3</td><td>7.92</td><td>13.02</td></tr><tr><td>4</td><td>11.88</td><td>16.98</td></tr><tr><td>5</td><td>15.84</td><td>20.94</td></tr><tr><td>6</td><td>19.80</td><td>24.90</td></tr><tr><td>7</td><td>23.76</td><td>28.86</td></tr><tr><td>8</td><td>27.72</td><td>32.82</td></tr><tr><td>9</td><td>31.68</td><td>36.78</td></tr><tr><td>10</td><td>35.64</td><td>40.74</td></tr><tr><td>11</td><td>39.60</td><td>44.70</td></tr><tr><td>12</td><td>43.56</td><td>48.66</td></tr><tr><td>13</td><td>47.52</td><td>52.62</td></tr><tr><td>14</td><td>51.48</td><td>56.58</td></tr><tr><td>15</td><td>55.44</td><td>60.54</td></tr><tr><td>16</td><td>59.40</td><td>64.50</td></tr><tr><td>17</td><td>63.36</td><td>68.46</td></tr><tr><td>18</td><td>67.32</td><td>72.42</td></tr><tr><td>19</td><td>71.28</td><td>76.38</td></tr><tr><td>20</td><td>75.24</td><td>80.34</td></tr></table> 技术参数 SPECIFICATIONS ◆间距: 3.96 Pitch:3.96 ◆适用线规: AWG#24-#18 Applicable Wire:AWG#24-#18 ◆额定电压: AC,DC,250V (有效值) Voltage rating: AC,DC,250V(rms) ◆额定电流: 5A,AC,DC Current rating:5A,AC,DC ◆耐压值: 1500V AC/minute Withstand voltage:1500V AC/minute ◆工作温度: -25℃~+85℃ Working Temp:-25℃~+85℃ ◆绝缘电阻: ≥1000MΩ Insulation resistance:≥1000MΩ ◆接触电阻: ≤20mΩ Contact resistance:≤20mΩ 材料 MATERIAL ◆绝缘体: 尼龙66, UL94-0 Insulator:Nylon66 UL94-0																Pin数	尺寸A	尺寸B	2	3.96	9.06	3	7.92	13.02	4	11.88	16.98	5	15.84	20.94	6	19.80	24.90	7	23.76	28.86	8	27.72	32.82	9	31.68	36.78	10	35.64	40.74	11	39.60	44.70	12	43.56	48.66	13	47.52	52.62	14	51.48	56.58	15	55.44	60.54	16	59.40	64.50	17	63.36	68.46	18	67.32	72.42	19	71.28	76.38	20	75.24	80.34																				
Pin数	尺寸A	尺寸B																																																																																													
2	3.96	9.06																																																																																													
3	7.92	13.02																																																																																													
4	11.88	16.98																																																																																													
5	15.84	20.94																																																																																													
6	19.80	24.90																																																																																													
7	23.76	28.86																																																																																													
8	27.72	32.82																																																																																													
9	31.68	36.78																																																																																													
10	35.64	40.74																																																																																													
11	39.60	44.70																																																																																													
12	43.56	48.66																																																																																													
13	47.52	52.62																																																																																													
14	51.48	56.58																																																																																													
15	55.44	60.54																																																																																													
16	59.40	64.50																																																																																													
17	63.36	68.46																																																																																													
18	67.32	72.42																																																																																													
19	71.28	76.38																																																																																													
20	75.24	80.34																																																																																													
H																																																																																															
<table><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2">GENERAL TOLERANCES</td><td colspan="2">SCALE: 1:1</td><td colspan="2">NAME</td><td colspan="2">DATE</td><td colspan="2">东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175966@qq.com 公司传真: 0769-85392827</td><td colspan="2">PART. NO: 3962-XX</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2">LINEAR</td><td colspan="2">ANGLES</td><td colspan="2">APPROVED</td><td colspan="2"></td><td colspan="2"></td><td colspan="2">DWG. NO:</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2">0.0±0.25</td><td colspan="2">X° REF±6°</td><td colspan="2">DESIGNER</td><td colspan="2"></td><td colspan="2"></td><td colspan="2">REV: AO</td></tr><tr><td colspan="2">AO</td><td colspan="2">新图面发行</td><td colspan="2">2018.11.21</td><td colspan="2">UNIT: MM</td><td colspan="2">0.00±0.15</td><td colspan="2">X° ±3°</td><td colspan="2">TITLE: 3.96mm pitch Single Housing</td><td colspan="2">SHEET: 1/1</td></tr><tr><td colspan="2">REV.</td><td colspan="2">REVISION RECORD</td><td colspan="2">DATE</td><td colspan="2">SIZE: A4</td><td colspan="2">0.000±0.08</td><td colspan="2">X° X'±2°</td><td colspan="2">DRAWN 肖丽娟</td><td colspan="2">2018.11.21</td></tr></table>																				GENERAL TOLERANCES		SCALE: 1:1		NAME		DATE		东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175966@qq.com 公司传真: 0769-85392827		PART. NO: 3962-XX						LINEAR		ANGLES		APPROVED						DWG. NO:						0.0±0.25		X° REF±6°		DESIGNER						REV: AO		AO		新图面发行		2018.11.21		UNIT: MM		0.00±0.15		X° ±3°		TITLE: 3.96mm pitch Single Housing		SHEET: 1/1		REV.		REVISION RECORD		DATE		SIZE: A4		0.000±0.08		X° X'±2°		DRAWN 肖丽娟		2018.11.21	
				GENERAL TOLERANCES		SCALE: 1:1		NAME		DATE		东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175966@qq.com 公司传真: 0769-85392827		PART. NO: 3962-XX																																																																																	
				LINEAR		ANGLES		APPROVED						DWG. NO:																																																																																	
				0.0±0.25		X° REF±6°		DESIGNER						REV: AO																																																																																	
AO		新图面发行		2018.11.21		UNIT: MM		0.00±0.15		X° ±3°		TITLE: 3.96mm pitch Single Housing		SHEET: 1/1																																																																																	
REV.		REVISION RECORD		DATE		SIZE: A4		0.000±0.08		X° X'±2°		DRAWN 肖丽娟		2018.11.21																																																																																	
1		2		3		4		5		6		7		8																																																																																	

Pin数	尺寸A	尺寸B
2	3.96	9.06
3	7.92	13.02
4	11.88	16.98
5	15.84	20.94
6	19.80	24.90
7	23.76	28.86
8	27.72	32.82
9	31.68	36.78
10	35.64	40.74
11	39.60	44.70
12	43.56	48.66
13	47.52	52.62
14	51.48	56.58
15	55.44	60.54
16	59.40	64.50
17	63.36	68.46
18	67.32	72.42
19	71.28	76.38
20	75.24	80.34

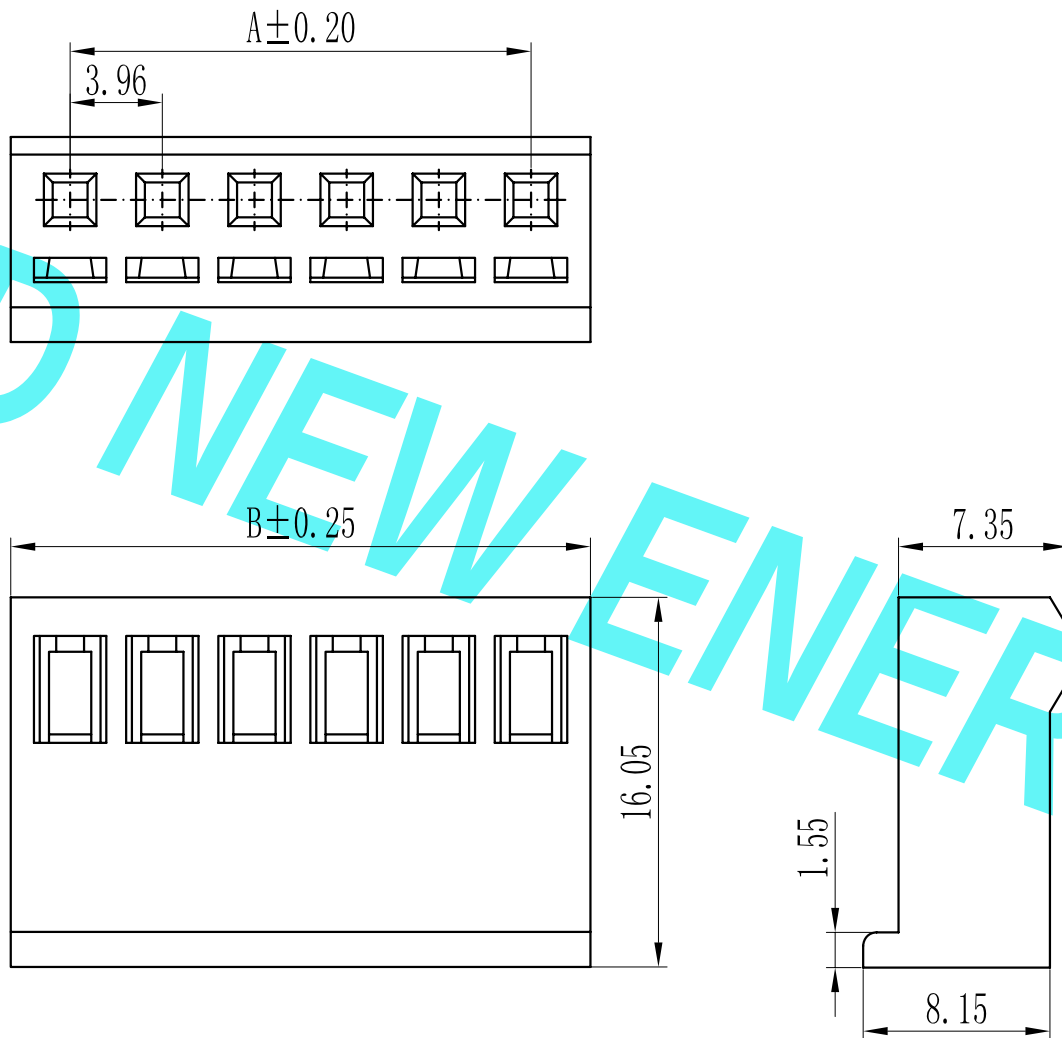

- ◆间距: 3.96 Pitch:3.96
- ◆适用线规: AWG#24-#18
Applicable Wire:AWG#24-#18
- ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC,DC, 250V(rms)
- ◆额定电流: 5A, AC, DC
Current rating:5A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度 : -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻 : $\geq 1000\text{M}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
- ◆接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

◆绝缘体：尼龙66, UL94-0
Insulator: Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD. 公司地址: www.dgkonne.cn 公司电话: 0769-85337633 邮 箱: 2860175666@qq.com 公司传真: 0769-85362627	PART. NO: 3962-XX		
				LINEAR	ANGLES	APPROVED					DWG. NO:	
				0.0±0.25	X° REF±6°							
A0	新图面发行	2018.11.21	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER			TITLE: 3.96mm pitch Single Housing	REV: A0 SHEET: 1/1		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.21				

 **东莞市康导新能源科技有限公司**
DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD

公司网址: www.dgkonne.cn 公司电话: 0769-85337633
邮 箱: 2850175968@qq.com 公司传真: 0769-85362827

PART. NO: 3962-XX

DWG. NO:

REV: A0	SHEET: 1 / 1
---------	--------------