


环保物料

Pin数	尺寸A	尺寸B
2	3.96	8.02
3	7.92	11.98
4	11.88	15.94
5	15.84	19.90
6	19.80	23.86
7	23.76	27.82
8	27.72	31.78
9	31.68	35.74
10	35.64	39.70
11	39.60	43.66
12	43.56	47.62
13	47.52	51.58
14	51.48	55.54
15	55.44	59.50
16	59.40	63.46
17	63.36	67.42
18	67.32	71.38
19	71.28	75.34
20	75.24	79.30

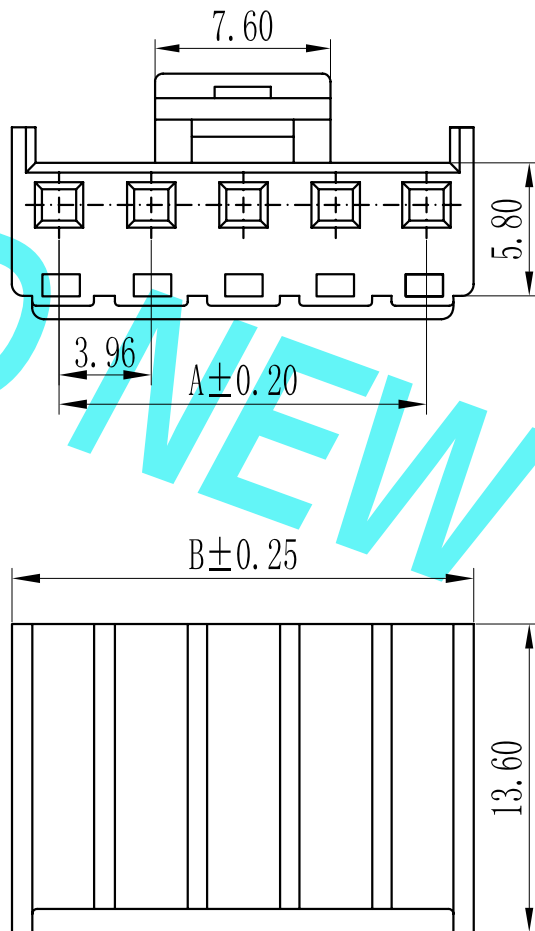

技术参数 SPECIFICATIONS

- ◆间距: 3.96 Pitch:3.96
- ◆适用线规: AWG#24-#18
Applicable Wire:AWG#24-#18
- ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC, DC, 250V(rms)
- ◆额定电流: 5A, AC, DC
Current rating:5A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Working Temp: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆绝缘电阻: $\geq 1000\text{M}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
- ◆接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

REV.	新图面发行	2018. 11. 21	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 9396S-XX
				LINEAR	ANGLES					
				0.0±0.25	X° REF±6°	APPROVED				
A0	新图面发行	2018. 11. 21	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER			TITLE:	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018. 11. 21	3.96mm pitch Single Housing	REV: A0 SHEET: 1/1