
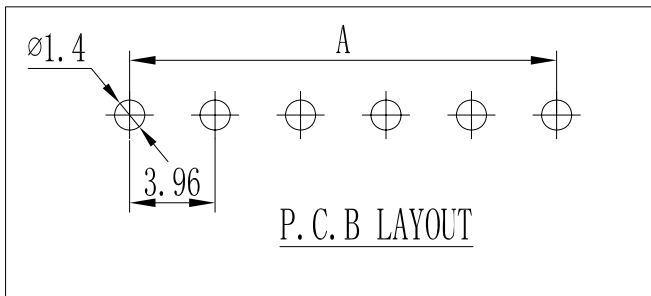
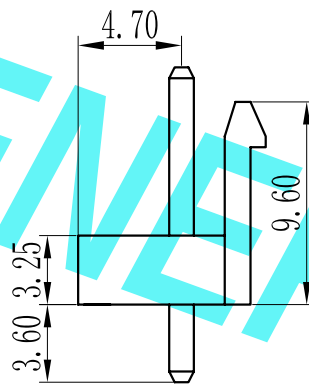
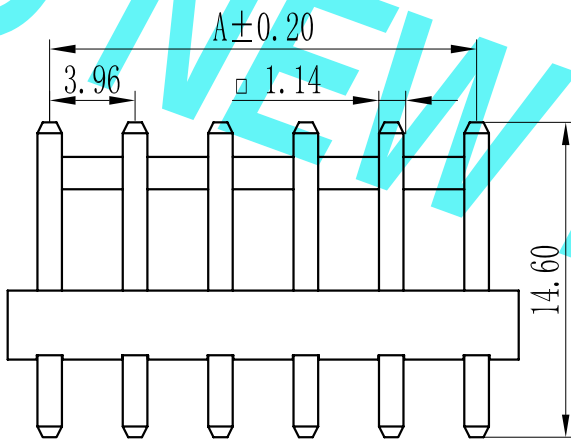


环保物料

Pin数	尺寸A	尺寸B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
19	71.28	75.24
20	75.24	79.20
21	79.20	83.16
22	83.16	87.12
23	87.12	91.08
24	91.08	95.04
25	95.04	99.00

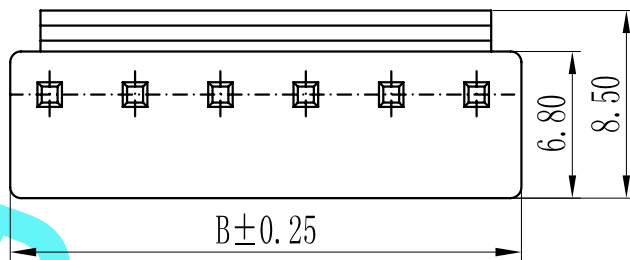

技术参数 SPECIFICATIONS

- ◆间距: 3.96 Pitch:3.96
- ◆适用线规: AWG#24-#18
Applicable Wire:AWG#24-#18
- ◆额定电压: AC, DC, 250V (有效值)
Voltage rating: AC, DC, 250V(rms)
- ◆额定电流: 5A, AC, DC
Current rating:5A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Working Temp: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆绝缘电阻: $\geq 1000\text{M}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
- ◆接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-2
Insulator:Nylon66 UL94-2
- ◆接触针: 磷青铜
Contact PIN: Phosphor Bronze

REV.	REVISION RECORD	DATE	SIZE: A4	GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE	PART. NO:
A0	新图面发行	2018. 11. 21	UNIT: MM	LINEAR 0.00±0.15	ANGLES $X^{\circ} \pm 3^{\circ}$	DESIGNER		9397-XX
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	$X^{\circ} X' \pm 2^{\circ}$	DRAWN	肖丽娟	DWG. NO:
								REV: A0
								SHEET: 1/1


东莞市康导新能源科技有限公司
 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD
 公司网址: www.dgoonne.cn 公司电话: 0769-85337533
 邮箱: 2850175986@qq.com 公司传真: 0769-85392827

TITLE:

3.96mm pitch Single Wafer