
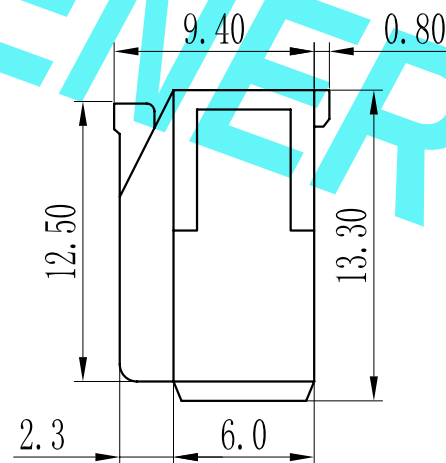


环保物料

Pin数	尺寸A	尺寸B
2	3.96	10.58
3	7.92	14.54
4	11.88	18.50
5	15.84	22.46
6	19.80	26.42
7	23.76	30.38
8	27.72	34.34
9	31.68	38.30
10	35.64	42.26
11	39.60	46.22
12	43.56	50.18
13	47.52	54.14
14	51.48	58.10
15	55.44	62.06
16	59.40	66.02
17	63.36	69.98
18	67.32	73.94
19	71.28	77.90
20	75.24	81.86

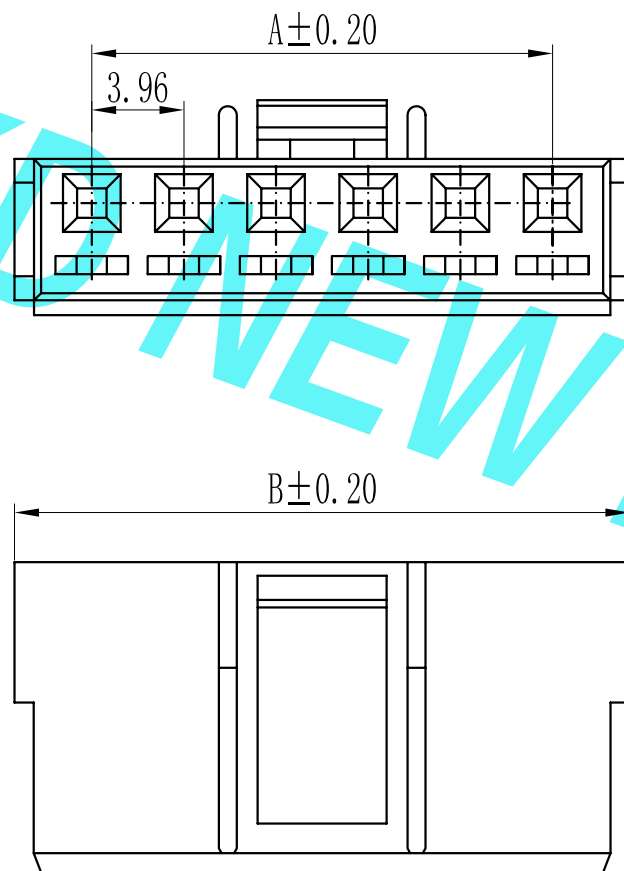

技术参数 SPECIFICATIONS

- ◆间距: 3.96 Pitch:3.96
- ◆适用线规: AWG#24-#18
Applicable Wire:AWG#24-#18
- ◆额定电压: AC, DC, 250V (有效值)
Voltage rating: AC, DC, 250V(rms)
- ◆额定电流: 5A, AC, DC
Current rating:5A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
- ◆接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0



GENERAL TOLERANCES

LINEAR ANGLES

0.0±0.25 X° REF±6°

0.00±0.15 X° ±3°

0.000±0.08 X° X'±2°

SCALE:
1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN

肖丽娟

2018. 11. 22



东莞市康号新能源科技有限公司

DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD

公司网址: www.dgkonne.cn

公司电话: 0769-85337533

邮箱: 2850175986@qq.com 公司传真: 0769-85392827

TITLE:

3.96mm pitch Single Housing

PART. NO:

3911-XX

DWG. NO:

REV: A0

SHEET: 1/1

A0

新图面发行

2018. 11. 22

UNIT: MM

SIZE: A4

0.000±0.08

X° X'±2°

DRAWN

肖丽娟

2018. 11. 22

TITLE:

3.96mm pitch Single Housing

PART. NO:

3911-XX

DWG. NO:

REV: A0

SHEET: 1/1