


环保物料

Pin数	尺寸A	尺寸B
2	3.96	10.58
3	7.92	14.54
4	11.88	18.50
5	15.84	22.46
6	19.80	26.42
7	23.76	30.38
8	27.72	34.34
9	31.68	38.30
10	35.64	42.26
11	39.60	46.22
12	43.56	50.18
13	47.52	54.14
14	51.48	58.10
15	55.44	62.06
16	59.40	66.02
17	63.36	69.98
18	67.32	73.84
19	71.28	77.90
20	75.24	81.86
21	79.20	85.82
22	83.16	89.78
23	87.12	93.74
24	91.08	97.70
25	95.04	101.66

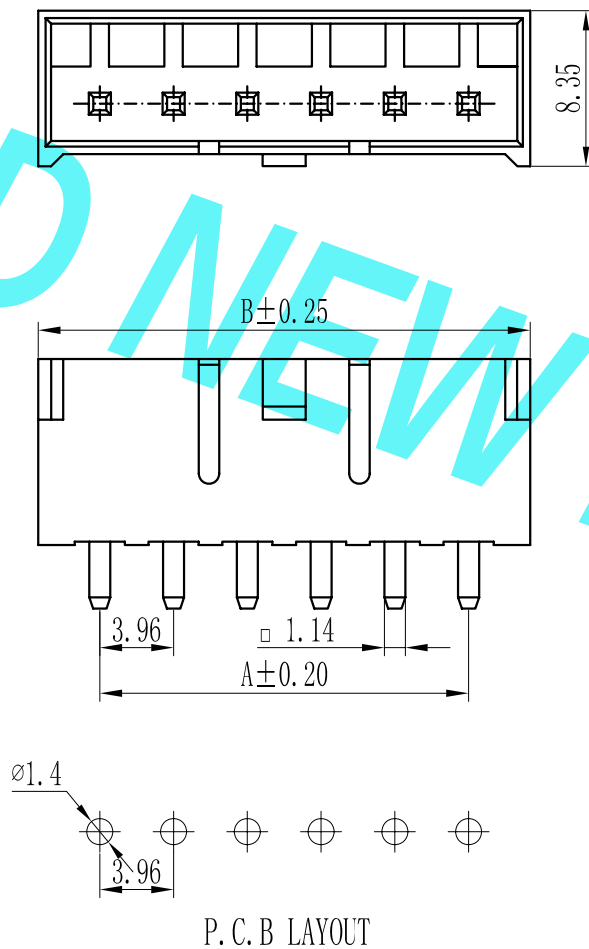

技术参数 SPECIFICATIONS

- ◆间距: 3.96 Pitch:3.96
- ◆适用线规: AWG#24-#18
Applicable Wire:AWG#24-#18
- ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC,DC, 250V(rms)
- ◆额定电流: 5A, AC, DC
Current rating:5A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
- ◆接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-2
Insulator:Nylon66 UL94-2
- ◆接触针: 磷青铜
Contact PIN: Phosphor Bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgkonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 3912-XX	
				LINEAR	ANGLES	APPROVED					
				0.0±0.25	X° REF±6°						
A0	新图面发行	2018.11.22	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				DWG. NO:	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.22		TITLE: 3.96mm pitch Single Wafer	
									REV: A0	SHEET: 1/1	