
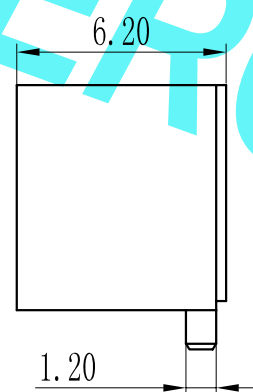
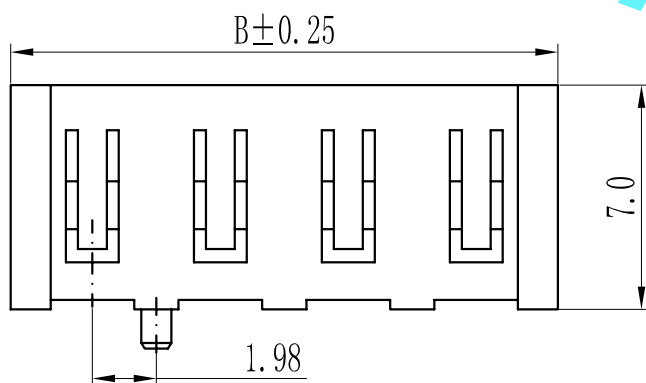


环保物料

Pin数	尺寸A	尺寸B
2	3.96	8.96
3	7.92	12.92
4	11.88	16.88
5	15.84	20.84
6	19.80	24.80
7	23.76	28.76
8	27.72	32.72
9	31.68	36.68
10	35.64	40.64
11	39.60	44.60
12	43.56	48.56
13	47.52	52.52
14	51.48	56.48
15	55.44	60.44
16	59.40	64.40
17	63.36	68.36
18	67.32	72.32
19	71.28	76.28
20	75.24	80.24

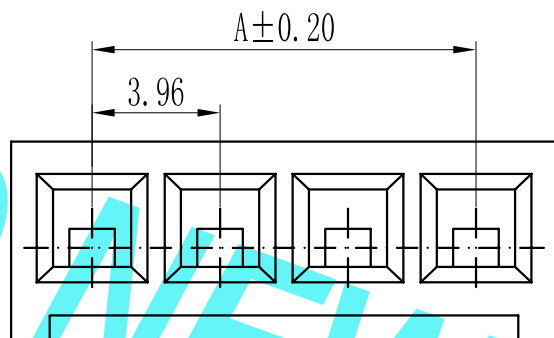

技术参数 SPECIFICATIONS

- ◆间距: 3.96 Pitch:3.96
- ◆适用线规: AWG#24-#18
Applicable Wire:AWG#24-#18
- ◆额定电压: AC, DC, 250V (有效值)
Voltage rating: AC, DC, 250V(rms)
- ◆额定电流: 5A, AC, DC
Current rating:5A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
- ◆接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 3951S-XX	
				LINEAR	ANGLES					DWG. NO:	
				0.0±0.25	X° REF±6°						
A0	新图面发行	2018.11.22		0.00±0.15	X° ±3°					TITLE: 3.96mm pitch Single Housing	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.22		REV: A0	SHEET: 1/1