


Pin数	尺寸A	尺寸B
2	4.00	10.00
3	8.00	14.00
4	12.00	18.00
5	16.00	22.00
6	20.00	26.00
7	24.00	30.00
8	28.00	34.00
9	32.00	38.00
10	36.00	42.00
11	40.00	46.00
12	44.00	50.00
13	48.00	54.00
14	52.00	58.00
15	56.00	62.00
16	60.00	66.00
17	64.00	70.00
18	68.00	74.00
19	72.00	78.00
20	76.00	82.00
21	80.00	86.00
22	84.00	90.00
23	88.00	94.00
24	92.00	98.00
25	96.00	102.00

Pin数	尺寸A	尺寸B
2	4.00	10.00
3	8.00	14.00
4	12.00	18.00
5	16.00	22.00
6	20.00	26.00
7	24.00	30.00
8	28.00	34.00
9	32.00	38.00
10	36.00	42.00
11	40.00	46.00
12	44.00	50.00
13	48.00	54.00
14	52.00	58.00
15	56.00	62.00
16	60.00	66.00
17	64.00	70.00
18	68.00	74.00
19	72.00	78.00
20	76.00	82.00
21	80.00	86.00
22	84.00	90.00
23	88.00	94.00
24	92.00	98.00
25	96.00	102.00

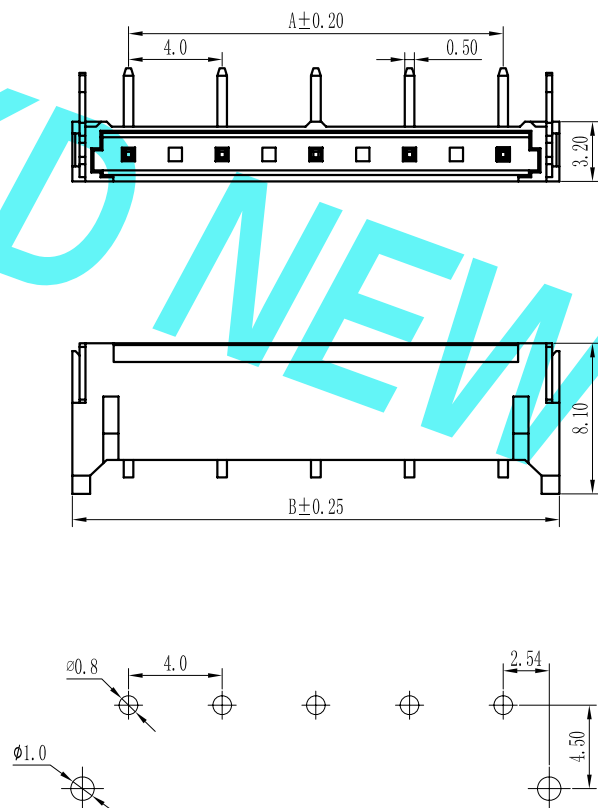

P. C. B LAYOUT

技术参数 SPECIFICATIONS

- ◆间距：4.0 Pitch:4.0
- ◆适用线规：AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压：AC, DC, 100V（有效值）
Voltage rating: AC, DC, 100V(rms)
- ◆额定电流：1.0A, AC, DC
Current rating:1.0A, AC, DC
- ◆耐压值：800V AC/minute
Withstand voltage:800V AC/minute
- ◆工作温度：-25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻：≥500MΩ
Insulation resistance:≥500MΩ
- ◆接触电阻：≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator: Nylon66 UL94-0
- ◆接触针: 磷青铜
Contact PIN: Phosphor Bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgoonns.cn 公司电话: 0769-85337633 邮 箱: 2860175866@qq.com 公司传真: 0769-85392827	PART. NO: 4003-XX	
				LINEAR	ANGLES	APPROVED				DWG. NO:	
				0.0±0.25	X° REF±6°						
A0	新图面发行	2018. 11. 22		UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				TITLE: 4.00mm pitch Single Wafer
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018. 11. 22			

东莞市康导新能源科技有限公司
DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD

公司网址: www.dgconne.cn 公司电话: 0769-85337633
 邮箱: 285017586@qq.com 公司传真: 0769-85362827

PART. NO: 4003-XX

DWG. NO:

REV: A0	SHEET: 1 / 1
---------	--------------