


环保物料

Pin数	尺寸A	尺寸B
2	4.00	6.50
3	8.00	10.50
4	12.00	14.50
5	16.00	18.50
6	20.00	22.50
7	24.00	26.50
8	28.00	30.50
9	32.00	34.50
10	36.00	38.50
11	40.00	42.50
12	44.00	46.50
13	48.00	50.50
14	52.00	54.50
15	56.00	58.50
16	60.00	62.50
17	64.00	66.50
18	68.00	70.50
19	72.00	74.50
20	76.00	78.50

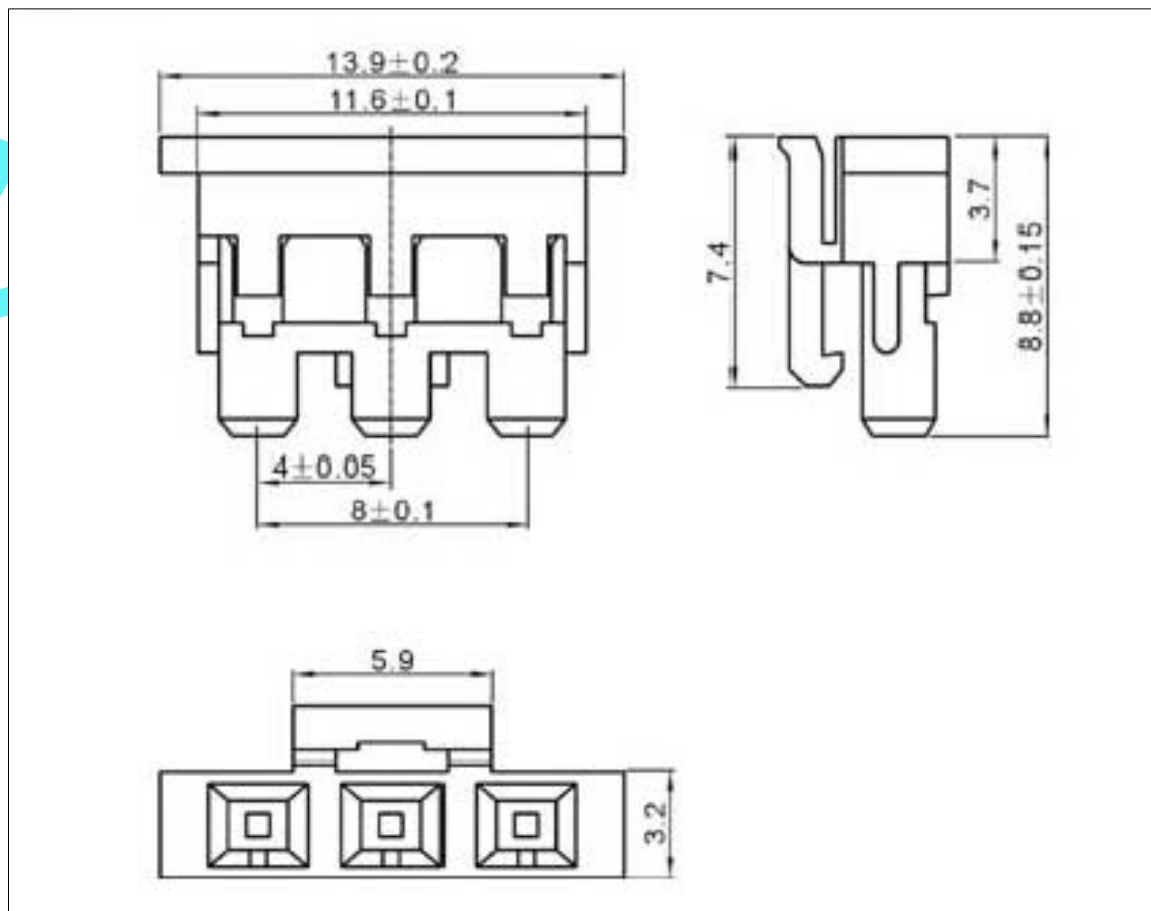

技术参数 SPECIFICATIONS

- ◆间距: 4.0 Pitch:4.0
- ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压: AC, DC, 100V (有效值)
Voltage rating: AC, DC, 100V(rms)
- ◆额定电流: 1A, AC, DC
Current rating:1A, AC, DC
- ◆耐压值: 800V AC/minute
Withstand voltage:800V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: $\geq 500M\Omega$
Insulation resistance: $\geq 500M\Omega$
- ◆接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD. 公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 4002S-XX	
				LINEAR	ANGLES	APPROVED				DWG. NO:	
				0.0±0.25	X° REF±6°						
A0	新图面发行	2018.11.22	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				TITLE: 4.00mm pitch Single Housing	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.22	REV: A0 SHEET: 1/1		