
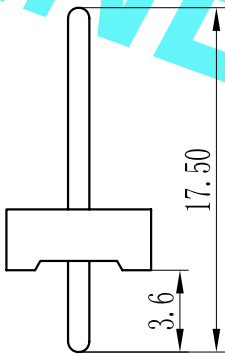
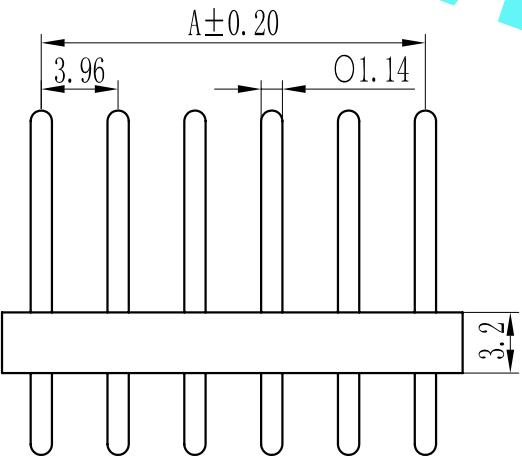
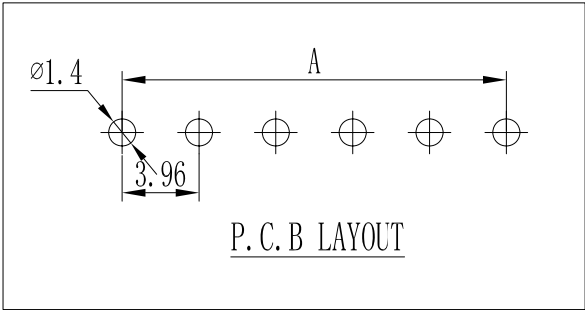


环保物料

Pin数	尺寸A	尺寸B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
19	71.28	75.24
20	75.24	79.20
21	79.20	83.16
22	83.16	87.12
23	87.12	91.08
24	91.08	95.04
25	95.04	99.00

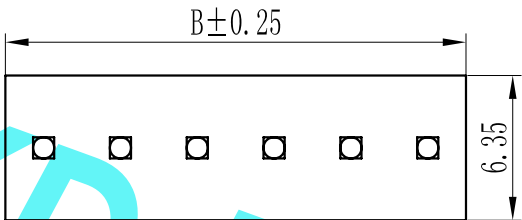

- 技术参数
 SPECIFICATIONS
- ◆间距: 3.96 Pitch:3.96
 - ◆适用线规: AWG#24-#18
Applicable Wire:AWG#24-#18
 - ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC,DC, 250V(rms)
 - ◆额定电流: 5A, AC, DC
Current rating:5A, AC, DC
 - ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
 - ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
 - ◆绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
 - ◆接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$
- 材料
 MATERIAL
- ◆绝缘体: 尼龙66, UL94-2
Insulator:Nylon66 UL94-2
 - ◆接触针: 磷青铜
Contact PIN: Phosphor Bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgkonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 3965R-XX	
				LINEAR	ANGLES	APPROVED				DWG. NO:	
				0.0±0.25	X° REF±6°	DESIGNER					
AO	新图面发行	2018.11.21	UNIT: MM	0.00±0.15	X° ±3°	TITLE:					
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.21		3.96mm pitch Single Wafer	
									REV: AO	SHEET: 1/1	