

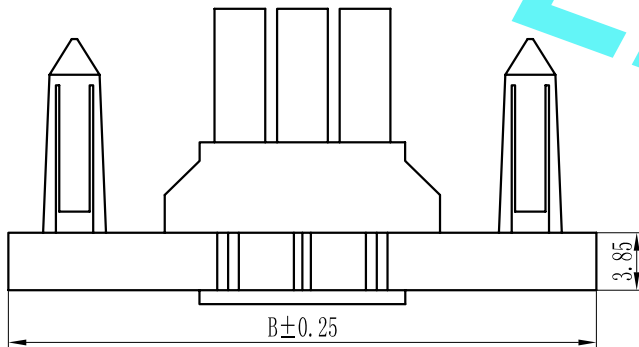


[illegible]

Pin数	尺寸A	尺寸B
2	4.20	40.20
3	8.40	44.40
4	12.60	48.60
5	16.80	52.80
6	21.00	57.00
7	25.20	61.20
8	29.40	65.40
9	33.60	69.60
10	37.80	73.80
11	42.00	78.00
12	46.20	82.20
13	50.40	86.40
14	54.60	90.60
15	58.80	94.80
16	63.00	99.00
17	67.20	103.20
18	71.40	107.40
19	75.60	111.60
20	79.80	115.80

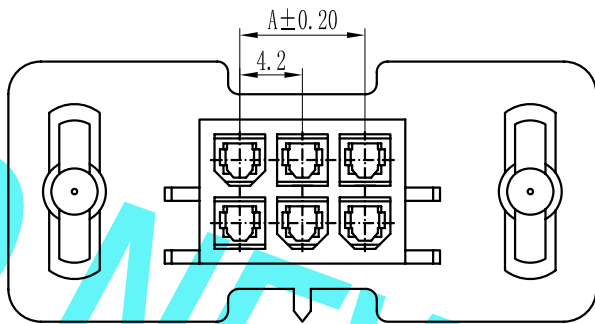

- ◆间距：4.2 Pitch:4.2
- ◆适用线规：AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压：AC, DC, 250V（有效值）
Voltage rating: AC, DC, 250V(rms)
- ◆额定电流：5A, AC, DC
Current rating:5A, AC, DC
- ◆耐压值：1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度：-25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻：≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻：≤20mΩ
Contact resistance:≤20mΩ

◆绝缘体：尼龙66, UL94-2
Insulator: Nylon66 UL94-2

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgconne.cn 公司电话: 0769-8537633 邮 箱: 2850175966@qq.com 公司传真: 0769-85392827	PART. NO: 9357WF-XX	
				LINEAR	ANGLES					APPROVED	
				0.0±0.25	X° REF±6°	DESIGNER				DWG. NO:	
A0	新图面发行	2018.11.23		UNIT: MM	0.00±0.15	X° ±3°					TITLE: 4.20mm pitch Dual Housing
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.23	REV: A0	SHEET: 1/1	