


环保物料

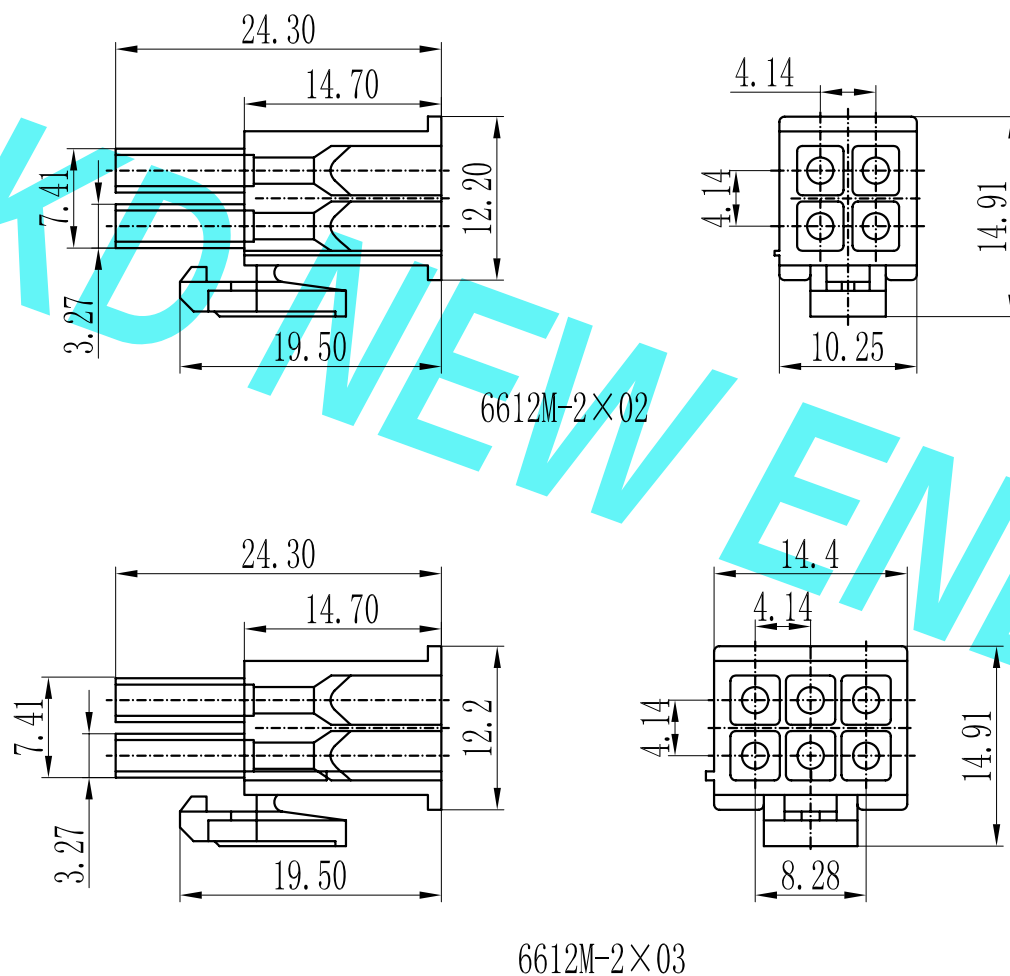

技术参数 SPECIFICATIONS

- ◆间距: 4.14 Pitch:4.14
- ◆额定电压: AC, DC, 300V (有效值)
Voltage rating: AC, DC, 300V(rms)
- ◆额定电流: 10-8.0A, AC, DC
Current rating:10-8.0A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
- ◆接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94V-0
Insulator:Nylon66 UL94V-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 6612M-2xXX	
				LINEAR	ANGLES					DWG. NO:	
A0	新图面发行	2018. 11. 23		0. 00±0. 25	X° REF±6°						
REV.	REVISION RECORD	DATE		0. 00±0. 15	X° ±3°						
			UNIT: MM	0. 00±0. 08	X° X'±2°					REV: A0 SHEET: 1/1	
			SIZE: A4								

TITLE: 4.14mm pitch Dual Housing