


环保物料

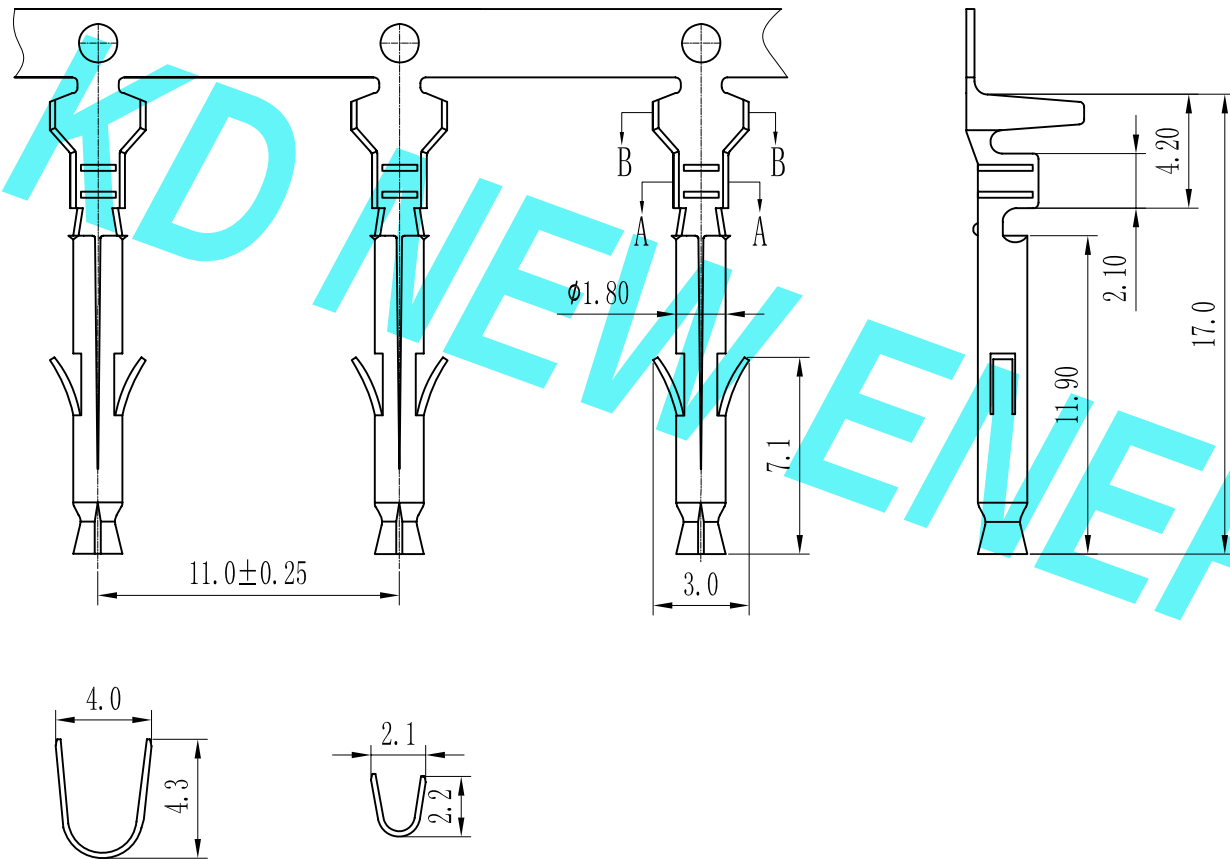

Section: A-A

Section: B-B

技术参数 SPECIFICATIONS

- ◆间距: 4.14 Pitch:4.14
- ◆额定电压: AC, DC, 250V (有效值)
Voltage rating: AC, DC, 250V (rms)
- ◆额定电流: 10-8.0A, AC, DC
Current rating: 10-8.0A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage: 1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp: -25℃~+85℃
- ◆绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
- ◆接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$

材料 MATERIAL

- ◆端子: 磷青铜
Terminal: Phosphor Bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD. 公司地址: www.dgkonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 6612M-T	
				LINEAR	ANGLES	APPROVED					DWG. NO:
				0.0±0.25	X° REF±6°						
A0	新图面发行	2018.11.23	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				TITLE:	4.14mm pitch Crimp Terminal
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.23	REV: A0 SHEET: 1/1		