
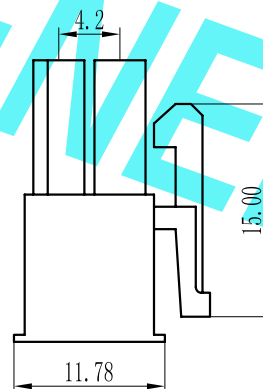
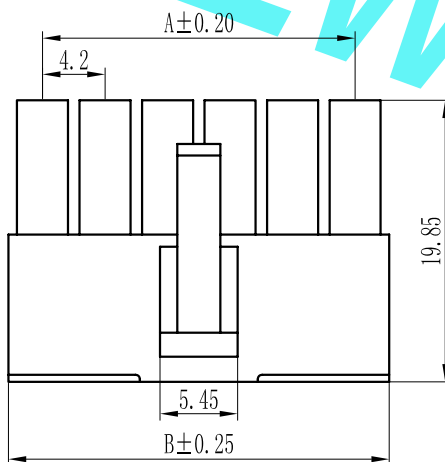


环保物料

Pin数	尺寸A	尺寸B
2	4.20	5.50
3	8.40	9.70
4	12.60	13.90
5	16.80	22.30
6	21.00	26.50
7	25.20	30.70
8	29.40	34.90
9	33.60	39.10
10	37.80	43.30
11	42.00	47.50
12	46.20	51.70
13	50.40	55.90
14	54.60	60.10
15	58.80	64.30
16	63.00	68.50
17	67.20	72.70
18	71.40	76.90
19	75.60	81.10
20	79.80	85.30
21	84.00	89.50
22	88.20	93.70
23	92.40	97.90
24	96.60	102.10
25	100.80	106.30

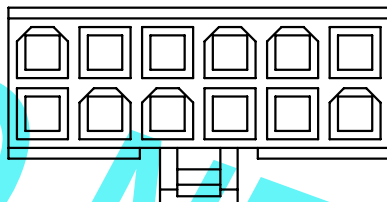

技术参数 SPECIFICATIONS

- ◆间距: 4.2 Pitch:4.2
- ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压: AC, DC, 250V (有效值)
Voltage rating: AC, DC, 250V(rms)
- ◆额定电流: 5A, AC, DC
Current rating:5A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-2
Insulator:Nylon66 UL94-2

REV.	新图面发行	2018. 11. 23	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	TITLE:	PART. NO:	DWG. NO:	REV:	SHEET:
				LINEAR	ANGLES								
A0	新图面发行	2018. 11. 23	UNIT: MM	0.00±0.15	X° ±3°	APPROVED			4.20mm pitch Dual Housing	9357-2×XX			
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018. 11. 23					

东莞市康导新能源科技有限公司
DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD
公司网址: www.dgoonne.cn 公司电话: 0769-85337533
邮箱: 2850175986@qq.com 公司传真: 0769-85392827

PART. NO: 9357-2×XX

DWG. NO:

REV: A0 SHEET: 1/1