
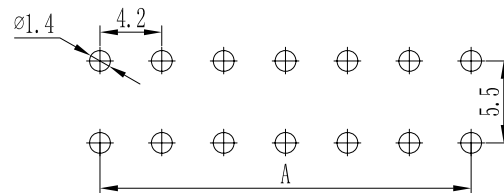
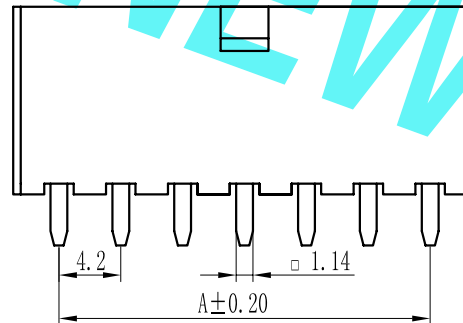


环保物料

Pin数	尺寸A	尺寸B
2	4.20	5.80
3	8.40	10.00
4	12.60	14.20
5	16.80	18.40
6	21.00	22.60
7	25.20	26.80
8	29.40	31.00
9	33.60	35.20
10	37.80	39.40
11	42.00	43.60
12	46.20	47.80
13	50.40	52.00
14	54.60	56.20
15	58.80	60.40
16	63.00	64.60
17	67.20	68.80
18	71.40	73.00
19	75.60	77.20
20	79.80	81.40
21	84.00	85.60
22	88.20	89.80
23	92.40	94.00
24	96.60	98.20
25	100.80	102.40

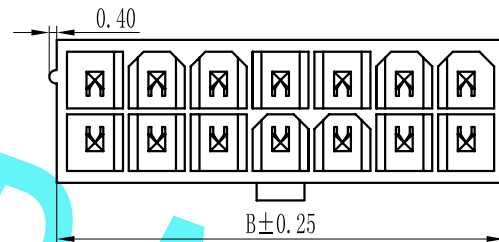

P. C. B LAYOUT

技术参数 SPECIFICATIONS

- ◆间距: 4.2 Pitch:4.2
- ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC, DC, 250V(rms)
- ◆额定电流: 5A, AC, DC
Current rating:5A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
- ◆接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-2
Insulator:Nylon66 UL94-2
- ◆接触针: 磷青铜
Contact PIN: Phosphor Bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 9359-2×XX
				LINEAR	ANGLES	APPROVED				DWG. NO:
				0.0±0.25	X° REF±6°	DESIGNER				REV: A0
A0	新图面发行	2018.11.23	UNIT: MM	0.00±0.15	X° ±3°	DRAWN	肖丽娟	2018.11.23		SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°				TITLE: 4.20mm pitch Dual Wafer	