


环保物料

Pin数	尺寸A	尺寸B
2	4.20	6.05
3	8.40	10.25
4	12.60	14.45
5	16.80	18.65
6	21.00	22.85
7	25.20	27.05
8	29.40	31.25
9	33.60	35.45
10	37.80	39.65
11	42.00	43.85
12	46.20	48.05
13	50.40	52.25
14	54.60	56.45
15	58.80	60.65
16	63.00	64.85
17	67.20	69.05
18	71.40	73.25
19	75.60	77.45
20	79.80	81.65
21	84.00	85.85
22	88.20	90.05
23	92.40	94.25
24	96.60	98.45
25	100.80	102.65

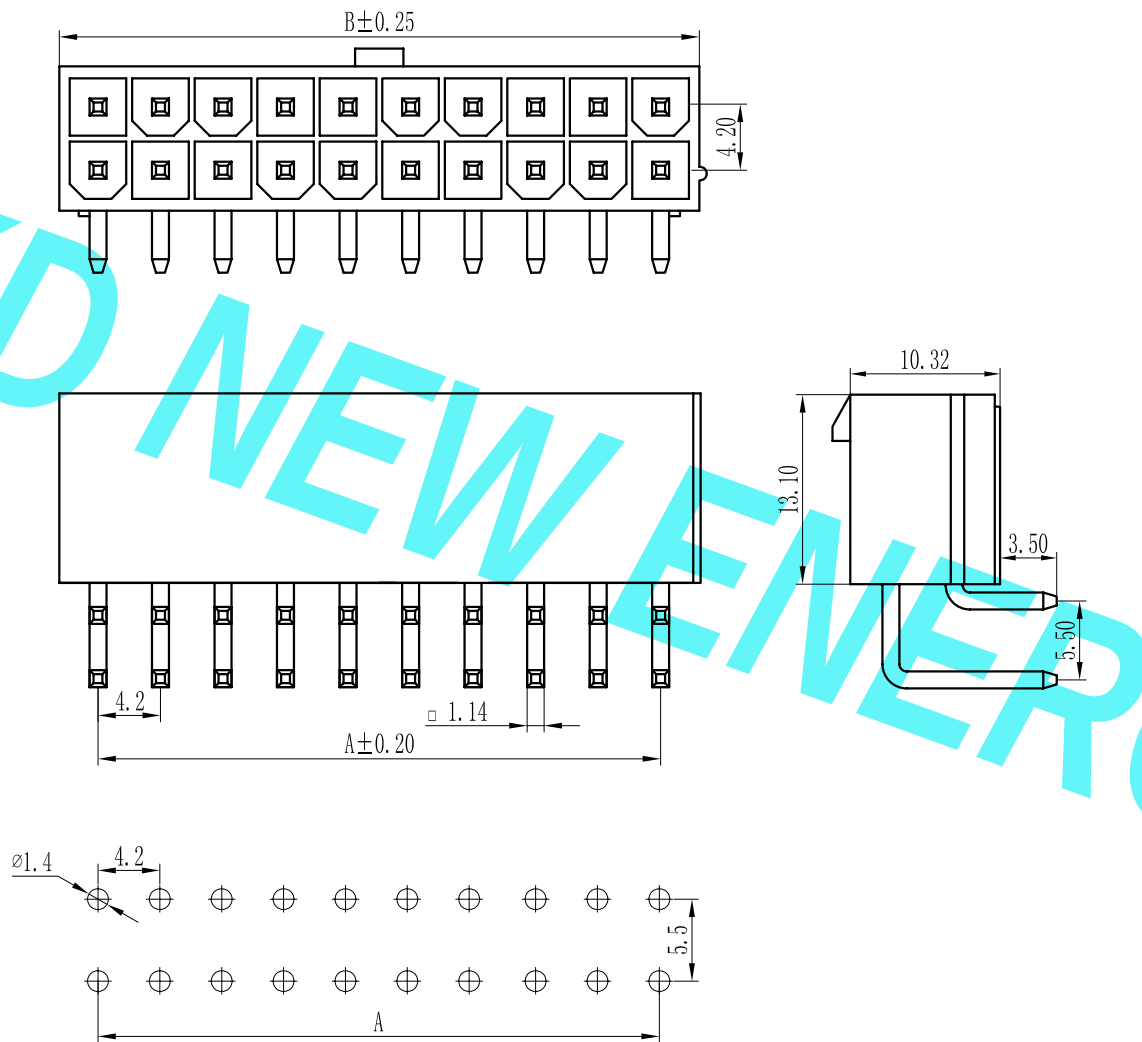

P. C. B LAYOUT

技术参数 SPECIFICATIONS

- ◆间距: 4.2 Pitch:4.2
- ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压: AC,DC,250V (有效值)
Voltage rating: AC,DC,250V(rms)
- ◆额定电流: 5A,AC,DC
Current rating:5A,AC,DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66,UL94-2
Insulator:Nylon66 UL94-2
- ◆接触针:磷青铜
Contact PIN: Phosphor Bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮 箱: 2850175988@qq.com 公司传真: 0769-85392827	PART. NO: 9360P-2×XX		
				LINEAR	ANGLES	APPROVED					DWG. NO:	
				0.0±0.25	X° REF±6°	DESIGNER						
A0	新图面发行	2018.11.26	UNIT: MM	0.00±0.15	X° ±3°					TITLE: 4.20mm pitch Dual Wafer	REV: A0 SHEET: 1/1	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.26				

4.20mm pitch Dual Wafer