


环保物料

Pin数	尺寸A	尺寸B
2	4.20	5.50
3	8.40	9.70
4	12.60	13.90
5	16.80	22.30
6	21.00	26.50
7	25.20	30.70
8	29.40	34.90
9	33.60	39.10
10	37.80	43.30
11	42.00	47.50
12	46.20	51.70
13	50.40	55.90
14	54.60	60.10
15	58.80	64.30
16	63.00	68.50
17	67.20	72.70
18	71.40	76.90
19	75.60	81.10
20	79.80	85.30
21	84.00	89.50
22	88.20	93.70
23	92.40	97.90
24	96.60	102.10
25	100.80	106.30

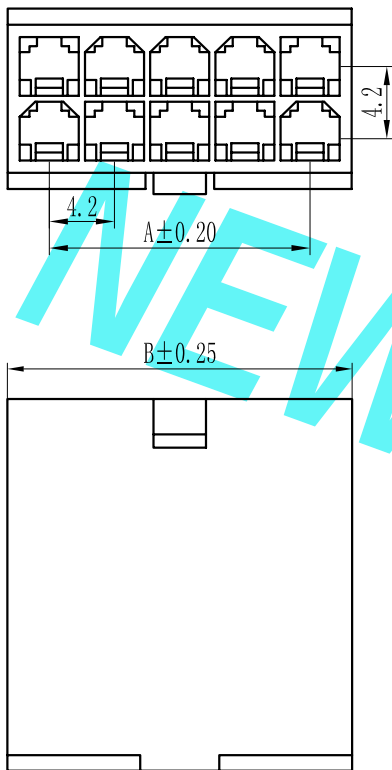

- 技术参数
 SPECIFICATIONS
- ◆间距：4.2 Pitch:4.2
 - ◆适用线规：AWG#22-#28
Applicable Wire:AWG#22-#28
 - ◆额定电压：AC,DC, 250V（有效值）
Voltage rating: AC, DC, 250V(rms)
 - ◆额定电流：5A, AC, DC
Current rating:5A, AC, DC
 - ◆耐压值：1500V AC/minute
Withstand voltage:1500V AC/minute
 - ◆工作温度：-25℃~+85℃
Working Temp:-25℃~+85℃
 - ◆绝缘电阻：≥1000MΩ
Insulation resistance:≥1000MΩ
 - ◆接触电阻：≤20mΩ
Contact resistance:≤20mΩ

- 材料
 MATERIAL
- ◆绝缘体：尼龙66, UL94-2
Insulator:Nylon66 UL94-2

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 9358-2×XX	
				LINEAR	ANGLES					APPROVED	
				0.0±0.25	X° REF±6°	DESIGNER					
A0	新图面发行	2018.11.26		UNIT: MM	0.00±0.15	X° ±3°	DRAWN	肖丽娟		2018.11.26	TITLE: 4.20mm pitch Dual Housing
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°					REV: A0	SHEET: 1/1