
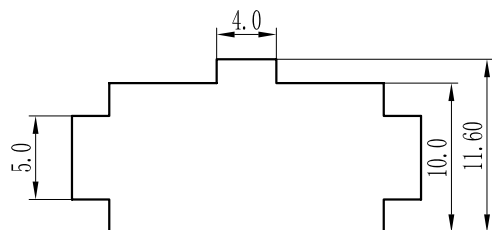
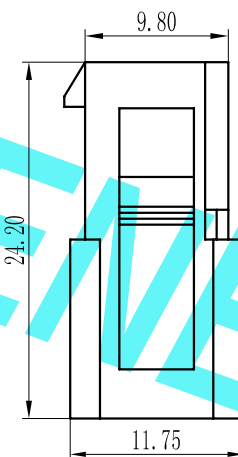
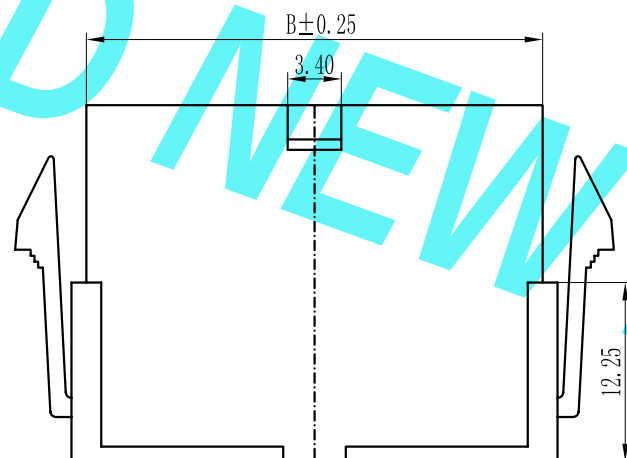


Pin数	尺寸A	尺寸B
2	4.20	9.60
3	8.40	13.80
4	12.60	18.00
5	16.80	22.20
6	21.00	26.40
7	25.20	30.60
8	29.40	34.80
9	33.60	39.00
10	37.80	43.20
11	42.00	47.40
12	46.20	51.60
13	50.40	55.80
14	54.60	60.00
15	58.80	64.20
16	63.00	68.40
17	67.20	72.60
18	71.40	76.82
19	75.60	81.00
20	79.80	85.20
21	84.00	89.40
22	88.20	93.60
23	92.40	97.80
24	96.60	102.00
25	100.80	106.20

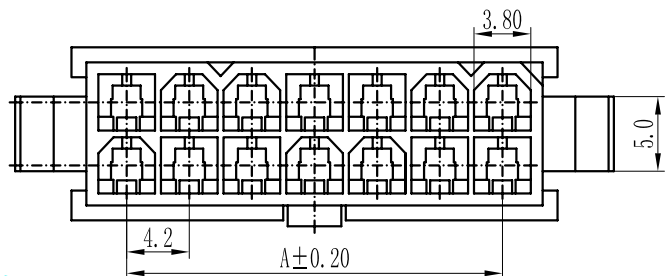

P. C. B LAYOUT

- ◆间距: 4.2 Pitch:4.2
- ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压: AC, DC, 250V (有效值)
Voltage rating: AC, DC, 250V(rms)
- ◆额定电流: 5A, AC, DC
Current rating:5A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
Working Temp: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- ◆绝缘电阻: $\geq 1000\text{M}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
- ◆接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

◆绝缘体：尼龙66, UL94-2
Insulator: Nylon66 UL94-2

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2860175666@qq.com 公司传真: 0769-85392827	PART. NO: 9358E-2×XX	
				LINEAR	ANGLES	APPROVED				DWG. NO:	
				0.0±0.25	X° REF±6°						
A0	新图面发行	2018. 11. 26	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				TITLE: 4.20mm pitch Dual Housing	REV: A0
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018. 11. 26			