


环保物料

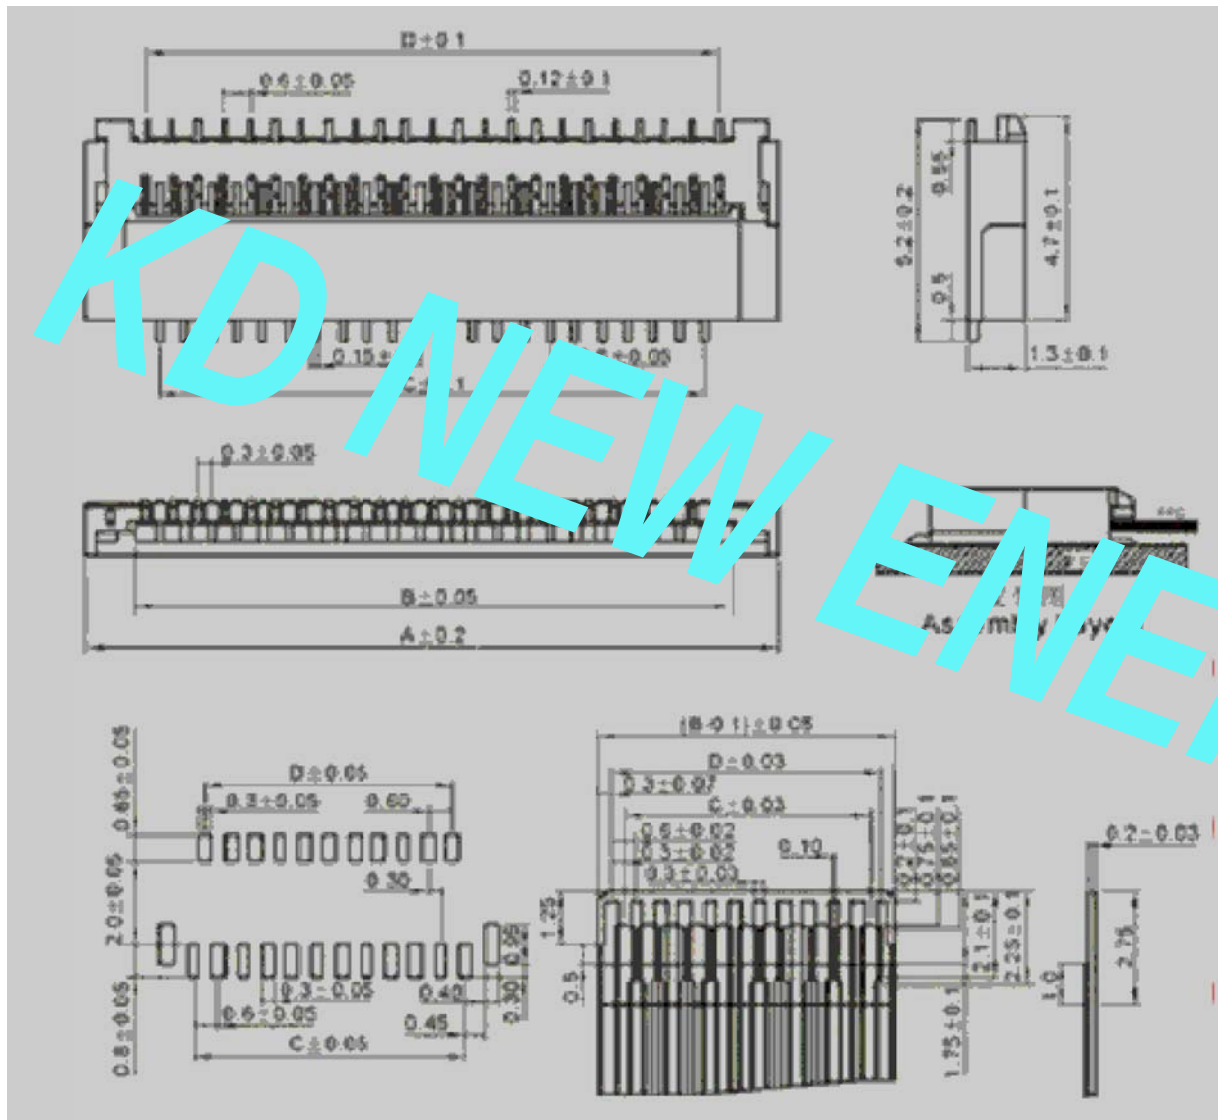

技术参数SPECIFICATIONS

极数: 15~71
Poles:15~71
额定电压: AC,DC, 30V (50HZ有效值)
Voltage rating:AC,DC, 30V (50HZ有效值)
额定电流: 0.3A, AC, DC
Current rating:0.3A, AC, DC
耐压值: 100V AC/minute
Withstang voltage:100V AC/minute
工作温度: -10℃~+50℃
Working Temperature:-10℃~+50℃
绝缘电阻: ≥500MΩ
Insulation resistance:≥500MΩ
接触电阻: ≤0.1Ω
Contact resistance: ≤0.1Ω
单面接触
Single Contact

接触件TERMINAL


材质: 磷青铜
Material:Phosphor Bronze

塑胶主体HOUSING

材质: 尼龙46, UL 94V-0
Material:Thermoplastic: 尼龙46, UL 94V-0

包装方式PACKAGE

Reel Package



孔距 Pitch	A	B	C	D
15	6.1	4.90	3.60	4.20
17	6.70	5.40	4.20	5.40
21	7.90	6.60	5.40	6.60
23	8.50	7.20	6.00	6.60
25	9.10	7.80	6.60	7.20
27	9.70	8.40	7.20	8.40
31	10.90	9.60	8.40	9.60
33	11.50	10.20	9.00	10.20
37	12.70	11.40	10.20	10.80
39	13.30	12.00	10.80	

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgkonne.cn 公司电话: 0768-85337633 邮 箱: 2850175988@qq.com 公司传真: 0768-85392827	PART. NO: 0.3mm Pitch FPC Conn. E/0(H:1.3)		
				LINEAR	ANGLES	APPROVED						DWG. NO: KDFPC-0004
				0.0±0.25	X° REF±6°	DESIGNER						
AO	新图面发行	2018.11.26	UNIT: MM	0.00±0.15	X° ±3°					TITLE: 0.3mm pitch Dual Wafer		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.26		REV:	AO	SHEET: 1/1