


环保物料

Pin数	尺寸A	尺寸B	尺寸C
4	3.75	6.75	10.05
5	5.00	8.00	11.30
6	6.25	9.25	12.55
7	7.50	10.50	13.80
8	8.75	11.75	15.05
9	10.00	13.00	16.30
10	11.25	14.25	17.55
11	12.50	15.50	18.80
12	13.75	16.75	20.05
13	15.00	18.00	21.30
14	16.25	19.25	22.55
15	17.50	20.50	23.80
16	18.75	21.75	25.05
17	20.00	23.00	26.30
18	21.25	24.25	27.55
19	22.50	25.55	28.80
20	23.75	26.75	30.05
21	25.00	28.00	31.30
22	26.25	29.27	32.55
23	27.50	30.52	33.80
24	28.75	31.77	35.05
25	30.00	33.02	36.30
26	31.25	34.27	37.55
27	32.50	35.52	38.80

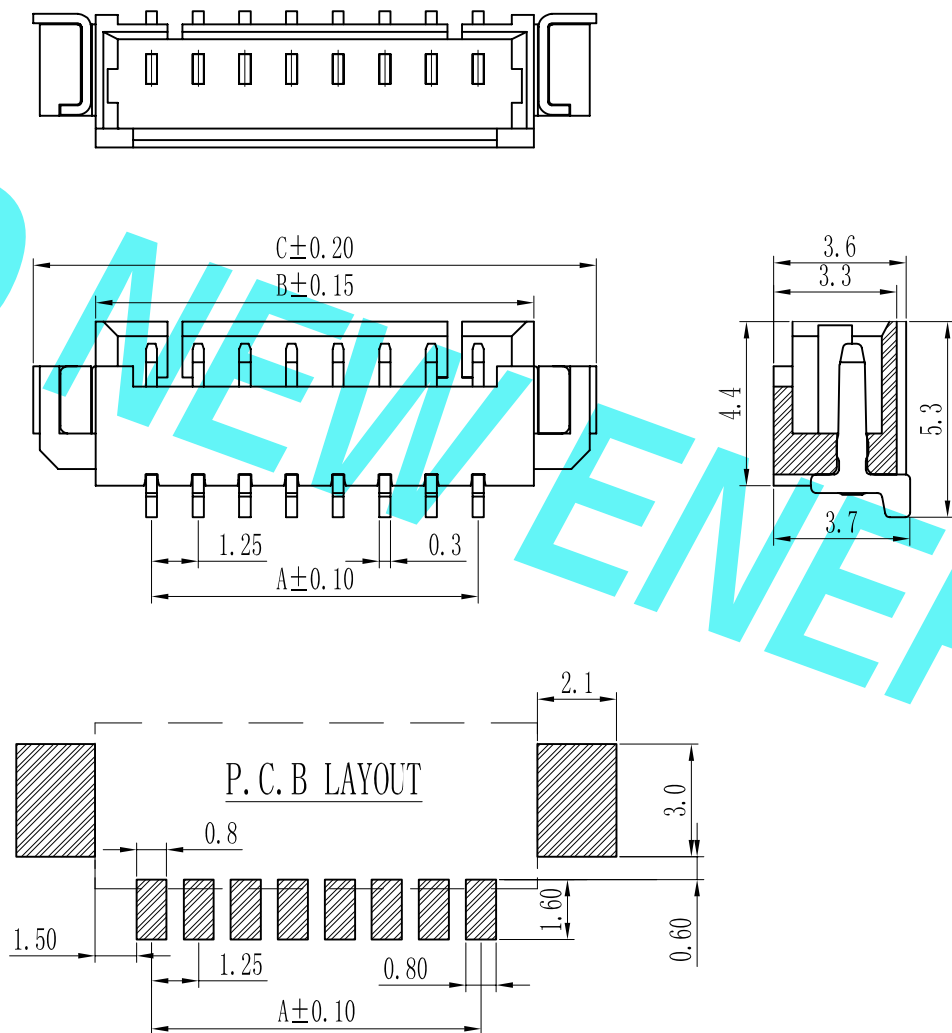

技术参数 SPECIFICATIONS

- ◆间距: 1.25 Pitch:1.25
- ◆极数: 2~16 Poles:2~16
- ◆适用线规: AWG#28-#32
Applicable Wire:AWG#28-#32
- ◆额定电压: AC, DC, 125V (有效值)
Voltage rating: AC, DC, 125V(rms)
- ◆额定电流: 0.5A, AC, DC (AWG#28)
Current rating:0.5A, AC, DC (AWG#28)
- ◆耐压值: 250V AC/minute
Withstand voltage:250V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

接触件 (TERMINAL)

- ◆材质: 磷铜
Material:Phosphor Bronze

塑胶本体 (HOUSING)

- ◆材质: 尼龙46 (Nylon46), UL94-V0

包装方式 (PACKAGE)

- ◆管装 Pipe Package
- ◆卷装 Winding Package
- ◆编带包装 Reel Package

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgkonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 1.25T-1-WT-NA
				LINEAR	ANGLES	APPROVED				DWG. NO:
A0	新图面发行	2018.11.27	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.27		REV: A0 SHEET: 1/1

TITLE:
1.25mm pitch Single Wafer