

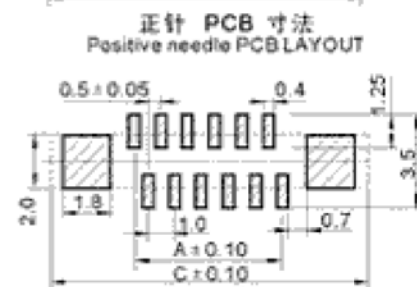
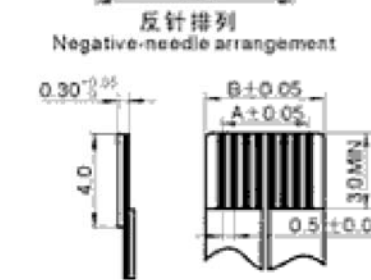
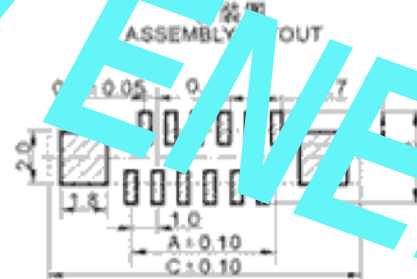
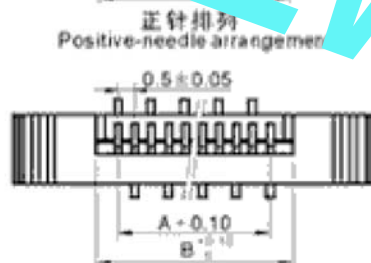




水坑 Poles	A	B	C
4	1.50	2.60	7.50
5	2.00	3.10	8.00
6	2.50	3.60	8.50
7	3.00	4.10	9.00
8	3.50	4.60	9.50
9	4.00	5.10	10.00
10	4.50	5.60	10.50
11	5.00	6.10	11.00
12	5.50	6.60	11.50
13	6.00	7.10	12.00
14	6.50	7.60	12.50
15	7.00	8.10	13.00
16	7.50	8.60	13.50
17	8.00	9.10	14.00
18	8.50	9.60	14.50
19	9.00	10.10	15.00
20	9.50	10.60	15.50
21	10.00	11.10	16.00
22	10.50	11.60	16.50
23	11.00	12.10	17.00
24	11.50	12.60	17.50
25	12.00	13.10	18.00
26	12.50	13.60	18.50
27	13.00	14.10	19.00
28	13.50	14.60	19.50
29	14.00	15.10	20.00
30	14.50	15.60	20.50
31	15.00	16.10	21.00
32	15.50	16.60	21.50
33	16.00	17.10	22.00
34	16.50	17.60	22.50
35	17.00	18.10	23.00
36	17.50	18.60	23.50
37	18.00	19.10	24.00
38	18.50	19.60	24.50
39	19.00	20.10	25.00
40	19.50	20.60	25.50

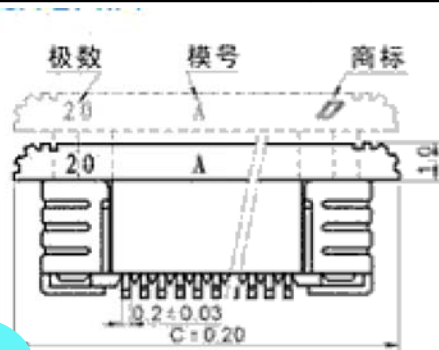

技术参数SPECIFICATIONS	A
极数: 4~50	
Poles:4~50	
额定电压: AC, DC, 200V (50HZ有效值)	
Voltage rating:AC, DC, 200V (50HZ有效值)	
额定电流: 0. 4A, AC, DC	B
Current rating:0. 4A, AC, DC	
耐压值: 250V AC/minute	
Withstang voltage:250V AC/minute	
工作温度: -20℃~+85℃	
Working Temperature:-20℃~+85℃	C
绝缘电阻: ≥500MΩ	
Insulation resistance:≥500MΩ	
接触电阻: ≤0. 02Ω	
Contact resistance: ≤0. 02Ω	D
单面接触	
Single Contact	

接触件TERMINAL	
材质: 磷青铜	
Material:Phosphor Bronze	
塑料主体HOUSING	
材质: 尼龙46, UL 94V-0	
Material:Thermopiastic: 尼龙46, UL 94V-0	
包装方式PACKAGE	

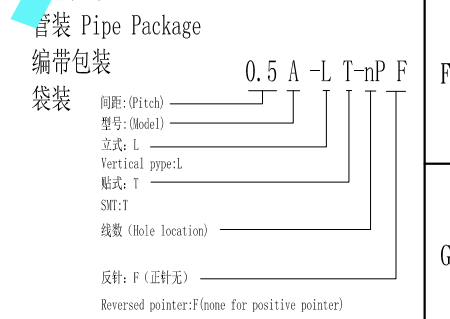

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgkonne.cn 公司电话: 0769-85337633 电 邮: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: FPC 0.5A-LT	
				LINEAR	ANGLES	APPROVED				DWG. NO: KDFPC-0005	
				0.0±0.25	X° REF±6°						
AO	新图面发行	2018.11.26		UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				TITLE: 0.5mm pitch Dual Wafer
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.26			

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---