


环保物料

孔位 Poles	A	B	C
4	1.50	2.60	7.50
5	2.00	3.10	8.00
6	2.50	3.60	8.50
7	3.00	4.10	9.00
8	3.50	4.60	9.50
9	4.00	5.10	10.00
10	4.50	5.60	10.50
11	5.00	6.10	11.00
12	5.50	6.60	11.50
13	6.00	7.10	12.00
14	6.50	7.60	12.50
15	7.00	8.10	13.00
16	7.50	8.60	13.50
17	8.00	9.10	14.00
18	8.50	9.60	14.50
19	9.00	10.10	15.00
20	9.50	10.60	15.50
21	10.00	11.10	16.00
22	10.50	11.60	16.50
23	11.00	12.10	17.00
24	11.50	12.60	17.50
25	12.00	13.10	18.00
26	12.50	13.60	18.50
27	13.00	14.10	19.00
28	13.50	14.60	19.50
29	14.00	15.10	20.00
30	14.50	15.60	20.50
31	15.00	16.10	21.00
32	15.50	16.60	21.50
33	16.00	17.10	22.00
34	16.50	17.60	22.50
35	17.00	18.10	23.00
36	17.50	18.60	23.50
37	18.00	19.10	24.00
38	18.50	19.60	24.50
39	19.00	20.10	25.00
40	19.50	20.60	25.50

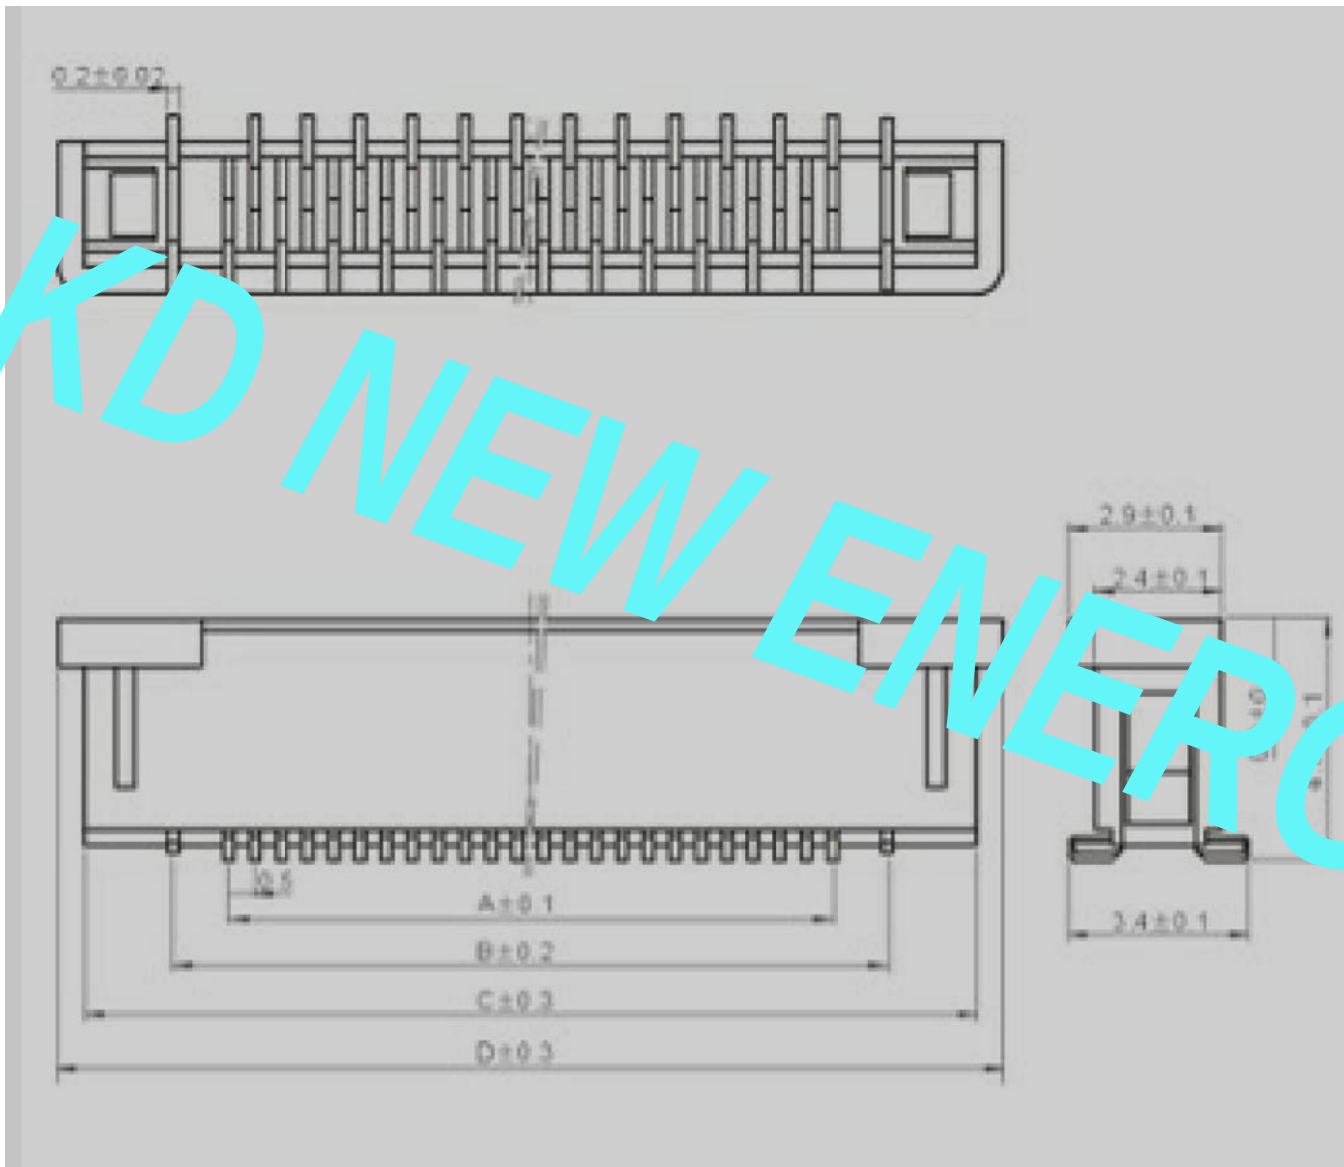

技术参数SPECIFICATIONS

极数: 4~50

Poles:4~50

额定电压: AC, DC, 200V (50HZ有效值)

Voltage rating:AC, DC, 200V (50HZ有效值)

额定电流: 0. 4A, AC, DC

Current rating:0. 4A, AC, DC

耐压值: 250V AC/minute

Withstang voltage:250V AC/minute

工作温度: -20℃~+85℃

Working Temperature:-20℃~+85℃

绝缘电阻: ≥500MΩ

Insulation resistance:≥500MΩ

接触电阻: ≤0. 02Ω

Contact resistance: ≤0. 02Ω

单面接触

Single Contact

接触件TERMINAL

材质: 磷青铜

Material:Phosphor Bronze

胶主件HOUSING

材质: 尼龙46, UL 94V-0


Material: Nylon46, UL 94V-0

包装方式PACKAGE

管装 Pipe Package

编带包装 Pipe Package

袋装 Bag Package



REV.	新图面发行	2018. 11. 26	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0. 0±0. 25	X° REF±6°	APPROVED		
A0				0. 00±0. 15	X° ±3°	DESIGNER		
				0. 000±0. 08	X° X'±2°	DRAWN	肖丽娟	2018. 11. 26

东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827		PART. NO: FPC 0. 5B1
TITLE: 0. 5mm pitch Dual Wafer		DWG. NO: KDFPC-0007
REV: A0	SHEET: 1/1	