
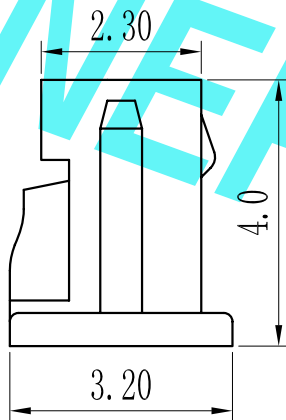
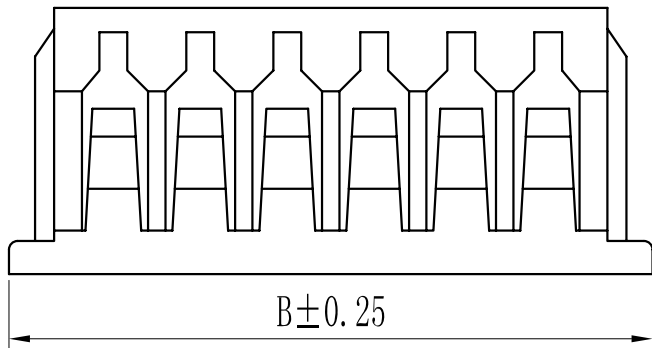


环保物料

Pin数	尺寸A	尺寸B
2	1.25	4.25
3	2.50	5.50
4	3.75	6.75
5	5.00	8.00
6	6.25	9.25
7	7.50	10.55
8	8.75	11.75
9	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	15.55
13	15.00	16.75
14	16.25	18.00
15	17.50	19.25
16	18.75	20.50
17	20.00	21.75
18	21.25	23.00
19	22.50	24.25
20	23.75	25.50
21	25.00	26.75
22	26.25	28.00
23	27.50	29.25
24	28.75	30.50
25	30.00	31.75

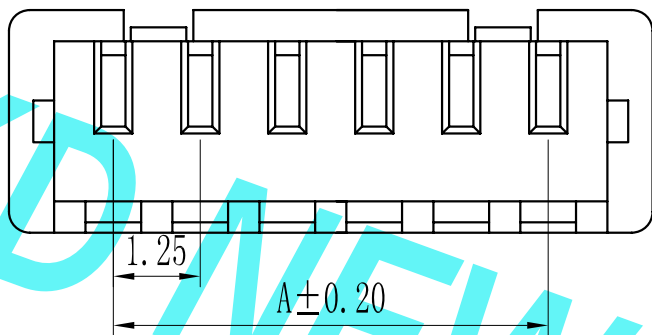

- 技术参数 SPECIFICATIONS

 - ◆适用线规: AWG#28~#32
Applicable Wire: AWG#28~#32
 - ◆额定电压: 125V DC, AC(rms)
Rated voltage: 125V DC, AC(rms)
 - ◆额定电流: 1A(AWG #28)
Rated Current: 1A(AWG #28)
 - ◆耐压值: 250V AC/minute
Withstand voltage: 250V AC/min
 - ◆工作温度 : -25℃~+85℃
Working Temp:-25℃~+85℃
 - ◆绝缘电阻 : 100MΩ Min
Insulation resistance:≥100MΩ
 - ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ
- 材料 MATERIAL

 - ◆塑胶: 尼龙66 (Nylon66), UL94-V0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 1.25T-1-NA	
				LINEAR	ANGLES					APPROVED	
				0.0±0.25	X° REF±6°	DESIGNER					
A0	新图面发行	2018.11.27	UNIT: MM	0.00±0.15	X° ±3°					TITLE: 1.25mm pitch Single Housing	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.27		REV: A0	SHEET: 1/1