
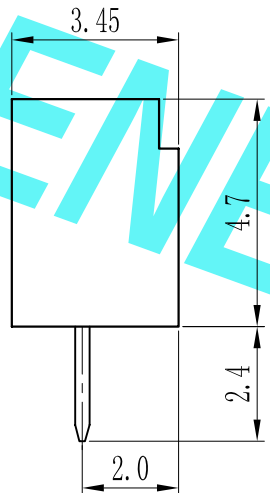
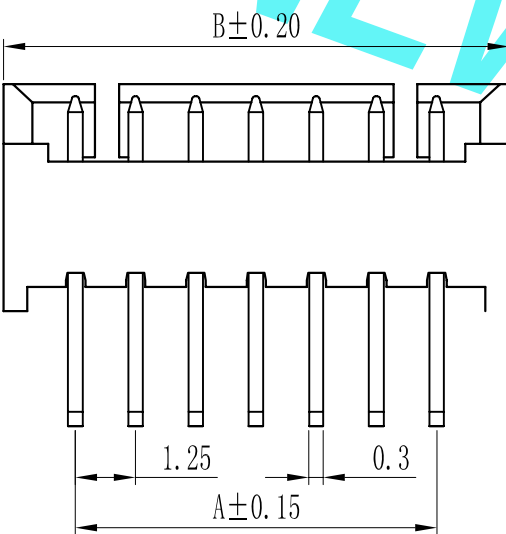
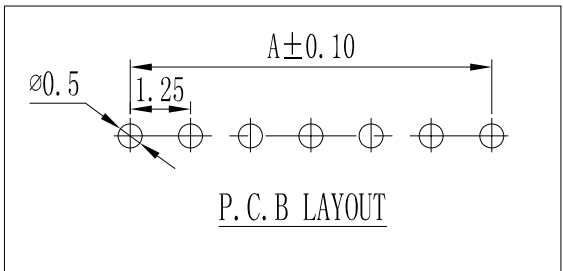


环保物料

Pin数	尺寸A	尺寸B
4	3.75	6.75
5	5.00	8.00
6	6.25	9.25
7	7.50	10.50
8	8.75	11.75
9	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50
16	18.75	21.75
17	20.00	23.00
18	21.25	24.25
19	22.50	25.55
20	23.75	26.75
21	25.00	28.00
22	26.25	29.27
23	27.50	30.52
24	28.75	31.77
25	30.00	33.02
26	31.25	34.27
27	32.50	35.52

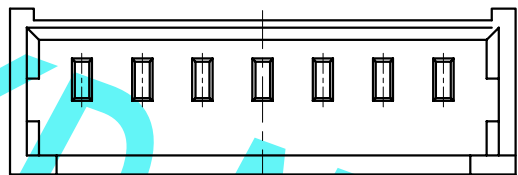

- 技术参数 SPECIFICATIONS
- ◆适用线规: AWG#28-#32
Applicable Wire:AWG#28-#32
 - ◆额定电压: AC, DC, 125V (有效值)
Voltage rating: AC, DC, 125V(rms)
 - ◆额定电流: 1.0A, AC, DC
Current rating:1.0A, AC, DC
 - ◆耐压值: 250V AC/minute
Withstand voltage:250V AC/minute
 - ◆工作温度: -40℃~+85℃
Working Temp:-40℃~+85℃
 - ◆绝缘电阻: ≥100MΩ
Insulation resistance:≥100MΩ
 - ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ
- 材料 MATERIAL
- ◆绝缘体: 尼龙6T, UL94-V0
Insulator:Nylon46, UL94-V0
 - ◆接触针: 磷铜
Cobtact PIN:Phosphor bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 1.25T-1-NA		
				LINEAR	ANGLES	APPROVED				DWG. NO:		
				0.0±0.25	X° REF±6°							
AO	新图面发行	2018.11.27	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				TITLE: 1.25mm pitch Single Wafer	REV: AO	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.27			SHEET: 1/1	