
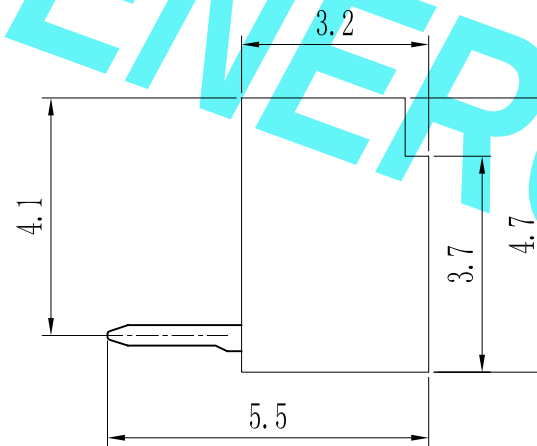
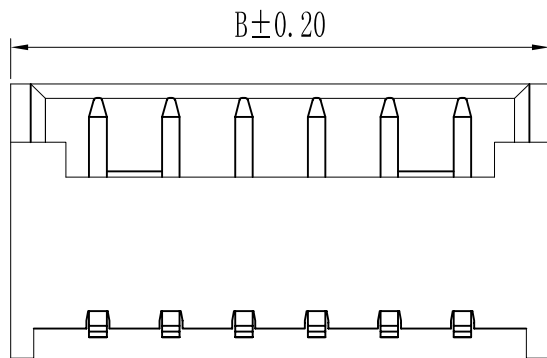
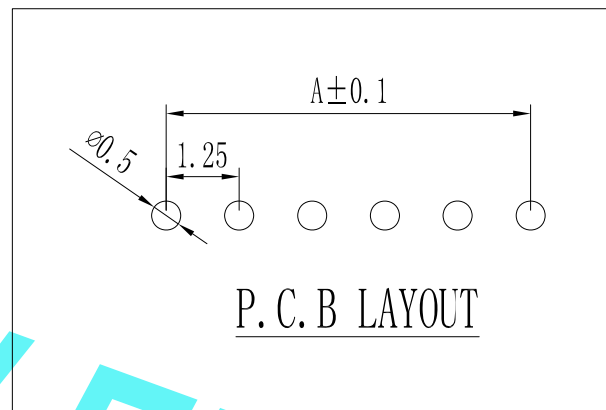


环保物料

Pin数	尺寸A	尺寸B
4	3.75	6.75
5	5.00	8.00
6	6.25	9.25
7	7.50	10.50
8	8.75	11.75
9	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50
16	18.75	21.75
17	20.00	23.00
18	21.25	24.25
19	22.50	25.55
20	23.75	26.75
21	25.00	28.00
22	26.25	29.27
23	27.50	30.52
24	28.75	31.77
25	30.00	33.02
26	31.25	34.27
27	32.50	35.52

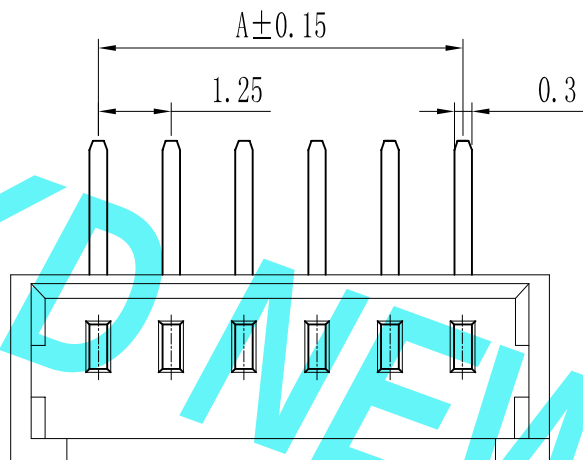

技术参数 SPECIFICATIONS

- ◆极数: 2~16 Poles: 2~16
- ◆适用线规: AWG#28-#32
Applicable Wire: AWG#28-#32
- ◆额定电压: AC, DC, 125V (有效值)
Voltage rating: AC, DC, 125V(rms)
- ◆额定电流: 1.0A, AC, DC
Current rating: 1.0A, AC, DC
- ◆耐压值: 250V AC/minute
Withstand voltage: 250V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp: -25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance: ≥1000MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance: ≤20mΩ

接触件 (TERMINAL)

- ◆插针: Phosphor Bronze
(Ni:50u", Sn:120u")
- ◆Wafer: Nylon66(白), UL94-V0

REV.	新图面发行	2018. 11. 27	UNIT: MM	0.00±0.15	X° ±3°	SCALE: 1:1	NAME	DATE	TITLE: 1.25mm pitch Single Wafer	PART. NO: 1.25T-1-NAW
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	APPROVED				DWG. NO:
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DESIGNER				REV: A0 SHEET: 1/1

东莞市康导新能源科技有限公司
DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD
公司网址: www.dgoonne.cn 公司电话: 0769-85337633
邮箱: 2850175986@qq.com 公司传真: 0769-85392827