
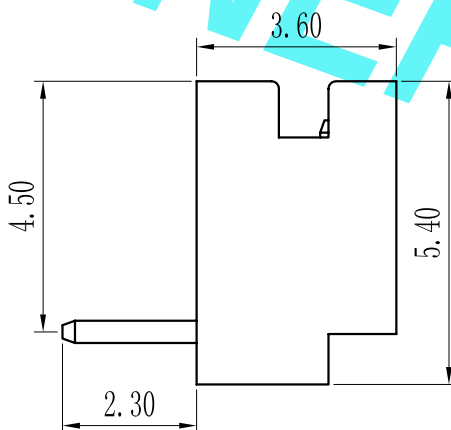
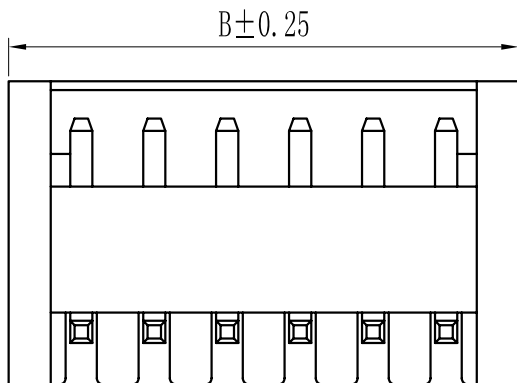
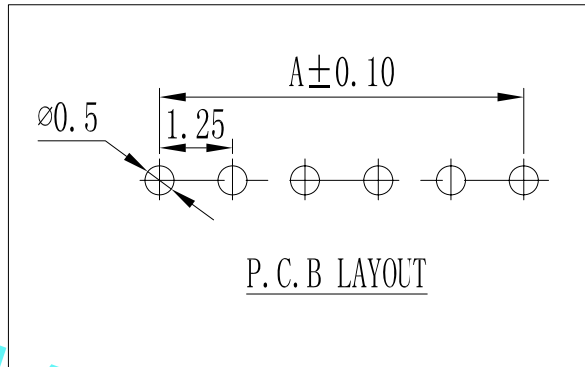


环保物料

Pin数	尺寸A	尺寸B
2	1.25	3.75
3	2.50	5.00
4	3.75	6.25
5	5.00	7.50
6	6.25	8.75
7	7.50	10.00
8	8.75	11.25
9	10.00	12.50
10	11.25	13.75
11	12.50	15.00
12	13.75	16.25
13	15.00	17.50
14	16.25	18.75
15	17.50	20.00
16	18.75	21.25
17	20.00	22.50
18	21.25	23.75
19	22.50	25.00
20	23.75	26.25
21	25.00	27.50
22	26.25	28.75
23	27.50	30.00
24	28.75	31.25
25	30.00	32.50

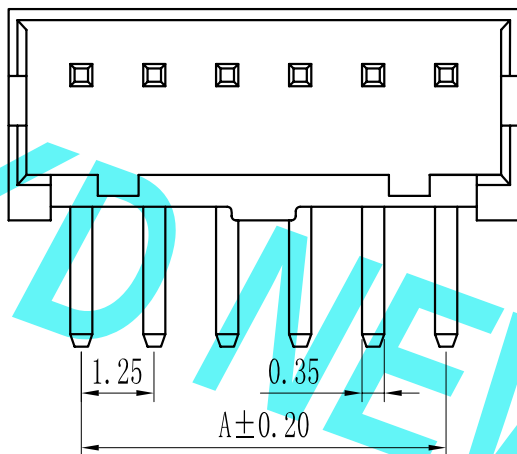

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28-#32
Applicable Wire:AWG#28-#32
- ◆额定电压: AC, DC, 125V (有效值)
Voltage rating: AC, DC, 125V(rms)
- ◆额定电流: 1.0A, AC, DC
Current rating:1.0A, AC, DC
- ◆耐压值: 250V AC/minute
Withstand voltage:250V AC/minute
- ◆工作温度: -40℃~+85℃
Working Temp:-40℃~+85℃
- ◆绝缘电阻: ≥100MΩ
Insulation resistance:≥100MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙6T, UL94-V0
Insulator:Nylon46, UL94-V0
- ◆接触针: 磷铜
Cobtact PIN:Phosphor bronze

A0		新图面发行	2018. 11. 27	UNIT: MM	0.00±0.15	X° ±3°	SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD		PART. NO:	9814-NA	
REV.		REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	APPROVED			公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮箱: 2850175986@qq.com 公司传真: 0769-85392827		DWG. NO:		
							DESIGNER			TITLE:		REV:	A0	SHEET: 1/1
							DRAWN	肖丽娟	2018. 11. 27	1.25mm pitch Single Wafer				