

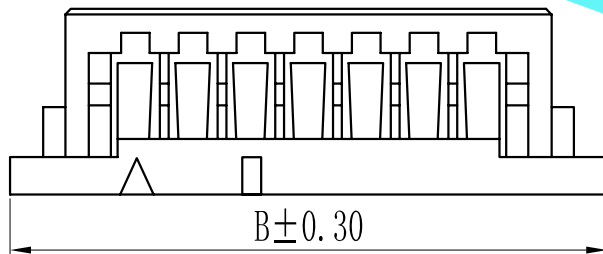


环保物料

Pin数	尺寸A	尺寸B
4	3.75	9.20
5	5.00	10.45
6	6.25	11.70
7	7.50	12.95
8	8.75	14.20
9	10.00	15.42
10	11.25	16.70
11	12.50	17.95
12	13.75	19.20
13	15.00	20.45
14	16.25	21.70
15	17.50	22.95
16	18.75	24.20
17	20.00	25.45
18	21.25	26.70
19	22.50	27.95
20	23.75	29.20
21	25.00	30.45
22	26.25	31.70
23	27.50	32.95
24	28.75	34.20
25	30.00	35.45
26	31.25	36.70
27	32.50	37.95

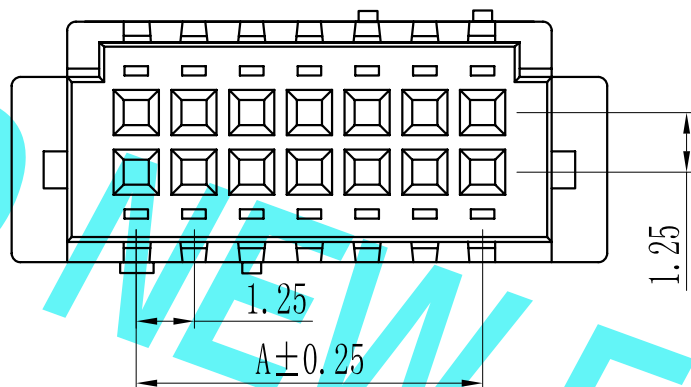

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28~#32
Applicable Wire: AWG#28~#32
- ◆额定电压: 125V DC, AC(rms)
Rated voltage: 125V DC, AC(rms)
- ◆额定电流: 1A(AWG #28)
Rated Current: 1A(AWG #28)
- ◆耐压值: 250V AC/minute
Withstand voltage: 250V AC/min
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: 100MΩ Min
Insulation resistance: ≥100MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance: ≤20mΩ

材料 MATERIAL

- ◆塑胶: 尼龙66 (Nylon66), UL94-V0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司地址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 9815-2NY		
				LINEAR	ANGLES	APPROVED					DWG. NO:	
				0.0±0.25	X° REF±6°	DESIGNER						
A0	新图面发行	2018.11.28	UNIT: MM	0.00±0.15	X° ±3°					TITLE: 1.25mm pitch Dual Housing		REV: A0
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.28				