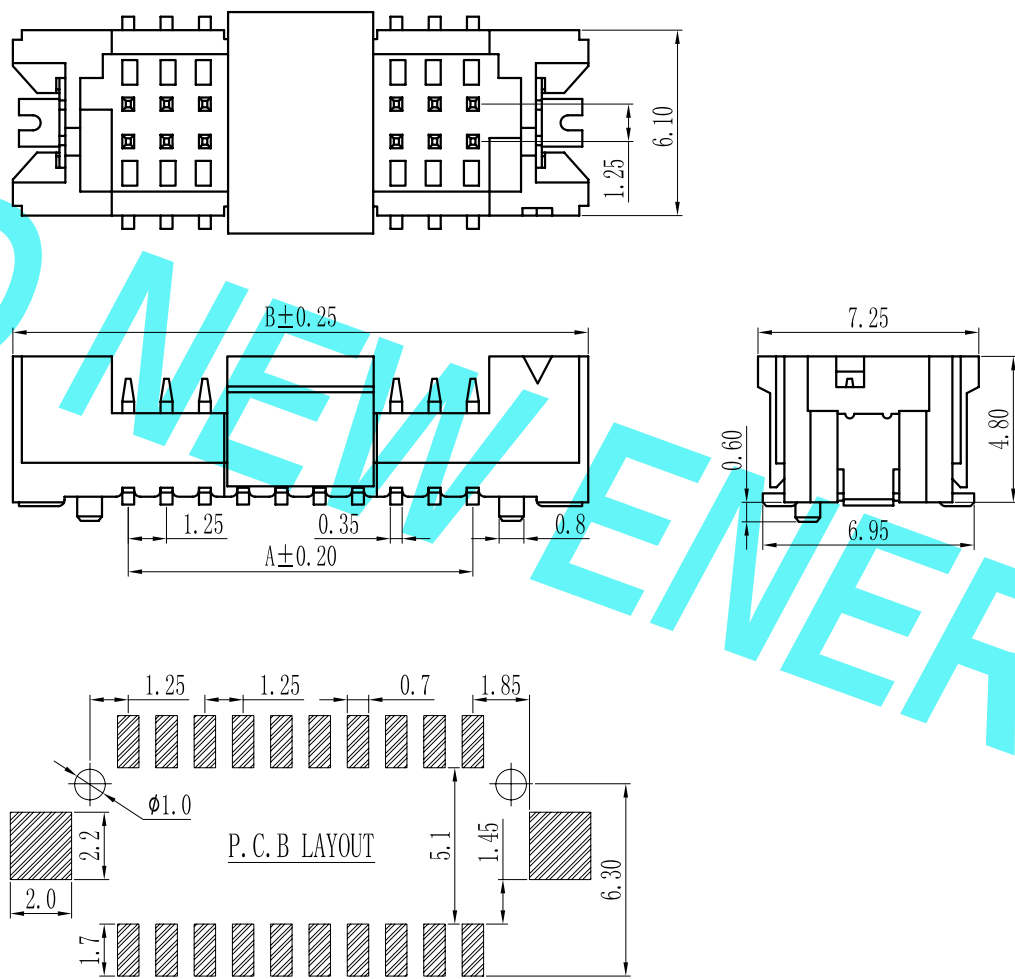


	1	2	3	4	5	6	7	8				
A	环保物料								A			
B	Pin数	尺寸A	尺寸B									
	5	5.00	12.50									
	6	6.25	13.75									
C	7	7.50	15.00									
	8	8.75	16.25									
	9	10.00	17.50									
D	10	11.25	18.75									
	11	12.50	20.00									
	12	13.75	21.25									
E	13	15.00	22.50									
	14	16.25	23.75									
	15	17.50	25.00									
F	16	18.75	26.25									
	17	20.00	27.50									
	18	21.25	28.75									
G	19	22.50	30.00									
	20	23.75	31.25									
	21	25.00	32.50									
H	22	26.25	33.75									
	23	27.50	35.00									
	24	28.75	36.25									
	25	31.25	37.50									
	26	32.50	38.75									
	27	33.75	40.00									
	28	35.00	41.25							技术参数 SPECIFICATIONS ◆适用线规: AWG#28-#32 Applicable Wire:AWG#28-#32 ◆额定电压: AC,DC,125V (有效值) Voltage rating: AC,DC,125V(rms) ◆额定电流: 0.5A, AC, DC (AWG#28) Current rating:0.5A, AC, DC (AWG#28) ◆耐压值: 250V AC/minute Withstand voltage:250V AC/minute ◆工作温度: -25℃~+85℃ Working Temp:-25℃~+85℃ ◆绝缘电阻: ≥100MΩ Insulation resistance:≥100MΩ ◆接触电阻: ≤20mΩ Contact resistance:≤20mΩ 材料 MATERIAL ◆绝缘体: 尼龙6T, UL94-V0 Insulator:Nylon46, UL94-V0 ◆接触针: 磷铜 Cobtact PIN:Phosphor bronze ◆焊片: 磷铜 Solder tab:Phosphor bronze		
H					GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 官网网址: www.dgoonne.cn 官网电话: 0769-85337633 邮箱: 2850175888@qq.com 官网传真: 0769-85382827	PART. NO: 1.25T-2 (DF13)	
					LINEAR	ANGLES	APPROVED				DWG. NO:	
	A0	新图面发行	2018.11.28		UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				TITLE: 1.25mm pitch Dual Wafer
	REV.	REVISION RECORD	DATE		SIZE: A4	0.000±0.08	X° X' ±2°	DRAWN	肖丽娟		2018.11.28	REV: A0 SHEET: 1/1
1		2	3	4	5	6	7	8				