
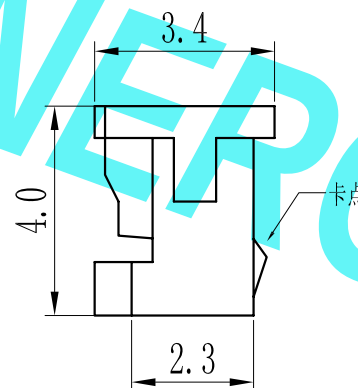
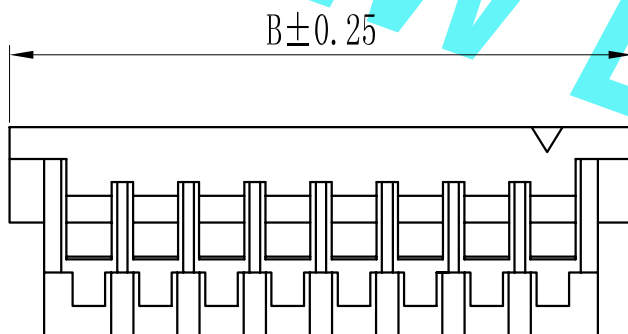


	1	2	3	4	5	6	7	8																																																							
A	环保物料																																																														
B																																																															
C																																																															
D																																																															
E																																																															
F																																																															
G																																																															
H																																																															
	技术参数 SPECIFICATIONS ◆间距：1.25 Pitch:1.25 ◆线数：2~15 Poles:2~15 ◆适用线规：AWG#26~30 Applocable wire:AWG#26~30 ◆额定电压：150V DC/AC(有效值) Voltage rating:150V DC/AC(rms) ◆额定电流：1.0A Current rating:1.0A ◆耐压值:500V AC/minute Withstand voltage:500V AC/minute ◆工作温度：-35℃~+85℃ Working Temp:-35℃~+85℃ ◆绝缘电阻：≥500MΩ Insulation resistance:≥500MΩ ◆接触电阻：≤30mΩ Contact resistance:≤30mΩ 注： 2P-3P:一个卡点 4P-16P:两个卡点																																																														
	<table border="1"> <thead> <tr> <th>Pin数</th><th>尺寸A</th><th>尺寸B</th></tr> </thead> <tbody> <tr><td>2</td><td>1.25</td><td>6.70</td></tr> <tr><td>3</td><td>2.50</td><td>7.95</td></tr> <tr><td>4</td><td>3.75</td><td>9.20</td></tr> <tr><td>5</td><td>5.00</td><td>10.45</td></tr> <tr><td>6</td><td>6.25</td><td>11.70</td></tr> <tr><td>7</td><td>7.50</td><td>12.95</td></tr> <tr><td>8</td><td>8.75</td><td>14.20</td></tr> <tr><td>9</td><td>10.00</td><td>15.45</td></tr> <tr><td>10</td><td>11.25</td><td>16.70</td></tr> <tr><td>11</td><td>12.50</td><td>17.95</td></tr> <tr><td>12</td><td>13.75</td><td>19.20</td></tr> <tr><td>13</td><td>15.00</td><td>20.45</td></tr> <tr><td>14</td><td>16.25</td><td>21.70</td></tr> <tr><td>15</td><td>17.50</td><td>22.95</td></tr> </tbody> </table>								Pin数	尺寸A	尺寸B	2	1.25	6.70	3	2.50	7.95	4	3.75	9.20	5	5.00	10.45	6	6.25	11.70	7	7.50	12.95	8	8.75	14.20	9	10.00	15.45	10	11.25	16.70	11	12.50	17.95	12	13.75	19.20	13	15.00	20.45	14	16.25	21.70	15	17.50	22.95										
Pin数	尺寸A	尺寸B																																																													
2	1.25	6.70																																																													
3	2.50	7.95																																																													
4	3.75	9.20																																																													
5	5.00	10.45																																																													
6	6.25	11.70																																																													
7	7.50	12.95																																																													
8	8.75	14.20																																																													
9	10.00	15.45																																																													
10	11.25	16.70																																																													
11	12.50	17.95																																																													
12	13.75	19.20																																																													
13	15.00	20.45																																																													
14	16.25	21.70																																																													
15	17.50	22.95																																																													
	<table border="1"> <thead> <tr> <th colspan="2"></th><th colspan="2">GENERAL TOLERANCES</th><th colspan="2">SCALE:</th><th rowspan="2">NAME</th><th rowspan="2">DATE</th><th colspan="2" rowspan="2">东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮 箱: 2850175966@qq.com 公司传真: 0769-85392827</th><th>PART. NO:</th></tr> <tr> <th colspan="2"></th><th>LINER</th><th>ANGLES</th><th colspan="6">1:1</th><th>1.25T-2-NY</th></tr> </thead> <tbody> <tr> <td></td><td></td><td>0.0±0.25</td><td>X° REF±6°</td><td>APPROVED</td><td></td><td></td><td></td><td colspan="2" rowspan="2">TITLE: 1.25mm pitch Single Housing</td><td>DWG. NO:</td></tr> <tr> <td>AO</td><td>新图面发行</td><td>2018.11.28</td><td>UNIT: MM</td><td>DESIGNER</td><td></td><td></td><td></td><td>REV: AO</td></tr> <tr> <td>REV.</td><td>REVISION RECORD</td><td>DATE</td><td>SIZE: A4</td><td>DRAWN</td><td>肖丽娟</td><td>2018.11.28</td><td></td><td></td><td>SHEET: 1/1</td><td></td></tr> </tbody> </table>												GENERAL TOLERANCES		SCALE:		NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮 箱: 2850175966@qq.com 公司传真: 0769-85392827		PART. NO:			LINER	ANGLES	1:1						1.25T-2-NY			0.0±0.25	X° REF±6°	APPROVED				TITLE: 1.25mm pitch Single Housing		DWG. NO:	AO	新图面发行	2018.11.28	UNIT: MM	DESIGNER				REV: AO	REV.	REVISION RECORD	DATE	SIZE: A4	DRAWN	肖丽娟	2018.11.28			SHEET: 1/1	
		GENERAL TOLERANCES		SCALE:		NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮 箱: 2850175966@qq.com 公司传真: 0769-85392827		PART. NO:																																																					
		LINER	ANGLES	1:1						1.25T-2-NY																																																					
		0.0±0.25	X° REF±6°	APPROVED				TITLE: 1.25mm pitch Single Housing		DWG. NO:																																																					
AO	新图面发行	2018.11.28	UNIT: MM	DESIGNER						REV: AO																																																					
REV.	REVISION RECORD	DATE	SIZE: A4	DRAWN	肖丽娟	2018.11.28			SHEET: 1/1																																																						
	1	2	3	4	5	6	7	8																																																							

Pin数	尺寸A	尺寸B
2	1.25	6.70
3	2.50	7.95
4	3.75	9.20
5	5.00	10.45
6	6.25	11.70
7	7.50	12.95
8	8.75	14.20
9	10.00	15.45
10	11.25	16.70
11	12.50	17.95
12	13.75	19.20
13	15.00	20.45
14	16.25	21.70
15	17.50	22.95

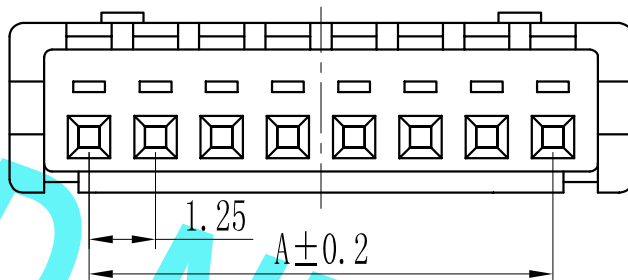

- ◆间距: 1.25
Pitch: 1.25
- ◆线数: 2~15
Poles: 2~15
- ◆适用线规: AWG#26~30
Applicable wire: AWG#26~30
- ◆额定电压: 150V DC/AC(有效值)
Voltage rating: 150V DC/AC(rms)
- ◆额定电流: 1.0A
Current rating: 1.0A
- ◆耐压值: 500V AC/minute
Withstand voltage: 500V AC/minute
- ◆工作温度: $-35^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Working Temp: $-35^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆绝缘电阻: $\geq 500\text{M}\Omega$
Insulation resistance: $\geq 500\text{M}\Omega$
- ◆接触电阻: $\leq 30\text{m}\Omega$
Contact resistance: $\leq 30\text{m}\Omega$

注: 2P-3P:一个卡点
4P-16P:两个卡点

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮 箱: 2850175866@qq.com 公司传真: 0769-85392627	PART. NO: 1.25T-2-NY	
				LINEAR	ANGLES	APPROVED				DWG. NO:	
				0.0±0.25	X° REF±6°						
A0	新图面发行	2018.11.28		UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				TITLE: 1.25mm pitch Single Housing
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.28			

 **东莞市康导新能源科技有限公司**
DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD

公司网址: www.dgconne.cn 公司电话: 0769-85337633
邮箱: 2850175868@qq.com 公司传真: 0769-85362827

PART. NO: 1.25T-2-NY

DWG. NO:

TITLE: 1.25mm pitch Single Housing

REV: A0	SHEET: 1 / 1
---------	--------------