
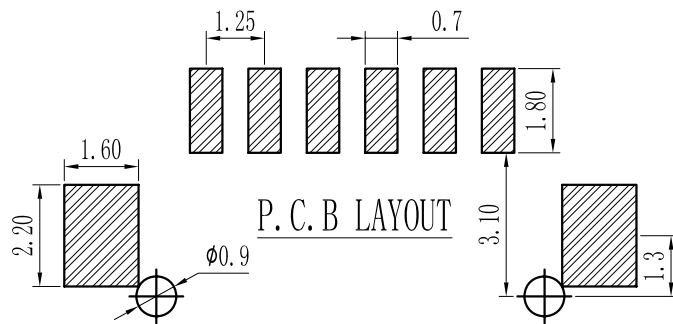

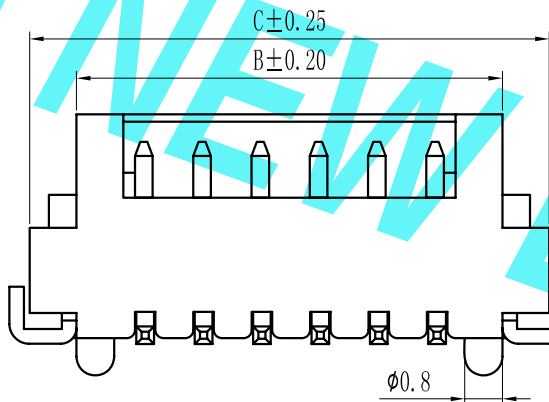


环保物料

Pin数	尺寸A	尺寸B	尺寸C
2	1.25	4.15	6.25
3	2.50	5.40	7.50
4	3.75	6.65	8.75
5	5.00	7.90	10.00
6	6.25	9.15	11.25
7	7.50	10.40	12.50
8	8.75	11.65	13.75
9	10.00	12.90	15.00
10	11.25	14.15	16.25
11	12.50	15.40	17.50
12	13.75	16.65	18.75
13	15.00	17.90	20.00
14	16.25	19.15	21.25
15	17.50	20.40	22.50
16	18.75	21.65	23.75
17	20.00	22.90	25.00
18	21.25	24.15	26.25
19	22.50	25.40	27.50
20	23.75	26.65	28.75
21	25.00	27.90	30.00
22	26.25	29.15	31.25
23	27.50	30.40	32.50
24	28.75	31.65	33.75
25	30.00	32.90	35.00

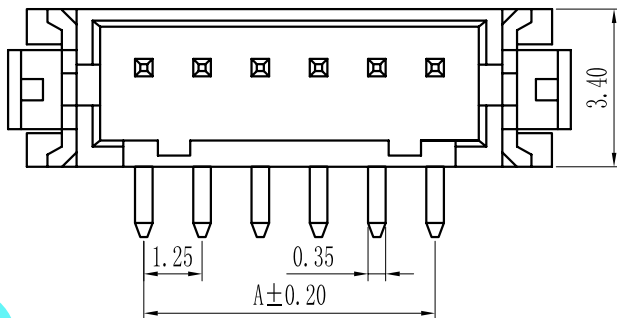

技术参数 SPECIFICATIONS

- ◆间距: 1.25 Pitch:1.25
- ◆极数: 2~16 Poles:2~16
- ◆适用线规: AWG#28-#32
Applicable Wire:AWG#28-#32
- ◆额定电压: AC,DC, 125V (有效值)
Voltage rating: AC,DC, 125V(rms)
- ◆额定电流: 0.5A, AC, DC (AWG#28)
Current rating:0.5A, AC, DC (AWG#28)
- ◆耐压值: 250V AC/minute
Withstand voltage:250V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

接触件 (TERMINAL)

- ◆材质: 磷铜
Material:Phosphor Bronze

塑胶本体 (HOUSING)

- ◆材质: 尼龙46 (Nylon46), UL94-V0

包装方式 (PACKAGE)

- ◆管装 Pipe Package
- ◆卷装 Winding Package
- ◆编带包装 Reel Package

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0. 0±0. 25	X° REF±6°	APPROVED		
A0	新图面发行	2018. 11. 28		UNIT: MM	0. 00±0. 15	X° ±3°	DESIGNER	
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 08	X° X'±2°	DRAWN	肖丽娟	2018. 11. 28

东莞市康导新能源科技有限公司
DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD
公司网址: www.dgoonne.cn 公司电话: 0769-85337533
邮箱: 2850175986@qq.com 公司传真: 0769-85392827

PART. NO: 9813V-XX

DWG. NO:

TITLE: 1.25mm pitch Crimp Terminal

REV: A0 SHEET: 1/1