


环保物料

Pin	A	B	C
4	1.50	2.60	9.50
5	2.00	3.10	10.00
6	2.50	3.60	10.50
7	3.00	4.10	11.00
8	3.50	4.60	11.50
9	4.00	5.10	12.00
10	4.50	5.60	12.50
11	5.00	6.10	13.00
12	5.50	6.60	13.50
13	6.00	7.10	14.00
14	6.50	7.60	14.50
15	7.00	8.10	15.00
16	7.50	8.60	15.50
17	8.00	9.10	16.00
18	8.50	9.60	16.50
19	9.00	10.10	17.00
20	9.50	10.60	17.50
21	10.00	11.10	18.00
22	10.50	11.60	18.50
23	11.00	12.10	19.00
24	11.50	12.60	19.50
25	12.00	13.10	20.00
26	12.50	13.60	20.50
27	13.00	14.10	21.00
28	13.50	14.60	21.50
29	14.00	15.10	22.00
30	14.50	15.60	22.50
31	15.00	16.10	23.00
32	15.50	16.60	23.50
33	16.00	17.10	24.00
34	16.50	17.60	24.50
35	17.00	18.10	25.00
36	17.50	18.60	25.50
37	18.00	19.10	26.00
38	18.50	19.60	26.50
39	19.00	20.10	27.00
40	19.50	20.60	27.50
41	20.00	21.10	28.00
42	20.50	21.60	28.50
43	21.00	22.10	29.00
44	21.50	22.60	29.50
45	22.00	23.10	30.00
46	22.50	23.60	30.50
47	23.00	24.10	31.00
48	23.50	24.60	31.50
49	24.00	25.10	32.00
50	24.50	25.60	32.50
51	25.00	26.10	33.00
52	25.50	26.60	33.50
53	26.00	27.10	34.00
54	26.50	27.60	34.50
55	27.00	28.10	35.00
56	27.50	28.60	35.50
57	28.00	29.10	36.00
58	28.50	29.60	36.50
59	29.00	30.10	37.00
60	29.50	30.60	37.50

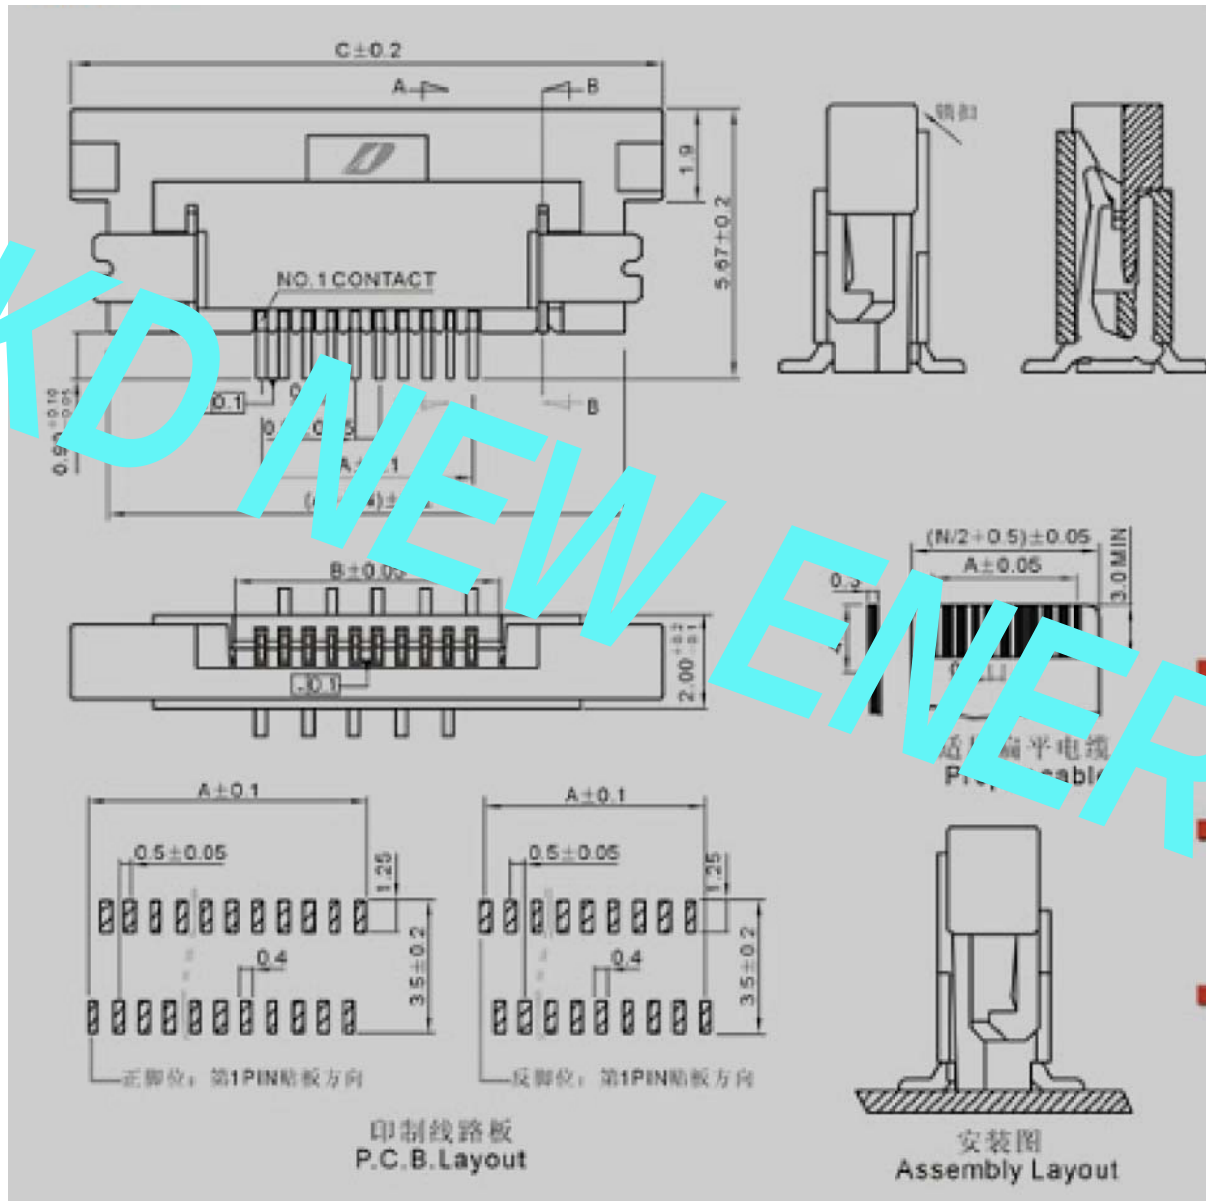

技术参数SPECIFICATIONS
极数: 4~60
Poles:4~60
额定电压: AC, DC, 50V (50HZ有效值)
Voltage rating:AC, DC, 50V (50HZ有效值)
额定电流: 0. 4A, AC, DC
Current rating:0. 4A, AC, DC
耐压值: 200V AC/minute
Withstang voltage:200V AC/minute
工作温度: -20℃~+85℃
Working Temperature:-20℃~+85℃
绝缘电阻: ≥500MΩ
Insulation resistance:≥500MΩ
接触电阻: ≤0. 02Ω
Contact resistance: ≤0. 02Ω
单面接触
Single Contact

接触件TERMINAL
材质: 磷青铜
Material:Phosphor Bronze
胶主件HOUSING
材质: 塑料, UL 94V-0
Material:Thermoplastic, UL 94V-0
包装方式PACKAGE
管装Tape Package

间距:(Pitch) 0.5 E-LT-n P F
型号:(Model)
立式: L
Vertical type:L
贴式: T
SMT:T
线数 (Hole location)
反针: F (正针无)
Reversed pointer:F:none for positive pointer)

REV.	新图面发行	2018. 11. 28	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮箱: 2850175988@qq.com 公司传真: 0769-85392827	PART. NO: FPC 0.5E-LT
				LINEAR	ANGLES					
A0	新图面发行	2018. 11. 28	UNIT: MM	0. 00±0. 15	X° REF±6°	APPROVED				
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 08	X° X'±2°	DESIGNER			TITLE: 0.5mm pitch Dual Wafer	DWG. NO: KDFPC-0008
						DRAWN	肖丽娟	2018. 11. 28		REV: A0 SHEET: 1/1