


环保物料

尺寸 Size	A	B	C	D	E
4	1.50	4.30	6.40	2.70	5.80
5	2.00	4.70	6.90	3.20	6.30
6	2.50	5.20	7.40	3.70	6.80
7	3.00	5.70	7.90	4.20	7.30
8	3.50	6.20	8.40	4.70	7.80
9	4.00	6.70	8.90	5.20	8.30
10	4.50	7.20	9.40	5.70	8.80
11	5.00	7.70	9.90	6.20	9.30
12	5.50	8.20	10.40	6.70	9.80
13	6.00	8.70	10.90	7.20	10.30
14	6.50	9.20	11.40	7.70	10.80
15	7.00	9.70	11.90	8.20	11.30
16	7.50	10.20	12.40	8.70	11.80
17	8.00	10.70	12.90	9.20	12.30
18	8.50	11.20	13.40	9.70	12.80
19	9.00	11.70	13.90	10.20	13.30
20	9.50	12.20	14.40	10.70	13.80
21	10.00	12.70	14.90	11.20	14.30
22	10.50	13.20	15.40	11.70	14.80
23	11.00	13.70	15.90	12.20	15.30
24	11.50	14.20	16.40	12.70	15.80
25	12.00	14.70	16.90	13.20	16.30
26	12.50	15.20	17.40	13.70	16.80
27	13.00	15.70	17.90	14.20	17.30
28	13.50	16.20	18.40	14.70	17.80
29	14.00	16.70	18.90	15.20	18.30
30	14.50	17.20	19.40	15.70	18.80
31	15.00	17.70	19.90	16.20	19.30
32	15.50	18.20	20.40	16.70	19.80
33	16.00	18.70	20.90	17.20	20.30
34	16.50	19.20	21.40	17.70	20.80
35	17.00	19.70	21.90	18.20	21.30
36	17.50	20.20	22.40	18.70	21.80
37	18.00	20.70	22.90	19.20	22.30
38	18.50	21.20	23.40	19.70	22.80
39	19.00	21.70	23.90	20.20	23.30
40	19.50	22.20	24.40	20.70	23.80
41	20.00	22.70	24.90	21.20	24.30
42	20.50	23.20	25.40	21.70	24.80
43	21.00	23.70	25.90	22.20	25.30
44	21.50	24.20	26.40	22.70	25.80
45	22.00	24.70	26.90	23.20	26.30
46	22.50	25.20	27.40	23.70	26.80
47	23.00	25.70	27.90	24.20	27.30
48	23.50	26.20	28.40	24.70	27.80
49	24.00	26.70	28.90	25.20	28.30
50	24.50	27.20	29.40	25.70	28.80

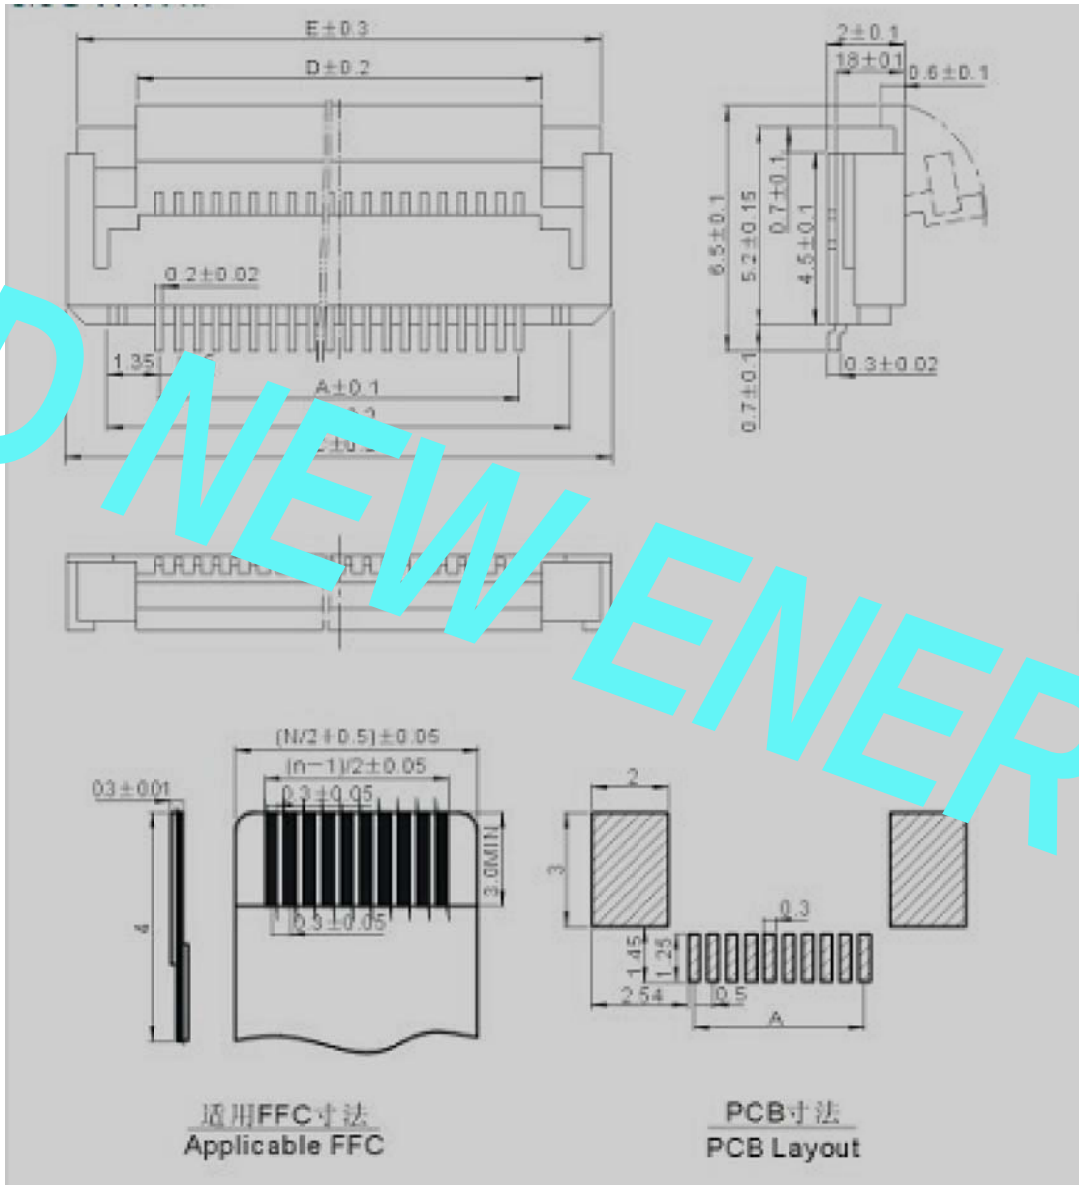

技术参数SPECIFICATIONS

极数: 4~50

Poles:4~50

额定电压: AC, DC, 50V (50HZ有效值)

Voltage rating:AC, DC, 50V (50HZ有效值)

额定电流: 0.5A, AC, DC

Current rating:0.5A, AC, DC

耐压值: 200V AC/minute

Withstang voltage:200V AC/minute

工作温度: -20℃~+85℃

Working Temperature:-20℃~+85℃

绝缘电阻:500MΩ MIN

Insulation resistance:500MΩ MIN

接触电阻: 30Ω MAX

Contact resistance: 30Ω MAX

单面接触

Single Contact

接触件TERMINAL

材质: 磷青铜

Material:Phosphor Bronze Tin-plated

贴片: 磷青铜 镀锡


Solder tab:Phosphor Bronze Tin-plated

塑胶主体: 阻燃树脂 (UL94V-0)

Housing:heat resistance plastic(UL94V-0)

锁紧: 阻燃树脂 (UL94V-0)

Slider:Heat resistance plastic(UL94V-0)



				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgconne.cn 公司电话: 0769-85337833 邮 箱: 2850175988@qq.com 公司传真: 0769-8532827	PART. NO: FPC 0.5G
				LINEAR	ANGLES	APPROVED				
				0.0±0.25	X° REF±6°	DESIGNER				
AO	新图面发行	2018.11.28	UNIT: MM	0.00±0.15	X° ±3°					TITLE: 0.5mm pitch Single Wafer
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.28		REV: A0 SHEET: 1/1