
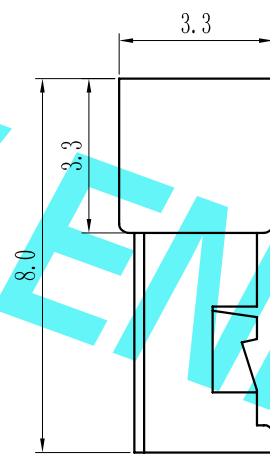

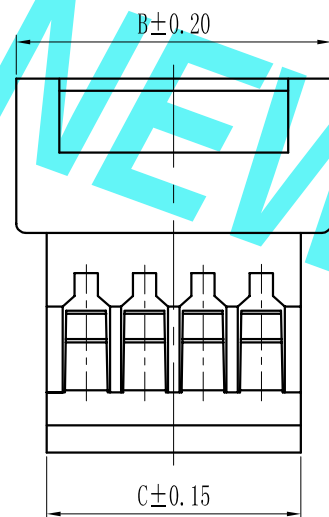


Pin数	尺寸A	尺寸B	尺寸C
4	3.75	6.75	5.45
5	5.00	8.00	6.70
6	6.25	9.25	7.95
7	7.50	10.50	9.20
8	8.75	11.75	10.45
9	10.00	13.00	11.70
10	11.25	14.25	12.95
11	12.50	15.50	14.20
12	13.75	16.75	15.45
13	15.00	18.00	16.70
14	16.25	19.25	17.95
15	17.50	20.50	19.20
16	18.75	21.75	20.45
17	20.00	23.00	21.70
18	21.25	24.25	22.95
19	22.50	25.55	24.20
20	23.75	26.75	25.45
21	25.00	28.00	26.70
22	26.25	29.27	27.95
23	27.50	30.52	29.20
24	28.75	31.77	30.45
25	30.00	33.02	31.70
26	31.25	34.27	32.95
27	32.50	35.52	34.20



◆适用线规: AWG#28~#32

Applicable Wire: AWG#28~#32

◆额定电压: 125V DC, AC(rms)

Rated voltage: 125V DC, AC(rms)

◆额定电流: 1A (AWG #28)

Rated Current: 1A (AWG #28)

◆耐压值: 250V AC/minute

Withstand voltage: 250V AC/min

◆工作温度：-40℃~+85℃

Working Temp:-40°C~+85°C

◆绝缘电阻：100MΩ Min

Insulation resistance: $\geq 100\text{M}\Omega$

◆接触电阻: $\leq 20\text{m}\Omega$

Contact resistance: $\leq 20 \text{ m}\Omega$

◆**塑胶**：尼龙66 (Nylon66), UL94-V0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2860175666@qq.com 公司传真: 0769-85392827	PART. NO: 1.25T-1-NA(对插)	
				LINEAR	ANGLES					APPROVED	
				0.0±0.25	X° REF±6°	DESIGNER					
A0	新图面发行	2018.11.28	UNIT: MM	0.00±0.15	X° ±3°					DRAWN	肖丽娟
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X' ±2°	SHEET:	1/1				

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---