
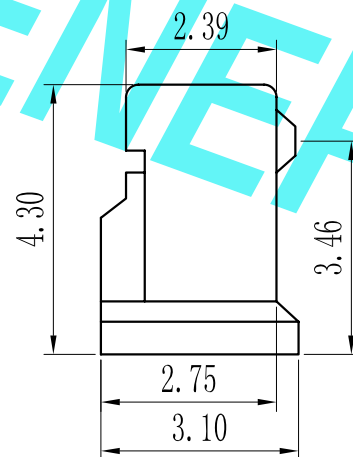
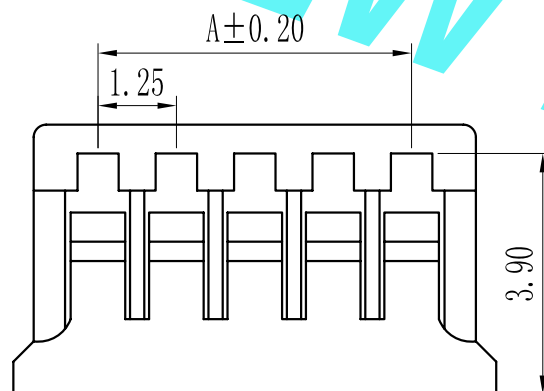


环保物料

Pin数	尺寸A	尺寸B
2	1.25	3.95
3	2.50	5.20
4	3.75	6.45
5	5.00	7.70
6	6.25	8.95
7	7.50	10.20
8	8.75	11.45
9	10.00	12.70
10	11.25	13.95
11	12.50	15.20
12	13.75	16.45
13	15.00	17.70
14	16.25	18.95
15	17.50	20.20
16	18.75	21.45
17	20.00	22.70
18	21.25	23.95
19	22.50	25.20
20	23.75	26.45
21	25.00	27.70
22	26.25	28.95
23	27.50	30.20
24	28.75	31.45
25	30.00	32.70

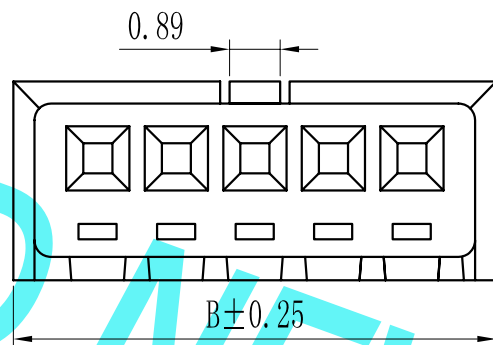

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28~#32
Applicable Wire: AWG#28~#32
- ◆额定电压: 125V DC, AC(rms)
Rated voltage: 125V DC, AC(rms)
- ◆额定电流: 1A(AWG #28)
Rated Current: 1A(AWG #28)
- ◆耐压值: 250V AC/minute
Withstand voltage: 250V AC/min
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: 100MΩ Min
Insulation resistance: ≥100MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance: ≤20mΩ

材料 MATERIAL

- ◆塑胶: 尼龙66 (Nylon66), UL94-V0

H				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD. 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 1.25T-3-NY
					LINEAR	ANGLES	APPROVED			DWG. NO:
					0.0±0.25	X° REF±6°	DESIGNER			
	A0	新图面发行	2018.11.29		0.00±0.15	X° ±3°	DRAWN	肖丽娟		1.25mm pitch Single Housing
	REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°				REV: A0 SHEET: 1/1