
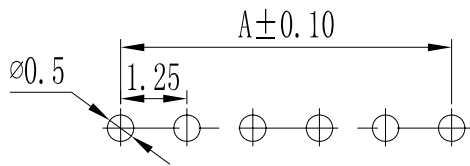
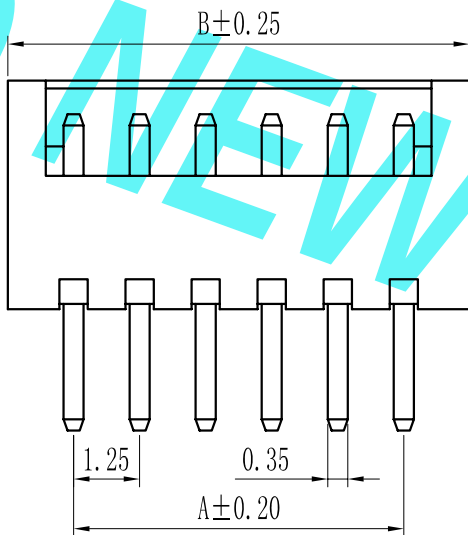


# 环保物料

| Pin数 | 尺寸A   | 尺寸B   |
|------|-------|-------|
| 2    | 1.25  | 3.75  |
| 3    | 2.50  | 5.00  |
| 4    | 3.75  | 6.25  |
| 5    | 5.00  | 7.50  |
| 6    | 6.25  | 8.75  |
| 7    | 7.50  | 10.00 |
| 8    | 8.75  | 11.25 |
| 9    | 10.00 | 12.50 |
| 10   | 11.25 | 13.75 |
| 11   | 12.50 | 15.00 |
| 12   | 13.75 | 16.25 |
| 13   | 15.00 | 17.50 |
| 14   | 16.25 | 18.75 |
| 15   | 17.50 | 20.00 |
| 16   | 18.75 | 21.25 |
| 17   | 20.00 | 22.50 |
| 18   | 21.25 | 23.75 |
| 19   | 22.50 | 25.00 |
| 20   | 23.75 | 26.25 |
| 21   | 25.00 | 27.50 |
| 22   | 26.25 | 28.75 |
| 23   | 27.50 | 30.00 |
| 24   | 28.75 | 31.25 |
| 25   | 30.00 | 32.50 |

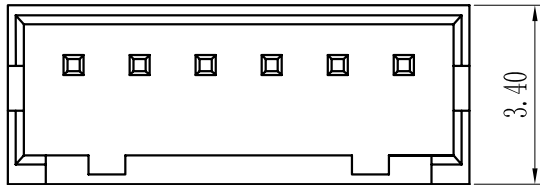

P. C. B LAYOUT

## 技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28-#32  
Applicable Wire: AWG#28-#32
- ◆额定电压: AC, DC, 125V (有效值)  
Voltage rating: AC, DC, 125V(rms)
- ◆额定电流: 1.0A, AC, DC  
Current rating: 1.0A, AC, DC
- ◆耐压值: 250V AC/minute  
Withstand voltage: 250V AC/minute
- ◆工作温度: -40℃~+85℃  
Working Temp: -40℃~+85℃
- ◆绝缘电阻:  $\geq 100M\Omega$   
Insulation resistance:  $\geq 100M\Omega$
- ◆接触电阻:  $\leq 20m\Omega$   
Contact resistance:  $\leq 20m\Omega$

## 材料 MATERIAL

- ◆绝缘体: 尼龙6T, UL94-V0  
Insulator: Nylon46, UL94-V0
- ◆接触针: 磷铜  
Cobtact PIN: Phosphor bronze

| REV. | 新图面发行           | 2018. 11. 29 | UNIT: MM | GENERAL TOLERANCES |           | SCALE: 1:1 | NAME | DATE         |
|------|-----------------|--------------|----------|--------------------|-----------|------------|------|--------------|
|      |                 |              |          | LINEAR             | ANGLES    |            |      |              |
|      |                 |              |          | 0.00±0.25          | X° REF±6° |            |      |              |
|      |                 |              |          | 0.00±0.15          | X° ±3°    |            |      |              |
| REV. | REVISION RECORD | DATE         | SIZE: A4 | 0.000±0.08         | X° X'±2°  | DRAWN      | 肖丽娟  | 2018. 11. 29 |
|      |                 |              |          |                    |           |            |      |              |

东莞市康导新能源科技有限公司  
DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD  
公司网址: www.dgoonne.cn 公司电话: 0769-85337533  
邮箱: 2850175986@qq.com 公司传真: 0769-85392827

TITLE:  
1.25mm pitch Single Wafer

PART. NO:  
1.25T-3-NA

DWG. NO:

REV: A0 SHEET: 1/1