
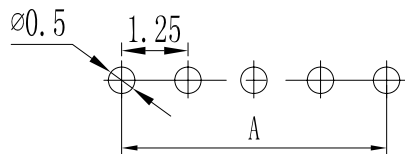
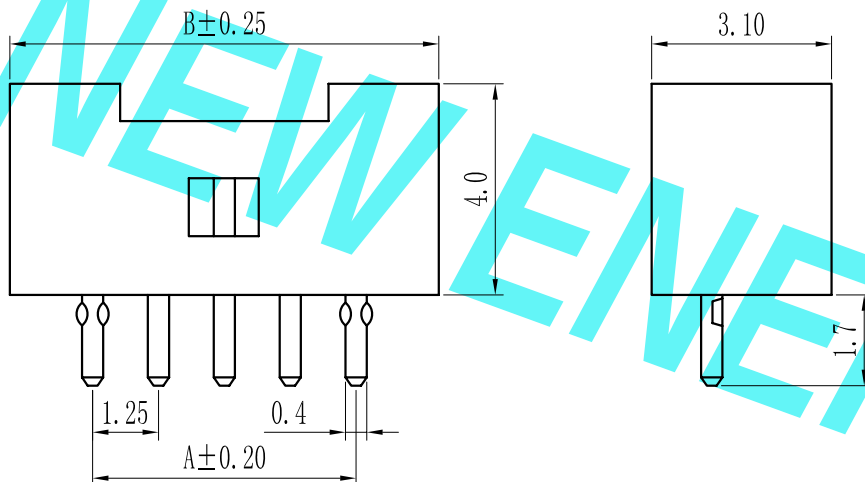


环保物料

Pin数	尺寸A	尺寸B
2	1.25	4.35
3	2.50	5.60
4	3.75	6.85
5	5.00	8.10
6	6.25	9.35
7	7.50	10.60
8	8.75	11.85
9	10.00	13.10
10	11.25	14.35
11	12.50	15.60
12	13.75	16.85
13	15.00	18.10
14	16.25	19.35
15	17.50	20.60
16	18.75	21.85
17	20.00	23.10
18	21.25	24.35
19	22.50	25.60
20	23.75	26.85
21	25.00	28.10
22	26.25	29.35
23	27.50	30.60
24	28.75	31.85
25	30.00	33.10

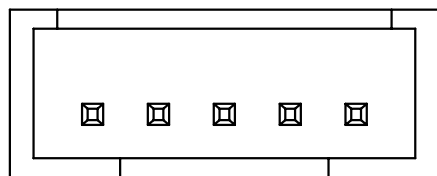

P. C. B LAYOUT

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28-#32
Applicable Wire:AWG#28-#32
- ◆额定电压: AC,DC, 125V (有效值)
Voltage rating: AC,DC, 125V(rms)
- ◆额定电流: 1.0A, AC, DC
Current rating:1.0A, AC, DC
- ◆耐压值: 250V AC/minute
Withstand voltage:250V AC/minute
- ◆工作温度: -40℃~+85℃
Working Temp:-40℃~+85℃
- ◆绝缘电阻: ≥100MΩ
Insulation resistance:≥100MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙6T, UL94-V0
Insulator:Nylon46, UL94-V0
- ◆接触针: 磷铜
Cobtact PIN:Phosphor bronze

REV.	新图面发行	2018. 11. 29	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO: 1.25T-3-NA
				LINEAR	ANGLES				
				0.0±0.25	X° REF±6°	APPROVED			DWG. NO:
				0.00±0.15	X° ±3°	DESIGNER			
				0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018. 11. 29	REV: A0
									SHEET: 1/1


东莞市康导新能源科技有限公司
 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD
 公司网址: www.dgoonne.cn 公司电话: 0769-85337533
 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827

TITLE:
1.25mm pitch Single Wafer