


环保物料

Pin数	尺寸A	尺寸B
2	1.25	4.35
3	2.50	5.60
4	3.75	6.85
5	5.00	8.10
6	6.25	9.35
7	7.50	10.60
8	8.75	11.85
9	10.00	13.10
10	11.25	14.35
11	12.50	15.60
12	13.75	16.85
13	15.00	18.10
14	16.25	19.35
15	17.50	20.60
16	18.75	21.85
17	20.00	23.10
18	21.25	24.35
19	22.50	25.60
20	23.75	26.85
21	25.00	28.10
22	26.25	29.35
23	27.50	30.60
24	28.75	31.85
25	30.00	33.10

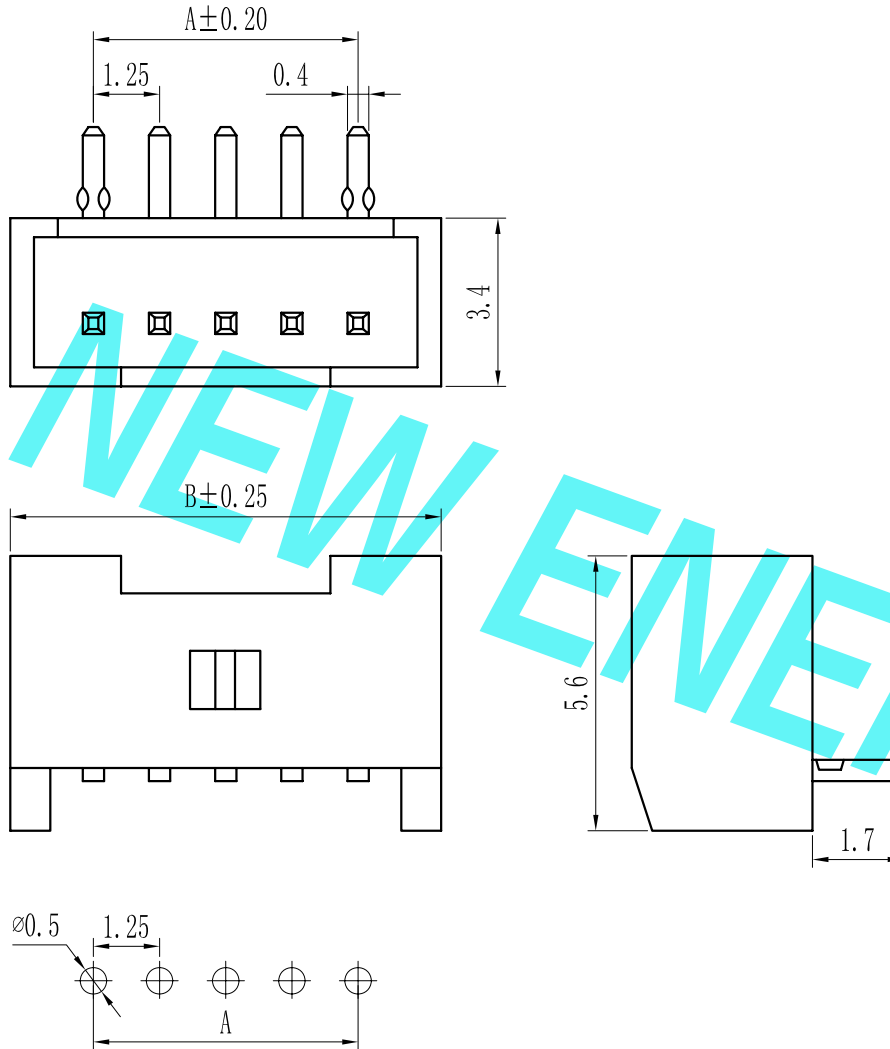

P. C. B LAYOUT

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28-#32
Applicable Wire:AWG#28-#32
- ◆额定电压: AC,DC, 125V (有效值)
Voltage rating: AC,DC, 125V (rms)
- ◆额定电流: 1.0A, AC, DC
Current rating:1.0A, AC, DC
- ◆耐压值: 250V AC/minute
Withstand voltage:250V AC/minute
- ◆工作温度: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Working Temp: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆绝缘电阻: $\geq 100\text{M}\Omega$
Insulation resistance: $\geq 100\text{M}\Omega$
- ◆接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙6T, UL94-V0
Insulator:Nylon46, UL94-V0
- ◆接触针: 磷铜
Cobtact PIN:Phosphor bronze

REV.	新图面发行	2018. 11. 29	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 1.25T-3-NA
				LINEAR	ANGLES					
				0.0 $\pm$ 0.25	X° REF $\pm$ 6°					
				0.00 $\pm$ 0.15	X° $\pm$ 3°					
REV.	REVISION RECORD	DATE	SIZE: A4	0.000 $\pm$ 0.08	X° X' $\pm$ 2°	DRAWN	肖丽娟	2018. 11. 29	TITLE: 1.25mm pitch Single Wafer	DWG. NO:
									REV: A0	SHEET: 1/1