


# 环保物料

| Pin数 | 尺寸A   | 尺寸B   | 尺寸C   |
|------|-------|-------|-------|
| 2    | 1.25  | 2.72  | 5.72  |
| 3    | 2.50  | 3.97  | 6.97  |
| 4    | 3.75  | 5.22  | 8.22  |
| 5    | 5.00  | 6.47  | 9.47  |
| 6    | 6.25  | 7.72  | 10.72 |
| 7    | 7.50  | 8.97  | 11.97 |
| 8    | 8.75  | 10.22 | 13.22 |
| 9    | 10.00 | 11.47 | 14.47 |
| 10   | 11.25 | 12.72 | 15.72 |
| 11   | 12.50 | 13.97 | 16.97 |
| 12   | 13.75 | 15.22 | 18.22 |
| 13   | 15.00 | 16.47 | 19.47 |
| 14   | 16.25 | 17.72 | 20.72 |
| 15   | 17.50 | 18.97 | 21.97 |
| 16   | 18.75 | 20.22 | 23.22 |
| 17   | 20.00 | 21.47 | 24.47 |
| 18   | 21.25 | 22.72 | 25.72 |
| 19   | 22.50 | 23.97 | 26.97 |
| 20   | 23.75 | 25.22 | 28.22 |
| 21   | 25.00 | 26.47 | 29.47 |
| 22   | 26.25 | 27.72 | 30.72 |
| 23   | 27.50 | 28.97 | 31.97 |
| 24   | 28.75 | 30.22 | 33.22 |
| 25   | 30.00 | 31.47 | 34.47 |

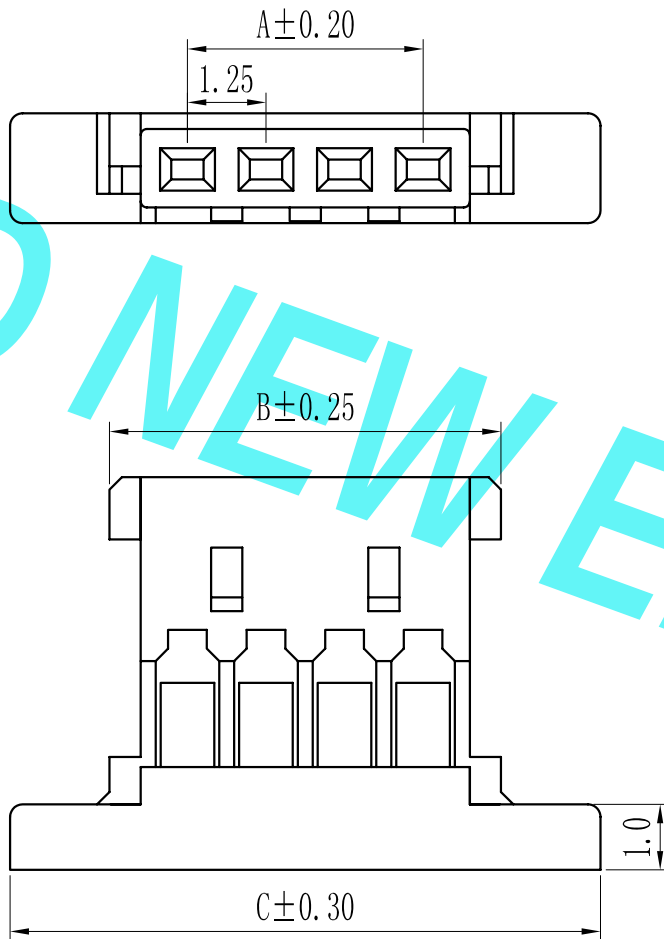

## 技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28~#32  
Applicable Wire: AWG#28~#32
- ◆额定电压: 125V DC, AC(rms)  
Rated voltage: 125V DC, AC(rms)
- ◆额定电流: 1A(AWG #28)  
Rated Current: 1A(AWG #28)
- ◆耐压值: 250V AC/minute  
Withstand voltage: 250V AC/min
- ◆工作温度: -25℃~+85℃  
Working Temp:-25℃~+85℃
- ◆绝缘电阻: 100MΩ Min  
Insulation resistance: ≥100MΩ
- ◆接触电阻: ≤20mΩ  
Contact resistance: ≤20mΩ

## 材料 MATERIAL

- ◆塑胶: 尼龙66 (Nylon66), UL94-V0

| REV.            | 新图面发行 | 2018. 11. 29 | UNIT: MM | GENERAL TOLERANCES |           | SCALE:<br>1:1                         | NAME | DATE         | PART. NO:<br>1.25T-4-NY |
|-----------------|-------|--------------|----------|--------------------|-----------|---------------------------------------|------|--------------|-------------------------|
|                 |       |              |          | LINEAR             | ANGLES    |                                       |      |              |                         |
|                 |       |              |          | 0.0±0.25           | X° REF±6° | APPROVED                              |      |              |                         |
| A0              |       |              |          | 0.00±0.15          | X° ±3°    | DESIGNER                              |      |              |                         |
|                 |       |              |          | 0.000±0.08         | X° X'±2°  | DRAWN                                 | 肖丽娟  | 2018. 11. 29 |                         |
| REVISION RECORD |       |              |          | DATE               | SIZE: A4  | TITLE:<br>1.25mm pitch Single Housing |      |              |                         |
|                 |       |              |          |                    |           | REV: A0 SHEET: 1/1                    |      |              |                         |


**东莞市康导新能源科技有限公司**  
 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD  
 公司网址: [www.dgoonne.cn](http://www.dgoonne.cn) 公司电话: 0769-85337533  
 邮箱: 2850175986@qq.com 公司传真: 0769-85392827