


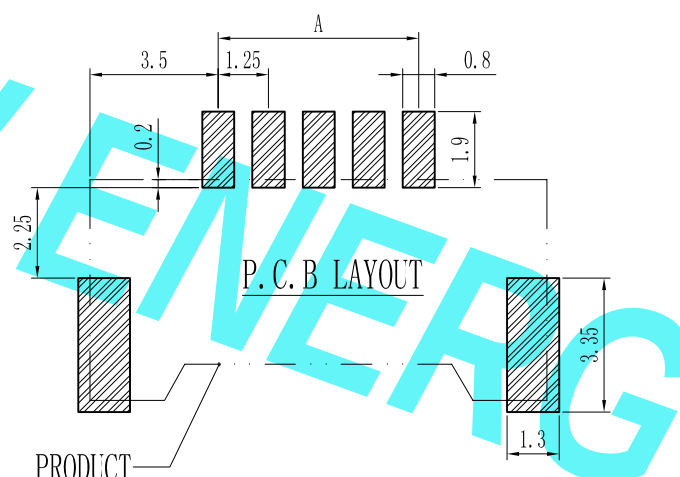
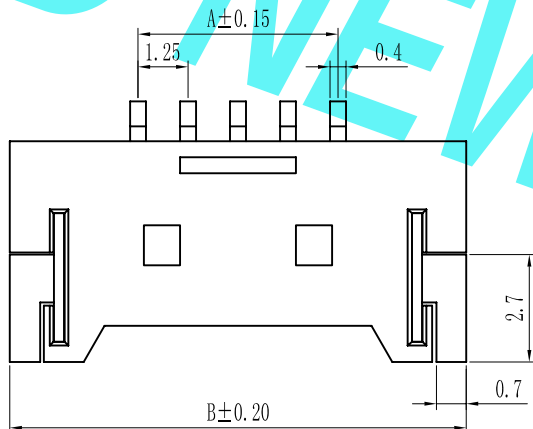
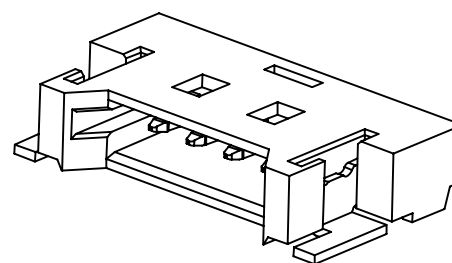
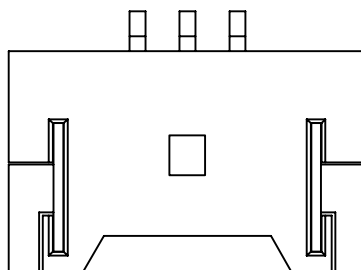


环保物料

Pin数	尺寸A	尺寸B
4	3.75	10.15
5	5.00	11.40
6	6.25	12.65
7	7.50	13.90
8	8.75	15.15
9	10.00	16.40
10	11.25	17.65
11	12.50	18.90
12	13.75	20.15
13	15.00	21.40
14	16.25	22.65
15	17.50	23.90
16	18.75	25.15
17	20.00	26.40
18	21.25	27.65
19	22.50	28.90
20	23.75	30.15
21	25.00	31.40
22	26.25	32.65
23	27.50	33.90
24	28.75	35.15
25	30.00	36.40
26	31.25	37.65
27	32.50	38.90



- 技术参数 SPECIFICATIONS

 - ◆极数: 2~30 Poles:2~30
 - ◆额定电压: AC,DC,125V (有效值)
Voltage rating: AC,DC,125V(rms)
 - ◆额定电流: 1.0A, AC, DC
Current rating:1.0A, AC, DC
 - ◆耐压值: 500V AC/minute
Withstand voltage:500V AC/minute
 - ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
 - ◆绝缘电阻: ≥100MΩ
Insulation resistance:≥100MΩ
 - ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ
- 材料 MATERIAL

 - ◆绝缘体: 尼龙9T, UL94-V0
Insulator:Nylon46, UL94-V0
 - ◆接触针: 黄铜
Cobtact PIN:Brass
 - ◆焊片: 黄铜
Solder tab:Brass

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 1.25T-4-NAW
				LINEAR	ANGLES	APPROVED				DWG. NO:
				0.0±0.25	X° REF±6°	DESIGNER				
A0	新图面发行	2018.11.29		0.00±0.15	X° ±3°	DRAWN	肖丽娟	2018.11.29		TITLE: 1.25mm pitch Single Wafer
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°					REV: A0 SHEET: 1/1