
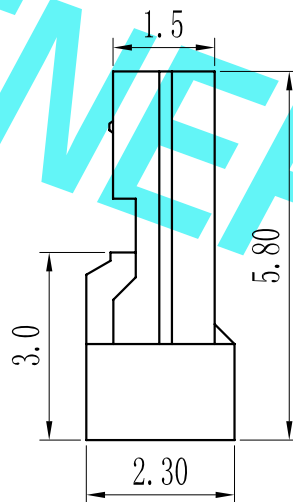
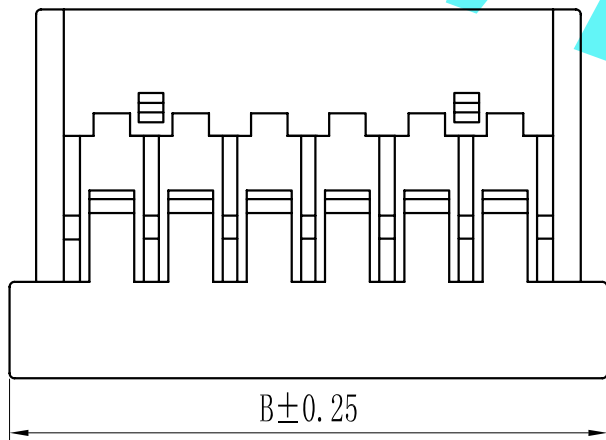


环保物料

Pin数	尺寸A	尺寸B
2	1.25	4.50
3	2.50	5.75
4	3.75	7.00
5	5.00	8.25
6	6.25	9.50
7	7.50	10.75
8	8.75	12.00
9	10.00	13.25
10	11.25	14.50
11	12.50	15.75
12	13.75	17.00
13	15.00	18.25
14	16.25	19.50
15	17.50	20.75
16	18.75	22.00
17	20.00	23.25
18	21.25	24.50
19	22.50	25.75
20	23.75	27.00
21	25.00	28.25
22	26.25	29.50
23	27.50	30.75
24	28.75	32.00
25	30.00	33.25

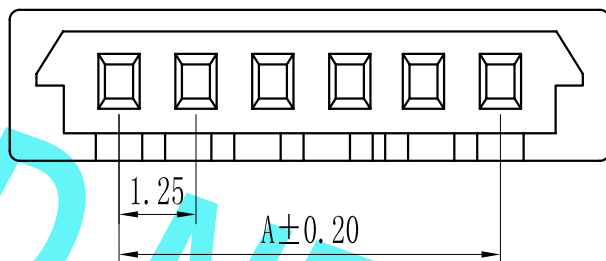

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28~#32
Applicable Wire: AWG#28~#32
- ◆额定电压: 125V DC, AC(rms)
Rated voltage: 125V DC, AC(rms)
- ◆额定电流: 1A(AWG #28)
Rated Current: 1A(AWG #28)
- ◆耐压值: 250V AC/minute
Withstand voltage: 250V AC/min
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: 100MΩ Min
Insulation resistance: ≥100MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance: ≤20mΩ

材料 MATERIAL

- ◆塑胶: 尼龙66 (Nylon66), UL94-V0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 1.25T-5 (DF14)-NY		
				LINEAR	ANGLES					APPROVED		
				0.0±0.25	X° REF±6°	DESIGNER						
A0	新图面发行	2018.11.29	UNIT: MM	0.00±0.15	X° ±3°	DRAWN	肖丽娟	2018.11.29		TITLE: 1.25mm pitch Single Housing	REV: A0 SHEET: 1/1	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°							