
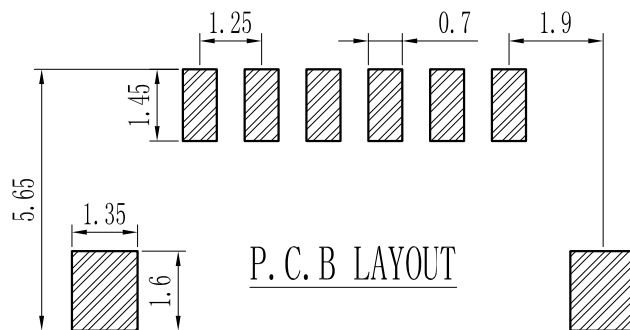
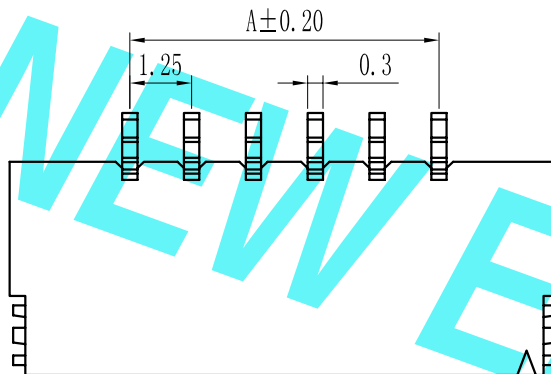


环保物料

Pin数	尺寸A	尺寸B
2	1.25	6.10
3	2.50	7.35
4	3.75	8.60
5	5.00	9.85
6	6.25	11.10
7	7.50	12.35
8	8.75	13.60
9	10.00	14.85
10	11.25	16.10
11	12.50	17.35
12	13.75	18.60
13	15.00	19.85
14	16.25	21.10
15	17.50	22.35
16	18.75	23.60
17	20.00	24.85
18	21.25	26.10
19	22.50	27.35
20	23.75	28.60
21	25.00	29.85
22	26.25	31.10
23	27.50	32.35
24	28.75	33.60
25	30.00	34.85

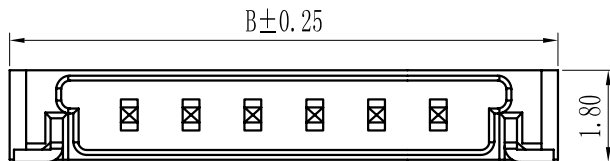

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28-#32
Applicable Wire:AWG#28-#32
- ◆额定电压: AC,DC, 125V (有效值)
Voltage rating: AC,DC, 125V(rms)
- ◆额定电流: 0.5A, AC, DC (AWG#28)
Current rating:0.5A, AC, DC (AWG#28)
- ◆耐压值: 250V AC/minute
Withstand voltage:250V AC/minute
- ◆工作温度 : -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻 : $\geq 100M\Omega$
Insulation resistance: $\geq 100M\Omega$
- ◆接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙6T, UL94-V0
Insulator:Nylon46, UL94-V0
- ◆接触针: 磷铜
Cobtact PIN:Phosphor bronze
- ◆焊片: 磷铜
Solder tab:Phosphor bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 1.25T-5 (DF14)	
				LINEAR	ANGLES					APPROVED	
				0.0±0.25	X° REF±6°	DESIGNER					
A0	新图面发行	2018.11.29	UNIT: MM	0.00±0.15	X° ±3°					TITLE: 1.25mm pitch Single Wafer	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.29		REV: A0	SHEET: 1/1