


环保物料

Pin数	尺寸A	尺寸B	尺寸C
4	3.75	8.50	6.50
5	5.00	9.75	7.75
6	6.25	11.00	9.02
7	7.50	12.25	10.29
8	8.75	13.50	11.56
9	10.00	14.75	12.83
10	11.25	16.00	14.10
11	12.50	17.25	15.37
12	13.75	18.50	16.64
13	15.00	19.75	17.91
14	16.25	21.00	19.18
15	17.50	22.25	20.45
16	18.75	23.50	21.72
17	20.00	24.75	22.99
18	21.25	26.00	24.26
19	22.50	27.25	25.53
20	23.75	28.50	26.80
21	25.00	29.75	28.07
22	26.25	31.00	29.34
23	27.50	32.25	30.61
24	28.75	33.50	31.88
25	30.00	34.75	33.15
26	31.25	36.00	34.42
27	32.50	37.25	35.69

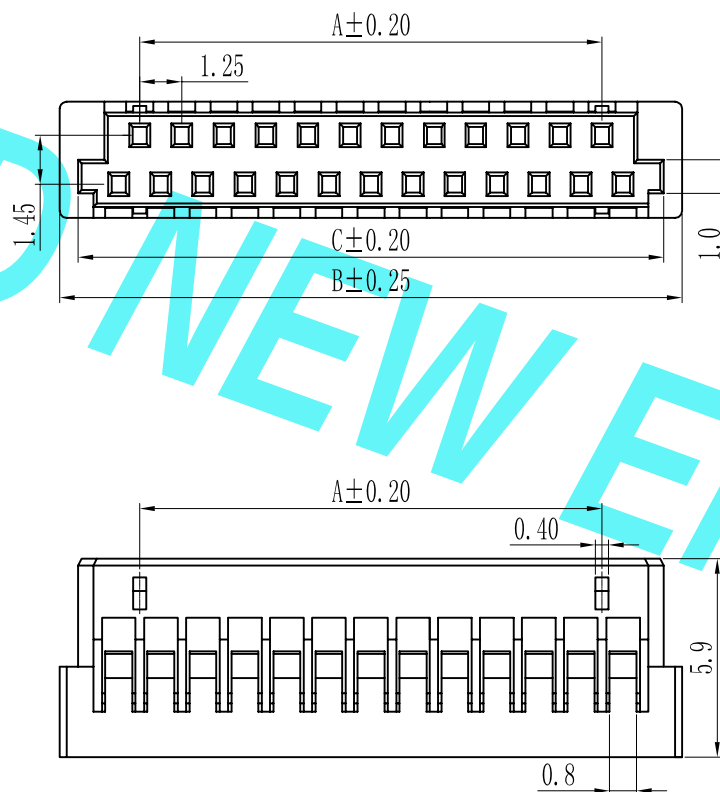

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28~#32
Applicable Wire: AWG#28~#32
- ◆额定电压: 125V DC, AC(rms)
Rated voltage: 125V DC, AC(rms)
- ◆额定电流: 1A(AWG #28)
Rated Current: 1A(AWG #28)
- ◆耐压值: 250V AC/minute
Withstand voltage: 250V AC/min
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: 100MΩ Min
Insulation resistance:≥100MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆塑胶: 尼龙66 (Nylon66), UL94-V0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 1.25T-6(CF1213)	
				LINEAR	ANGLES	APPROVED				DWG. NO:	
				0.0±0.25	X° REF±6°						
A0	新图面发行	2018.11.30	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				TITLE: 1.25mm pitch Dual Housing	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.30	REV: A0		SHEET: 1/1