


环保物料

技术参数 SPECIFICATIONS

- ◆间距: 1.25
Pitch:1.25
- ◆线数: 2~30
Poles:2~30
- ◆适用线规: AWG#28~#32
Applicable Wire: AWG#28~#32
- ◆额定电压: 150V DC,AC(rms)
Rated voltage: 150V DC,AC(rms)
- ◆额定电流: 1A(AWG #28)
Rated Current: 1A(AWG #28)
- ◆耐压值: 500V AC/minute
Withstand voltage: 500V AC/min
- ◆工作温度: -40℃~+85℃
Working Temp:-40℃~+85℃
- ◆绝缘电阻: 100MΩ Min
Insulation resistance:≥100MΩ
- ◆接触电阻: ≤40mΩ
Contact resistance:≤40mΩ

材料 MATERIAL

- ◆针座: 尼龙66
Wafer:Nylon66
- ◆端子: 磷青铜 镀金
Terminal: Phosphor bronze Gold-plated

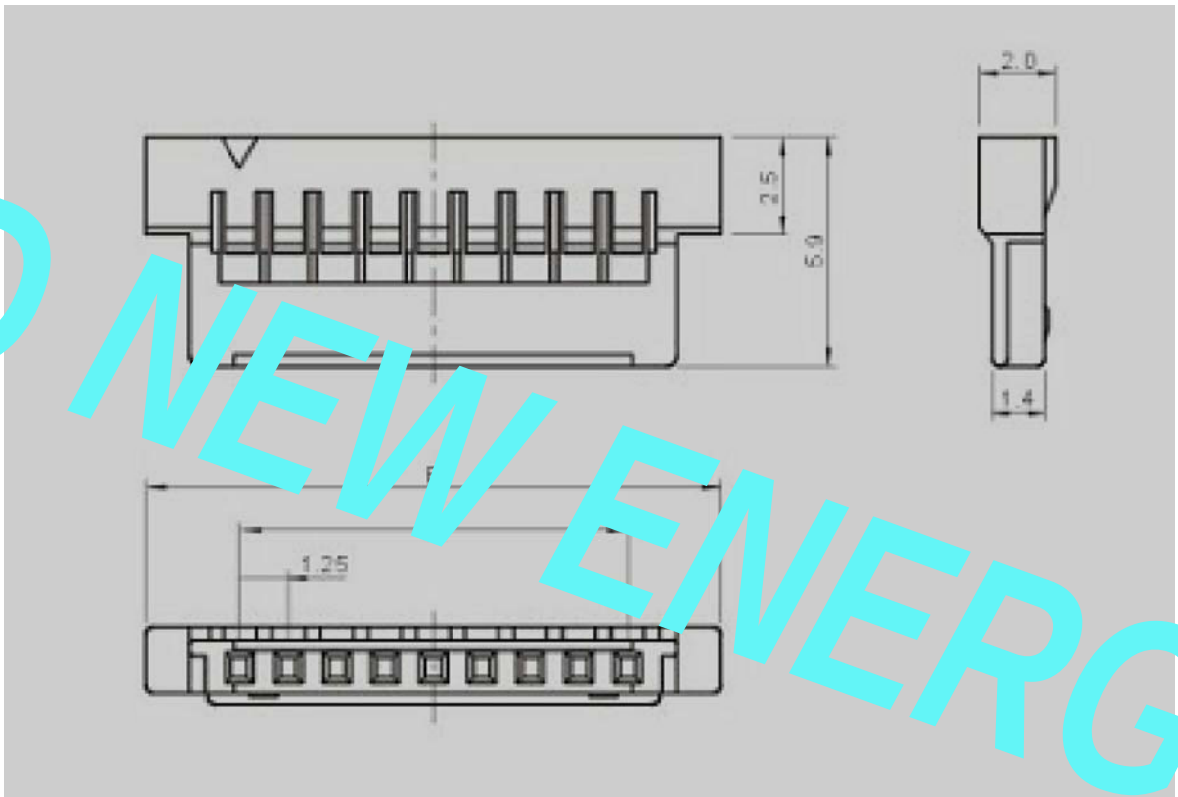

线数 Poles	编号 Part No	尺寸 Dimensions(mm)	
		A	B
2	1.25T-6-2Y	1.25	6.05
3	1.25T-6-3Y	2.50	7.30
4	1.25T-6-4Y	3.75	8.55
5	1.25T-6-5Y	5.00	9.80
6	1.25T-6-6Y	6.25	10.05
7	1.25T-6-7Y	7.50	12.30
8	1.25T-6-8Y	8.75	13.55
9	1.25T-6-9Y	10.00	14.80
10	1.25T-6-10Y	11.25	16.05
15	1.25T-6-15Y	17.50	22.30
20	1.25T-6-20Y	23.75	28.55
25	1.25T-6-25Y	30.00	34.80
30	1.25T-6-30Y	36.25	41.05

1.25 T-6-n Y

间距 (Pitch)
条形连接器 (Bar connector)
类型 (Type)
线数 (Poles)
A:A座 Y:Y座 A:A seat Y:Y seat

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgkonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 1.25T-6(CF1213单排)		
				LINEAR	ANGLES	APPROVED						DWG. NO:
				0.0±0.25	X° REF±6°							
AO	新图面发行	2018.11.30		UNIT: MM	0.00±0.15	X° ±3°				DESIGNER		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.11.30				