


# 环保物料

| Pin数 | 尺寸A   | 尺寸B   | 尺寸C   |
|------|-------|-------|-------|
| 2    | 1.25  | 3.65  | 1.90  |
| 3    | 2.50  | 4.90  | 3.15  |
| 4    | 3.75  | 6.15  | 4.40  |
| 5    | 5.00  | 7.40  | 5.65  |
| 6    | 6.25  | 8.65  | 6.90  |
| 7    | 7.50  | 9.90  | 8.15  |
| 8    | 8.75  | 11.15 | 9.40  |
| 9    | 10.00 | 12.40 | 10.65 |
| 10   | 11.25 | 13.65 | 11.90 |
| 11   | 12.50 | 14.90 | 13.15 |
| 12   | 13.75 | 16.15 | 14.40 |
| 13   | 15.00 | 17.40 | 15.65 |
| 14   | 16.25 | 18.65 | 16.90 |
| 15   | 17.50 | 19.90 | 18.15 |
| 16   | 18.75 | 21.15 | 19.40 |
| 17   | 20.00 | 22.40 | 20.65 |
| 18   | 21.25 | 23.65 | 21.90 |
| 19   | 22.50 | 24.90 | 23.15 |
| 20   | 23.75 | 26.15 | 24.40 |
| 21   | 25.00 | 27.40 | 25.65 |
| 22   | 26.25 | 28.65 | 26.90 |
| 23   | 27.50 | 29.90 | 28.15 |
| 24   | 28.75 | 31.15 | 29.40 |
| 25   | 30.00 | 32.40 | 30.65 |

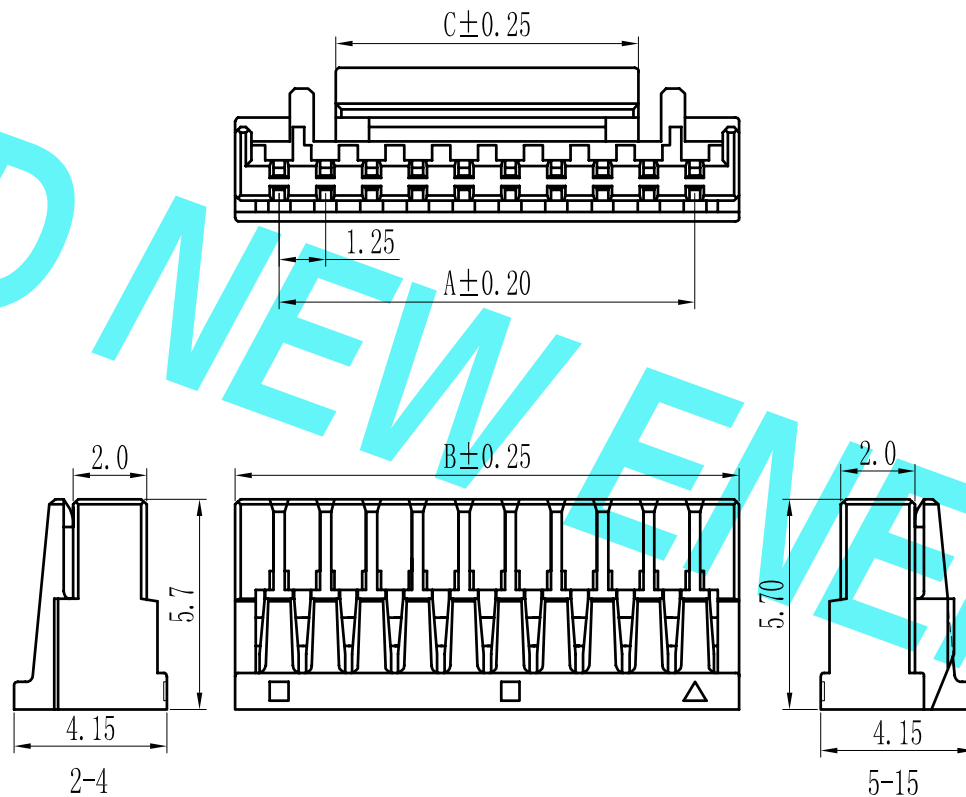

## 技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28~#32  
Applicable Wire: AWG#28~#32
- ◆额定电压: 125V DC,AC(rms)  
Rated voltage: 125V DC,AC(rms)
- ◆额定电流: 1A(AWG #28)  
Rated Current: 1A(AWG #28)
- ◆耐压值: 250V AC/minute  
Withstand voltage: 250V AC/min
- ◆工作温度: -25℃~+85℃  
Working Temp:-25℃~+85℃
- ◆绝缘电阻: 100MΩ Min  
Insulation resistance: ≥100MΩ
- ◆接触电阻: ≤20mΩ  
Contact resistance: ≤20mΩ

## 材料 MATERIAL

- ◆塑胶: 尼龙66 (Nylon66), UL94-V0

|      |                 |            |                                                                                     |                    |           |            |      |            |                                                                                                                                                                                                                                          |                      |
|------|-----------------|------------|-------------------------------------------------------------------------------------|--------------------|-----------|------------|------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
|      |                 |            |                                                                                     | GENERAL TOLERANCES |           | SCALE: 1:1 | NAME | DATE       |  <b>东莞市康导新能源科技有限公司</b><br>公司网址: <a href="http://www.dgoonne.cn">www.dgoonne.cn</a> 公司电话: 0769-85337533<br>邮箱: 2850175986@qq.com 公司传真: 0769-85392827 | PART. NO: 1.25T-7-NY |
|      |                 |            |  | LINEAR             | ANGLES    | APPROVED   |      |            |                                                                                                                                                                                                                                          | DWG. NO:             |
|      |                 |            |                                                                                     | 0.0±0.25           | X° REF±6° | DESIGNER   |      |            |                                                                                                                                                                                                                                          | REV: A0              |
| A0   | 新图面发行           | 2018.11.30 |                                                                                     | 0.00±0.15          | X° ±3°    | DRAWN      | 肖丽娟  | 2018.11.30 |                                                                                                                                                                                                                                          | SHEET: 1/1           |
| REV. | REVISION RECORD | DATE       | SIZE: A4                                                                            | 0.000±0.08         | X° X'±2°  |            |      |            | TITLE: 1.25mm pitch Single Housing                                                                                                                                                                                                       |                      |