
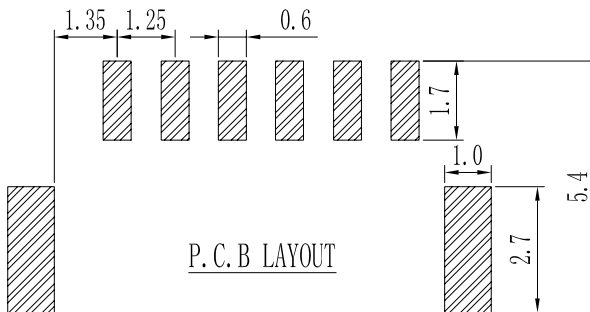
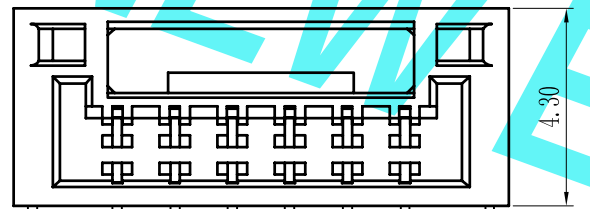


环保物料

Pin数	尺寸A	尺寸B
2	1.25	5.70
3	2.50	7.00
4	3.75	8.25
5	5.00	9.50
6	6.25	10.75
7	7.50	12.00
8	8.75	13.25
9	10.00	14.50
10	11.25	15.75
11	12.50	17.00
12	13.75	18.25
13	15.00	19.50
14	16.25	20.75
15	17.50	22.00
16	18.75	23.25
17	20.00	24.50
18	21.25	25.75
19	22.50	27.00
20	23.75	28.25
21	25.00	29.50
22	26.25	30.75
23	27.50	32.00
24	28.75	33.25
25	30.00	34.50

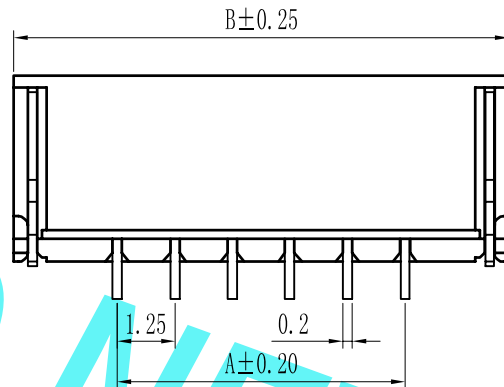

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28-#32
Applicable Wire: AWG#28-#32
- ◆额定电压: AC, DC, 125V (有效值)
Voltage rating: AC, DC, 125V(rms)
- ◆额定电流: 0.5A, AC, DC (AWG#28)
Current rating: 0.5A, AC, DC (AWG#28)
- ◆耐压值: 250V AC/minute
Withstand voltage: 250V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp: -25℃~+85℃
- ◆绝缘电阻: ≥100MΩ
Insulation resistance: ≥100MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance: ≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙6T, UL94-V0
Insulator: Nylon46, UL94-V0
- ◆接触针: 磷铜
Contact PIN: Phosphor bronze
- ◆焊片: 磷铜
Solder tab: Phosphor bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD. 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 1.25T-7-NAW	
				LINEAR	ANGLES	APPROVED				DWG. NO:	
A0	新图面发行	2018. 11. 30		0.00±0.25	X° REF±6°	DESIGNER				REV: A0 SHEET: 1/1	
REV.	REVISION RECORD	DATE		0.00±0.15	X° ±3°	DRAWN	肖丽娟	2018. 11. 30		TITLE: 1.25mm pitch Single Wafer	
			SIZE: A4	0.000±0.08	X° X'±2°						